# THE DATASHEET OF

# OPA349SA/3KG4

www.win-source.net 0086-755-83957316

# OPA349
# OPA2349

SBOS121B – JUNE 2000 – REVISED JANUARY 2004

# 1μA, Rail-to-Rail I/O CMOS OPERATIONAL AMPLIFIERS

## FEATURES

- **LOW SUPPLY CURRENT: 1μA**
- **GAIN-BANDWIDTH: 70kHz**
- **UNITY-GAIN STABLE**
- **LOW INPUT BIAS CURRENT: 10pA (max)**
- **WIDE SUPPLY RANGE: 1.8V to 5.5V**
- **INPUT RANGE: 200mV Beyond Rails**
- **OUTPUT SWINGS TO 350mV OF RAILS**
- **OUTPUT DRIVE CURRENT: 8mA**
- **OPEN-LOOP GAIN: 90dB**
- ***Micro*PACKAGES: SC70, SOT23-5, SOT23-8**

## APPLICATIONS

- **BATTERY PACKS AND POWER SUPPLIES**
- **PORTABLE PHONES, PAGERS, AND CAMERAS**
- **SOLAR-POWERED SYSTEMS**
- **SMOKE, GAS, AND FIRE DETECTION SYSTEMS**
- **REMOTE SENSORS**
- **PCMCIA CARDS**
- **DRIVING ANALOG-TO-DIGITAL (A/D) CONVERTERS**
- ***Micro*POWER FILTERS**

### OPAx349 RELATED PRODUCTS

| FEATURES | PRODUCT |
|---|---|
| 1μA, 5.5kHz, Rail-To-Rail | TLV240x |
| 1μA, 5.5kHz, Rail-To-Rail | TLV224x |
| 7μA, 160kHz, Rail-To-Rail, 2.7V to 16V Supply | TLV238x |
| 7μA, 160kHz, Rail-To-Rail, Micro Power | TLV27Lx |
| 20μA, 500kHz, Rail-To-Rail, 1.8V Micro Power | TLV276x |
| 20μA, 350kHz, Rail-To-Rail, Micro Power | OPAx347 |
| 45μA, 1MHz, Rail-To-Rail, 2.1V to 5.5V Supply | OPAx348 |

## DESCRIPTION

The OPA349 and OPA2349 are ultra-low power operational amplifiers that provide 70kHz bandwidth with only 1μA quiescent current. These rail-to-rail input and output amplifiers are specifically designed for battery-powered applications. The input common-mode voltage range extends 200mV beyond the power-supply rails and the output swings to within 350mV of the rails, maintaining wide dynamic range. Unlike some micropower op amps, these parts are unity-gain stable and require no external compensation to achieve wide bandwidth. The OPA349 features a low input bias current that allows the use of large source and feedback resistors.

The OPA349 can be operated with power supplies from 1.8V to 5.5V with little change in performance, ensuring continuing superior performance even in low battery situations.

The OPA349 comes in miniature SOT23-5, SC70, and SO-8 surface-mount packages. The OPA2349 dual is available in SOT23-8, and SO-8 surface-mount packages. These tiny packages are ideal for use in high-density applications, such as PCMCIA cards, battery packs, and portable instruments.

The OPA349 is specified for 0°C to +70°C. The OPA2349 is specified for –40°C to +70°C.

OPEN-LOOP GAIN AND PHASE vs FREQUENCY




Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

All trademarks are the property of their respective owners.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

Copyright © 2000-2004, Texas Instruments Incorporated
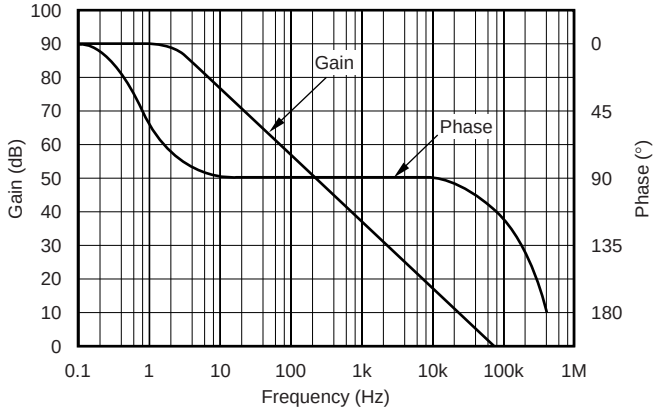
## ABSOLUTE MAXIMUM RATINGS[1]

| | |
|---|---|
| Supply Voltage, V+ to V– | 5.5V |
| Signal Input Terminals, Voltage[2] | (V–) – 0.5V to (V+) + 0.5V |
| Current[2] | 10mA |
| Output Short Circuit[3] | Continuous |
| Operating Temperature, OPA2349 | –55°C to +125°C |
| Operating Temperature, OPA349 | 0°C to +85°C |
| Storage Temperature | –65°C to +150°C |
| Junction Temperature | 150°C |
| Lead Temperature (soldering, 3s) | 300°C |

NOTES: (1) Stresses above these ratings may cause permanent damage. Exposure to absolute maximum conditions for extended periods may degrade device reliability. These are stress ratings only, and functional operation of the device at these, or any other conditions beyond those specified, is not implied. (2) Input terminals are diode-clamped to the power-supply rails. Input signals that can swing more than 0.5V beyond the supply rails should be current-limited to 10mA or less. (3) Short-circuit to ground, one amplifier per package.

## ELECTROSTATIC DISCHARGE SENSITIVITY

This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

## PACKAGE/ORDERING INFORMATION[1]

| PRODUCT | PACKAGE | PACKAGE DESIGNATOR[1] | PACKAGE MARKING | ORDERING NUMBER | TRANSPORT MEDIA, QUANTITY |
|---|---|---|---|---|---|
| **Single** | | | | | |
| OPA349NA | SOT23-5 | DBV | A49 | OPA349NA/250 | Tape and Reel, 250 |
| " | " | " | " | OPA349NA/3K | Tape and Reel, 3000 |
| OPA349UA | SO-8 | D | OPA349UA | OPA349UA | Rails, 100 |
| " | " | " | " | OPA349UA/2K5 | Tape and Reel, 2500 |
| OPA349SA | SC70-5 | DCK | S49 | OPA349SA/250 | Tape and Reel, 250 |
| " | " | " | " | OPA349SA/3K | Tape and Reel, 3000 |
| **Dual** | | | | | |
| OPA2349EA | SOT23-8 | DCN | C49 | OPA2349EA/250 | Tape and Reel, 250 |
| " | " | " | " | OPA2349EA/3K | Tape and Reel, 3000 |
| OPA2349UA | SO-8 | D | OPA2349UA | OPA2349UA | Rails, 100 |
| " | " | " | " | OPA2349UA/2K5 | Tape and Reel, 2500 |

NOTE: (1) For the most current package and ordering information, see the Package Option Addendum located at the end of this data sheet.

## PIN CONFIGURATIONS



SO-8



SOT23-8, SO-8



SOT23-5



SC70-5

NOTE: (1) NC indicates no internal connection.

# ELECTRICAL CHARACTERISTICS (Single): $V_S$ = +1.8V to +5.5V

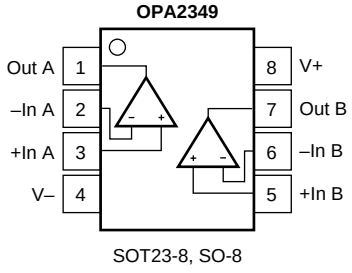**Boldface** limits apply over the specified temperature range, **$T_A$ = 0°C to +70°C.**

At $T_A$ = +25°C, and $R_L$ = 1MΩ connected to $V_S$/2, unless otherwise noted.

| PARAMETER | | CONDITION | OPA349 MIN | OPA349 TYP(1) | OPA349 MAX | UNITS |
|---|---|---|---|---|---|---|
| **OFFSET VOLTAGE** | | | | | | |
| Input Offset Voltage | $V_{OS}$ | $V_S$ = 5V, $V_{CM}$ = 2.5V | | ±2 | ±10 | mV |
| **Over Temperature** | | | | **±2** | **±13** | **mV** |
| **Drift** | **$dV_{OS}/dT$** | | | **±15** | | **µV/°C** |
| vs Power-Supply Rejection Ratio | PSRR | $V_S$ = 1.8V to 5.5V, $V_{CM}$ = (V–) + 0.3V | | 350 | 1000 | µV/V |
| **Over Temperature** | | | | | **3000** | **µV/V** |
| **INPUT VOLTAGE RANGE** | | | | | | |
| Common-Mode Voltage Range | $V_{CM}$ | | (V–) – 0.2 | | (V+) + 0.2 | V |
| Common-Mode Rejection Ratio | CMRR | $V_S$ = +5V, –0.2V < $V_{CM}$ < 5.2V | 48 | 60 | | dB |
| **Over Temperature** | | | **46** | | | **dB** |
| | | $V_S$ = +5V, –0.2V < $V_{CM}$ < 3.5V | 52 | 72 | | dB |
| **Over Temperature** | | | **50** | | | **dB** |
| **INPUT BIAS CURRENT** | | | | | | |
| Input Bias Current | $I_B$ | | | ±0.5 | ±10 | pA |
| Input Offset Current | $I_{OS}$ | | | ±1 | ±10 | pA |
| **INPUT IMPEDANCE** | | | | | | |
| Differential | | | | $10^{13}$ \|\| 2 | | Ω \|\| pF |
| Common-Mode | | | | $10^{13}$ \|\| 4 | | Ω \|\| pF |
| **NOISE** | | | | | | |
| Input Voltage Noise, f = 0.1Hz to 10Hz | | | | 8 | | µVp-p |
| Input Voltage Noise Density, f = 1kHz | $e_n$ | | | 300 | | nV/√Hz |
| Current Noise Density, f = 1kHz | $i_n$ | | | 4 | | fA/√Hz |
| **OPEN-LOOP GAIN** | | | | | | |
| Open-Loop Voltage Gain | $A_{OL}$ | $R_L$ = 1MΩ, $V_S$ = +5.5V, +0.3V < $V_O$ < +5.2V | 74 | 90 | | dB |
| **Over Temperature** | | | **72** | | | **dB** |
| Open-Loop Voltage Gain | $A_{OL}$ | $R_L$ = 10kΩ, $V_S$ = +5.5V, +0.35V < $V_O$ < +5.15V | 74 | 90 | | dB |
| **Over Temperature** | | | **60** | | | **dB** |
| **OUTPUT** | | | | | | |
| Voltage Output Swing from Rail | | $R_L$ = 1MΩ, $V_S$ = +5.5V, $A_{OL}$ > 74dB | | | 300 | mV |
| **Over Temperature** | | | | | **300** | **mV** |
| | | $R_L$ = 10kΩ, $V_S$ = +5.5V, $A_{OL}$ > 74dB | | | 350 | mV |
| **Over Temperature** | | | | | **350** | **mV** |
| Output Current | | | | ±8 | | mA |
| Short-Circuit Current | $I_{SC}$ | | | ±10 | | mA |
| Capacitive Load Drive | $C_{LOAD}$ | See Typical Characteristics | | | | |
| **FREQUENCY RESPONSE** | | $C_L$ = 10pF | | | | |
| Gain-Bandwidth Product | GBW | G = +1 | | 70 | | kHz |
| Slew Rate | SR | $V_S$ = +5V, G = +1 | | 0.02 | | V/µs |
| Settling Time, 0.1% | $t_S$ | $V_S$ = 5V, 1V Step | | 65 | | µs |
| 0.01% | | $V_S$ = 5V, 1V Step | | 80 | | µs |
| Overload Recovery Time | | $V_{IN}$ • Gain = $V_S$ | | 5 | | µs |
| **POWER SUPPLY** | | | | | | |
| Specified Voltage Range | $V_S$ | | +1.8 | | +5.5 | V |
| Quiescent Current (per amplifier) | $I_Q$ | $I_O$ = 0 | | 1 | 2 | µA |
| **Over Temperature** | | | | | **10** | **µA** |
| **TEMPERATURE RANGE** | | | | | | |
| Specified Range | | | 0 | | +70 | °C |
| Operating Range | | | 0 | | +85 | °C |
| Storage Range | | | –65 | | +150 | °C |
| Thermal Resistance | $\theta_{JA}$ | | | | | |
| SOT23-5 Surface-Mount | | | | 200 | | °C/W |
| SO-8 Surface-Mount | | | | 150 | | °C/W |
| SC70-5 Surface-Mount | | | | 250 | | °C/W |

NOTE: (1) Refer to Typical Characteristic curves.

# ELECTRICAL CHARACTERISTICS (Dual): $V_S$ = +1.8V to +5.5V

**Boldface** limits apply over the specified temperature range, $T_A$ = –40°C to +70°C.

At $T_A$ = +25°C, and $R_L$ = 1MΩ connected to $V_S$/2, unless otherwise noted.

| PARAMETER | | CONDITION | OPA2349 MIN | OPA2349 TYP(1) | OPA2349 MAX | UNITS |
|---|---|---|---|---|---|---|
| **OFFSET VOLTAGE** | | | | | | |
| Input Offset Voltage | $V_{OS}$ | $V_S$ = 5V, $V_{CM}$ = 2.5V | | ±2 | ±10 | mV |
| **Over Temperature** | | | | **±2** | **±13** | **mV** |
| **Drift** | **$dV_{OS}/dT$** | | | **±15** | | **µV/°C** |
| vs Power Supply | PSRR | $V_S$ = 1.8V to 5.5V, $V_{CM}$ = (V–) + 0.3V | | 350 | 1000 | µV/V |
| **Over Temperature** | | | | | **3000** | **µV/V** |
| Channel Separation, dc | | $R_L$ = 100kΩ | | 10 | | µV/V |
| | | f = 1kHz | | 66(1) | | dB |
| **INPUT VOLTAGE RANGE** | | | | | | |
| Common-Mode Voltage Range | $V_{CM}$ | | (V–) – 0.2 | | (V+) + 0.2 | V |
| Common-Mode Rejection Ratio | CMRR | $V_S$ = +5V, –0.2V < $V_{CM}$ < 5.2V | 48 | 60 | | dB |
| **Over Temperature** | | | **46** | | | **dB** |
| | | $V_S$ = +5V, –0.2V < $V_{CM}$ < 3.5V | 52 | 72 | | dB |
| **Over Temperature** | | | **50** | | | **dB** |
| **INPUT BIAS CURRENT** | | | | | | |
| Input Bias Current | $I_B$ | | | ±0.5 | ±10 | pA |
| Input Offset Current | $I_{OS}$ | | | ±1 | ±10 | pA |
| **INPUT IMPEDANCE** | | | | | | |
| Differential | | | | $10^{13}$ \|\| 2 | | Ω \|\| pF |
| Common-Mode | | | | $10^{13}$ \|\| 4 | | Ω \|\| pF |
| **NOISE** | | | | | | |
| Input Voltage Noise, f = 0.1Hz to 10Hz | | | | 8 | | µVp-p |
| Input Voltage Noise Density, f = 1kHz | $e_n$ | | | 300 | | $nV/\sqrt{Hz}$ |
| Current Noise Density, f = 1kHz | $i_n$ | | | 4 | | $fA/\sqrt{Hz}$ |
| **OPEN-LOOP GAIN** | | | | | | |
| Open-Loop Voltage Gain | $A_{OL}$ | $R_L$ = 1MΩ, $V_S$ = +5.5V, +0.3V < $V_O$ < +5.2V | 74 | 90 | | dB |
| **Over Temperature** | | | **72** | | | **dB** |
| Open-Loop Voltage Gain | $A_{OL}$ | $R_L$ = 10kΩ, $V_S$ = +5.5V, +0.35V < $V_O$ < +5.15V | 74 | 90 | | dB |
| **Over Temperature** | | | **60** | | | **dB** |
| **OUTPUT** | | | | | | |
| Voltage Output Swing from Rail | | $R_L$ = 1MΩ, $V_S$ = +5.5V, $A_{OL}$ > 74dB | | 150 | 300 | mV |
| **Over Temperature** | | | | | **300** | **mV** |
| | | $R_L$ = 10kΩ, $V_S$ = +5.5V, $A_{OL}$ > 74dB | | 200 | 350 | mV |
| **Over Temperature** | | | | | **350** | **mV** |
| Output Current | | | | ±8 | | mA |
| Short-Circuit Current | $I_{SC}$ | | | ±10 | | mA |
| **FREQUENCY RESPONSE** | | $C_L$ = 10pF | | | | |
| Gain-Bandwidth Product | GBW | G = +1 | | 70 | | kHz |
| Slew Rate | SR | $V_S$ = +5V, G = +1 | | 0.02 | | V/µs |
| Settling Time, 0.1% | $t_S$ | $V_S$ = 5V, 1V Step | | 65 | | µs |
| 0.01% | | $V_S$ = 5V, 1V Step | | 80 | | µs |
| Overload Recovery Time | | $V_{IN}$ • Gain = $V_S$ | | 5 | | µs |
| **POWER SUPPLY** | | | | | | |
| Specified Voltage Range | $V_S$ | | +1.8 | | +5.5 | V |
| Quiescent Current (per amplifier) | $I_Q$ | $I_O$ = 0 | | 1 | 2 | µA |
| **Over Temperature** | | | | | **10** | **µA** |
| **TEMPERATURE RANGE** | | | | | | |
| Specified Range | | | –40 | | +70 | °C |
| Operating Range | | | –40 | | +85 | °C |
| Storage Range | | | –65 | | +150 | °C |
| Thermal Resistance | $\theta_{JA}$ | | | | | |
| SOT23-8 Surface-Mount | | | | 200 | | °C/W |
| SO-8 Surface-Mount | | | | 150 | | °C/W |

NOTE: (1) Refer to Typical Characteristic curves.

# TYPICAL CHARACTERISTICS

At $T_A$ = +25°C, $V_S$ = +5V, and $R_L$ = 1MΩ connected to $V_S$/2, unless otherwise noted.

OPEN-LOOP GAIN AND PHASE vs FREQUENCY




OPEN-LOOP GAIN vs TEMPERATURE




COMMON-MODE REJECTION RATIO vs FREQUENCY

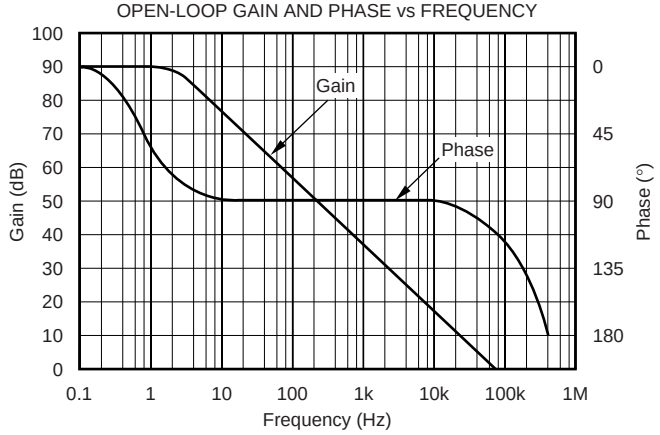


COMMON-MODE REJECTION RATIO
vs TEMPERATURE

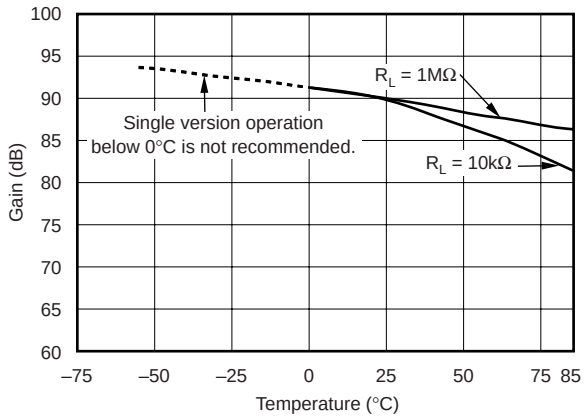


POWER-SUPPLY REJECTION RATIO vs FREQUENCY

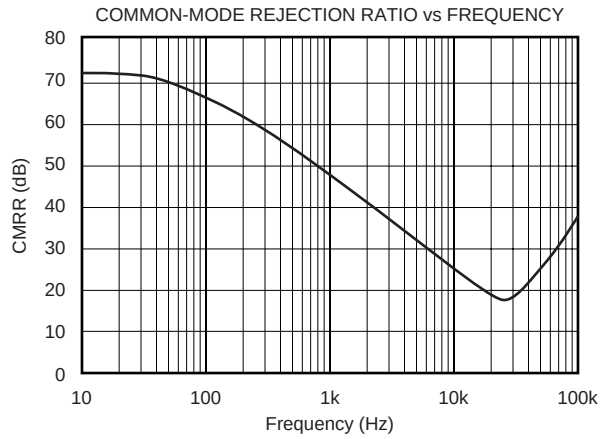


POWER-SUPPLY REJECTION RATIO
vs TEMPERATURE



# TYPICAL CHARACTERISTICS (Cont.)

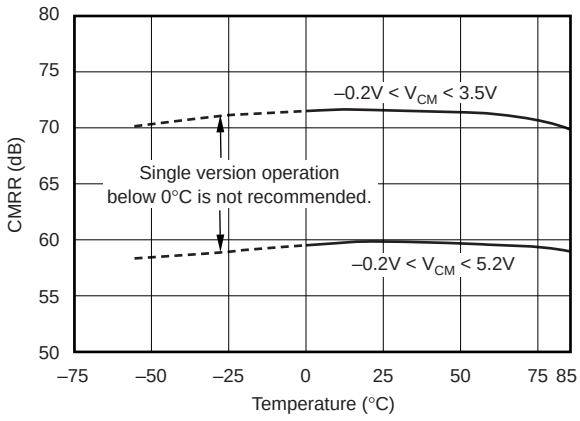At $T_A$ = +25°C, $V_S$ = +5V, and $R_L$ = 1MΩ connected to $V_S$/2, unless otherwise noted.

QUIESCENT CURRENT vs TEMPERATURE

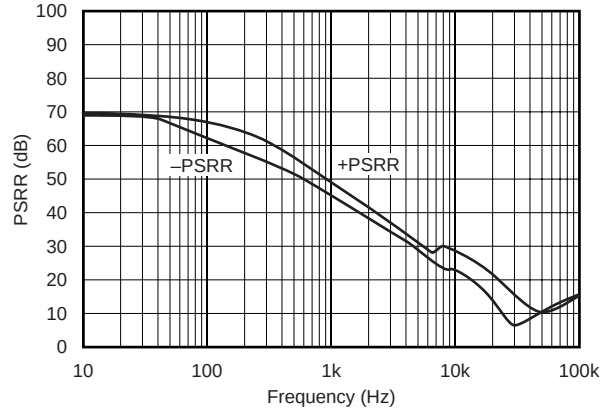


QUIESCENT AND SHORT-CIRCUIT vs SUPPLY VOLTAGE

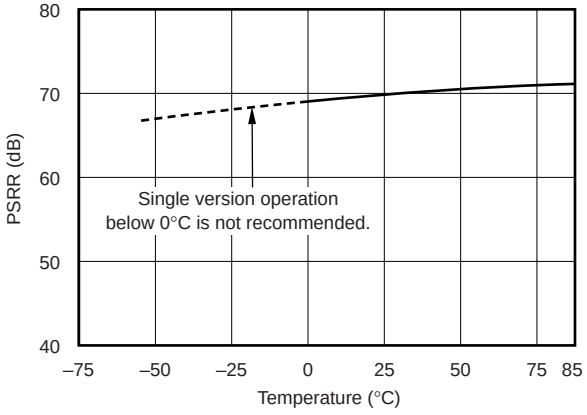


SHORT-CIRCUIT CURRENT vs TEMPERATURE

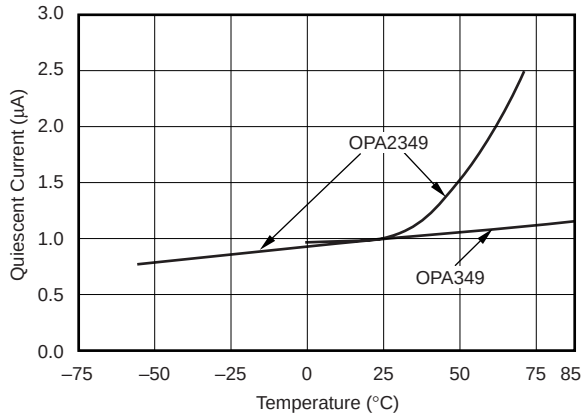


INPUT BIAS CURRENT vs TEMPERATURE

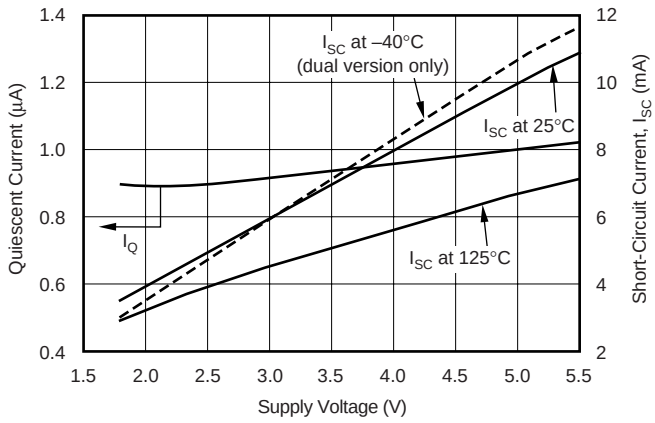


INPUT VOLTAGE NOISE DENSITY

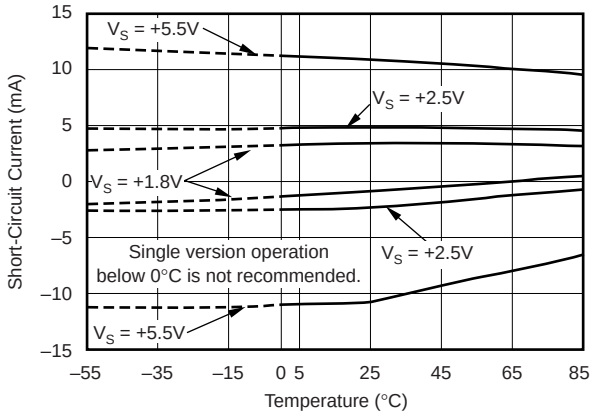


CHANNEL SEPARATION vs FREQUENCY



# TYPICAL CHARACTERISTICS (Cont.)

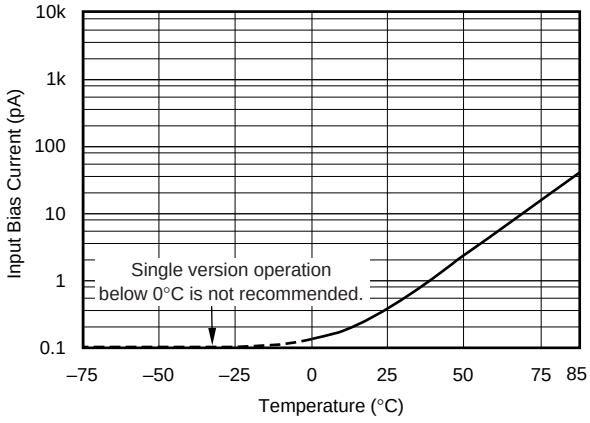At $T_A$ = +25°C, $V_S$ = +5V, and $R_L$ = 1MΩ connected to $V_S$/2, unless otherwise noted.

OFFSET VOLTAGE DRIFT
PRODUCTION DISTRIBUTION

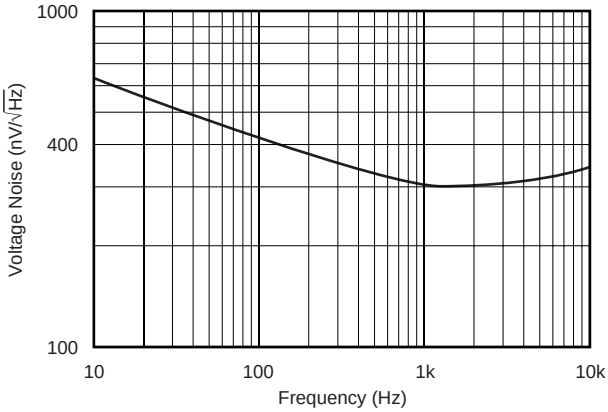


OUTPUT VOLTAGE vs OUTPUT CURRENT

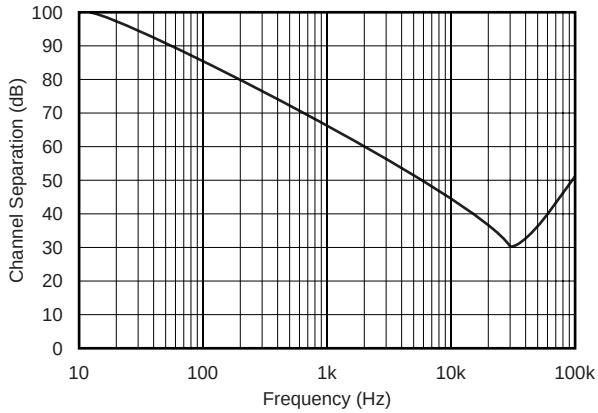


MAXIMUM OUTPUT VOLTAGE vs FREQUENCY

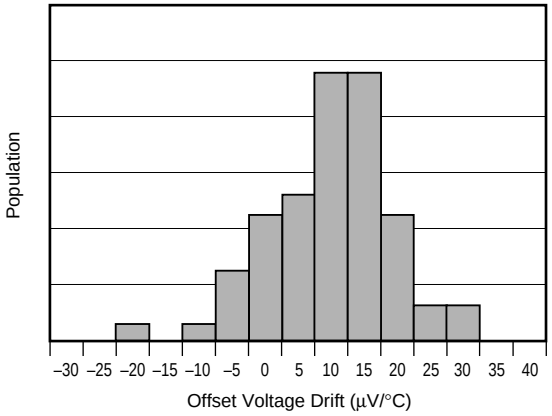


LARGE-SIGNAL STEP RESPONSE
G = 1, $R_L$ = 1MΩ

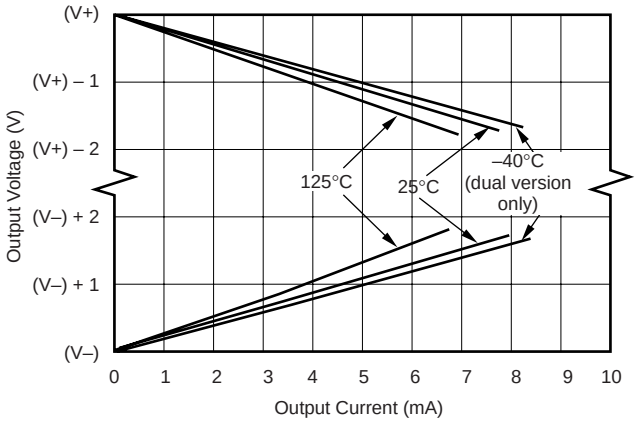


SMALL-SIGNAL STEP RESPONSE
G = 1, $R_L$ = 1MΩ, $C_L$ = 20pF

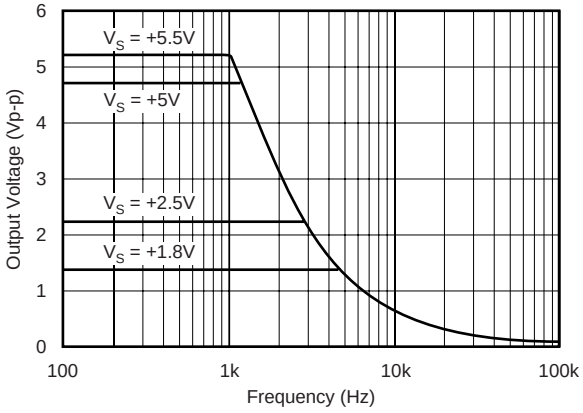


SMALL-SIGNAL STEP RESPONSE
G = 1, $R_L$ = 1MΩ, $C_L$ = 500pF



# TYPICAL CHARACTERISTICS (Cont.)

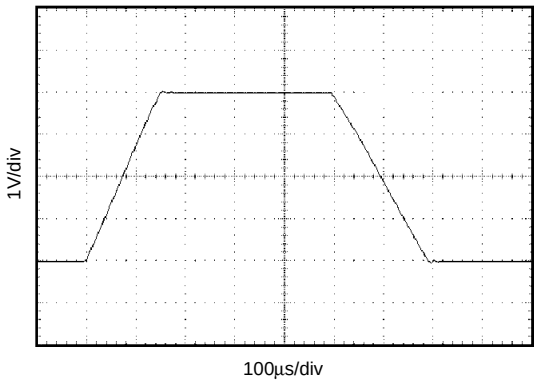At $T_A$ = +25°C, $V_S$ = +5V, and $R_L$ = 1MΩ connected to $V_S$/2, unless otherwise noted.

SMALL-SIGNAL OVERSHOOT vs LOAD CAPACITANCE
(SC70)

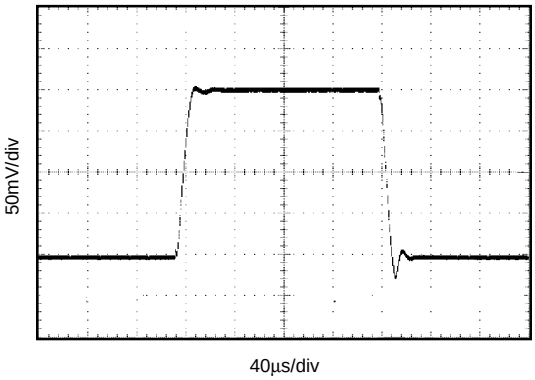


SMALL-SIGNAL OVERSHOOT vs LOAD CAPACITANCE
(SOT23, SO-8)

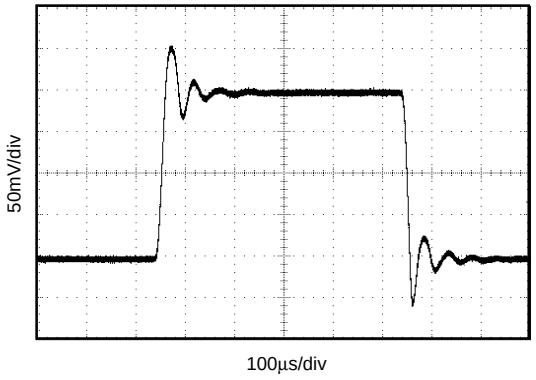

# APPLICATIONS INFORMATION

The OPA349 series op amps are unity-gain stable and can operate on a single supply, making them highly versatile and easy to use. Power-supply pins should be bypassed with 0.01µF ceramic capacitors.

The OPA349 series op amps are fully specified and tested from +1.8V to +5.5V. Parameters that vary significantly with operating voltages or temperature are shown in the Typical Characteristic curves.

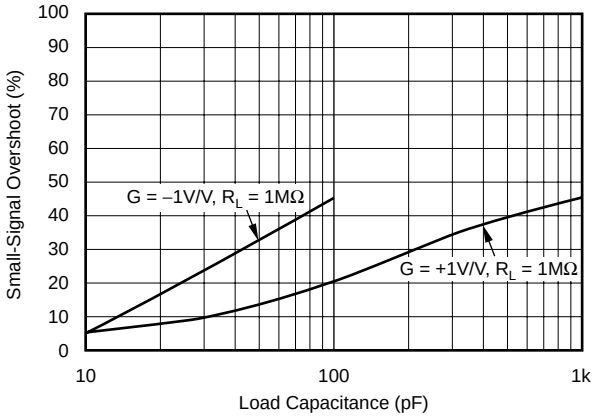The ultra-low quiescent current of the OPA349 requires careful application circuit techniques to achieve low overall current consumption. Figure 1 shows an ac-coupled amplifier biased with a voltage divider. Resistor values must be very large to minimize current. The large feedback resistor value reacts with input capacitance and stray capacitance to produce a pole in the feedback network. A feedback capacitor may be required to assure stability and limit overshoot or gain peaking. Check circuit performance carefully to assure that biasing and feedback techniques meet signal and quiescent current requirements.

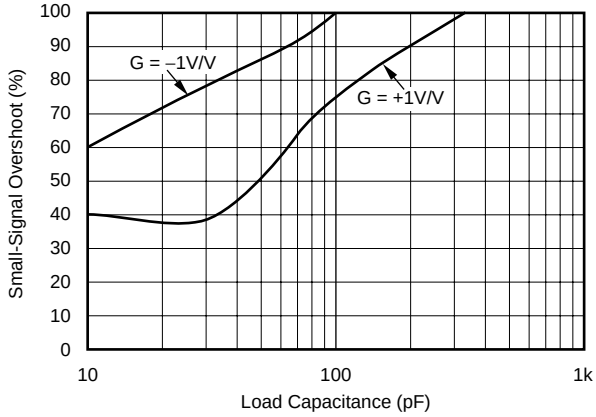


FIGURE 1. AC-Coupled Amplifier.

## RAIL-TO-RAIL INPUT

The input common-mode voltage range of the OPA349 series extends 200mV beyond the supply rails. This is achieved with a complementary input stage—an N-channel input differential pair in parallel with a P-channel differential pair (as shown in Figure 2). The N-channel pair is active for input voltages close to the positive rail, typically (V+) – 1.3V to 200mV above the positive supply, while the P-channel pair is on for inputs from 200mV below the negative supply to approximately (V+) – 1.3V. There is a small transition region, typically (V+) – 1.5V to (V+) – 1.1V, in which both pairs are on. This 400mV transition region can vary 300mV with process variation. Thus, the transition region (both stages on) can range from (V+) – 1.8V to (V+) – 1.4V on the low end, up to (V+) – 1.2V to (V+) – 0.8V on the high end. Within the 400mV transition region PSRR, CMRR, offset voltage, offset drift, and THD may be degraded compared to operation outside this region. For more information on designing with rail-to-rail input op amps, see Figure 3, *Design Optimization with Rail-to-Rail Input Op Amps*.

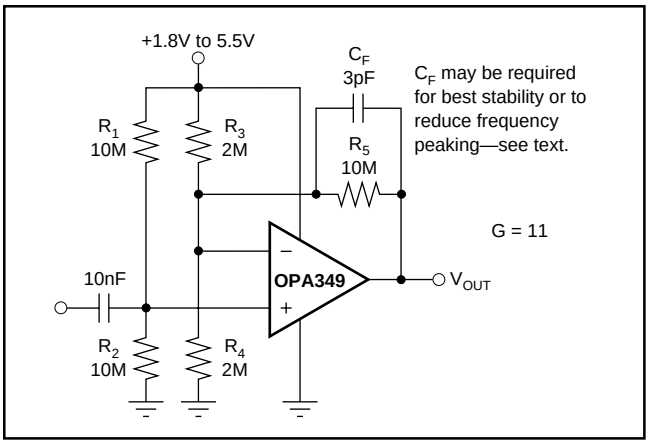


FIGURE 2. Simplified Schematic.

## DESIGN OPTIMIZATION WITH RAIL-TO-RAIL INPUT OP AMPS

In most applications, operation is within the range of only one differential pair. However, some applications can subject the amplifier to a common-mode signal in the transition region. Under this condition, the inherent mismatch between the two differential pairs may lead to degradation of the CMRR and THD. The unity-gain buffer configuration is the most problematic—it will traverse through the transition region if a sufficiently wide input swing is required. A design option would be to configure the op amp as a unity-gain inverter as shown below and hold the noninverting input at a set common-mode voltage outside the transition region. This can be accomplished with a voltage divider from the supply. The voltage divider should be designed such that the biasing point for the noninverting input is outside the transition region.

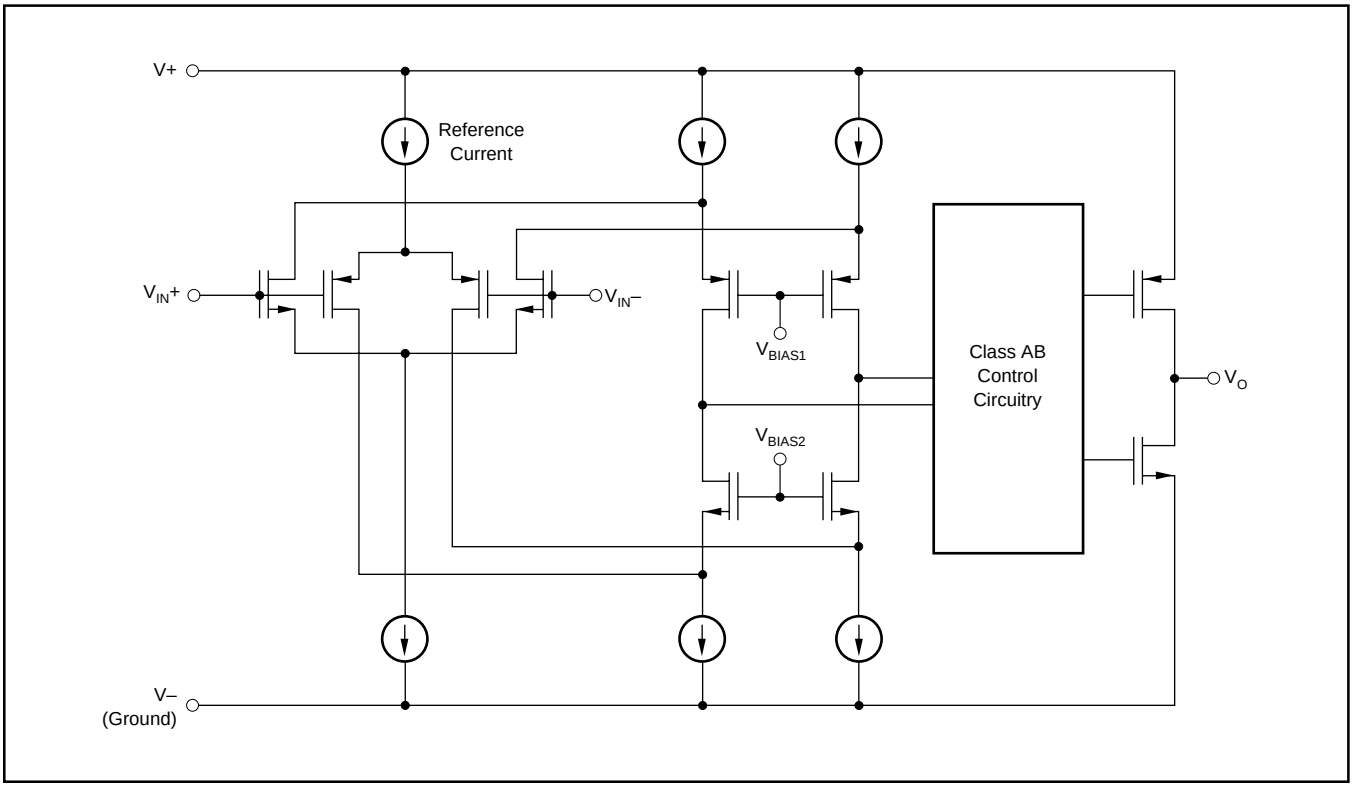


FIGURE 3. Design Optimization.

### COMMON-MODE REJECTION

The CMRR for the OPA349 is specified in two ways so the best match for a given application may be used. First, the CMRR of the device in the common-mode range below the transition region ($V_{CM}$ < (V+) – 1.5V) is given. This specification is the best indicator of the capability of the device when the application requires use of one of the differential input pairs. Second, the CMRR at $V_S$ = 5V over the entire common-mode range is specified.

### OUTPUT DRIVEN TO V– RAIL

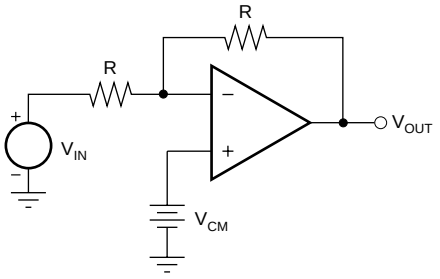Loads that connect to single-supply ground (or the V– supply pin) can cause the OPA349 or OPA2349 to oscillate if the output voltage is driven into the negative rail (as shown in Figure 4a). Similarly, loads that can cause current to flow out of the output pin when the output voltage is near V– can cause oscillations. The op amp will recover to normal operation a few microseconds after the output is driven positively out of the rail.

Some op amp applications can produce this condition even without a load connected to V–. The integrator in Figure 4b shows an example of this effect. Assume that the output ramps negatively, and saturates near 0V. Any negative-going step at $V_{IN}$ will produce a positive output current pulse through $R_1$ and $C_1$. This may incite the oscillation. Diode $D_1$ prevents the input step from pulling output current when the output is saturated at the rail, thus preventing the oscillation.

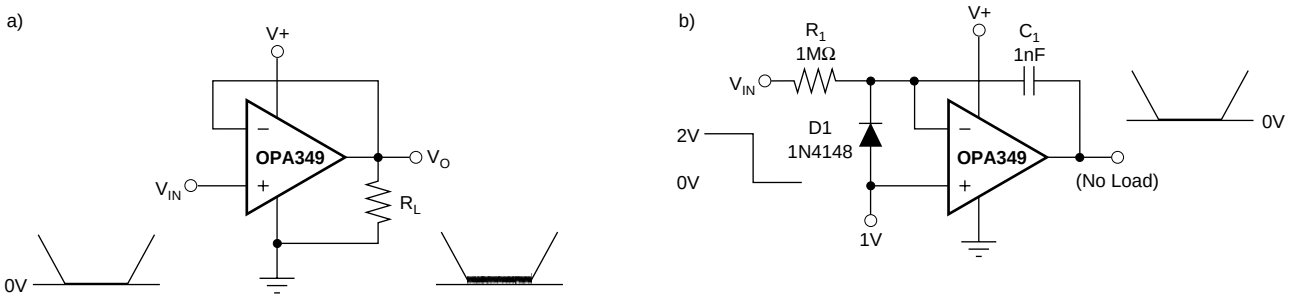


FIGURE 4. Output Driven to Negative Rail.

## PACKAGING INFORMATION

| Orderable Device | Status (1) | Package Type | Package Drawing | Pins | Package Qty | Eco Plan (2) | Lead/Ball Finish (6) | MSL Peak Temp (3) | Op Temp (°C) | Device Marking (4/5) | Samples |
|---|---|---|---|---|---|---|---|---|---|---|---|
| HPA00215EA/3K | ACTIVE | SOT-23 | DCN | 8 | 3000 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-2-260C-1 YEAR | -55 to 125 | C49 | Samples |
| OPA2349EA/250 | ACTIVE | SOT-23 | DCN | 8 | 250 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-2-260C-1 YEAR | -55 to 125 | C49 | Samples |
| OPA2349EA/3K | ACTIVE | SOT-23 | DCN | 8 | 3000 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-2-260C-1 YEAR | -55 to 125 | C49 | Samples |
| OPA2349UA | ACTIVE | SOIC | D | 8 | 75 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-2-260C-1 YEAR | -55 to 125 | OPA 2349UA | Samples |
| OPA2349UA/2K5 | ACTIVE | SOIC | D | 8 | 2500 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-2-260C-1 YEAR | -55 to 125 | OPA 2349UA | Samples |
| OPA2349UAG4 | ACTIVE | SOIC | D | 8 | 75 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-2-260C-1 YEAR | -55 to 125 | OPA 2349UA | Samples |
| OPA349NA/250 | ACTIVE | SOT-23 | DBV | 5 | 250 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-2-260C-1 YEAR | 0 to 70 | A49 | Samples |
| OPA349NA/3K | ACTIVE | SOT-23 | DBV | 5 | 3000 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-2-260C-1 YEAR | | A49 | Samples |
| OPA349NA/3KG4 | ACTIVE | SOT-23 | DBV | 5 | 3000 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-2-260C-1 YEAR | | A49 | Samples |
| OPA349SA/250 | ACTIVE | SC70 | DCK | 5 | 250 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-1-260C-UNLIM | | S49 | Samples |
| OPA349SA/3K | ACTIVE | SC70 | DCK | 5 | 3000 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-1-260C-UNLIM | | S49 | Samples |
| OPA349SA/3KG4 | ACTIVE | SC70 | DCK | 5 | 3000 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-1-260C-UNLIM | | S49 | Samples |
| OPA349UA | ACTIVE | SOIC | D | 8 | 75 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-2-260C-1 YEAR | | OPA 349UA | Samples |
| OPA349UA/2K5 | ACTIVE | SOIC | D | 8 | 2500 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-2-260C-1 YEAR | -40 to 85 | OPA 349UA | Samples |
| OPA349UA/2K5G4 | ACTIVE | SOIC | D | 8 | 2500 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-2-260C-1 YEAR | -40 to 85 | OPA 349UA | Samples |
| OPA349UAG4 | ACTIVE | SOIC | D | 8 | 75 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-2-260C-1 YEAR | | OPA 349UA | Samples |

(1) The marketing status values are defined as follows:
**ACTIVE:** Product device recommended for new designs.

**LIFEBUY:** TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.
**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.
**PREVIEW:** Device has been announced but is not in production. Samples may or may not be available.
**OBSOLETE:** TI has discontinued the production of the device.

**(2) RoHS:** TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".
**RoHS Exempt:** TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.
**Green:** TI defines "Green" to mean the content of Chlorine (Cl) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of <=1000ppm threshold. Antimony trioxide based flame retardants must also meet the <=1000ppm threshold requirement.

**(3)** MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

**(4)** There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

**(5)** Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

**(6)** Lead/Ball Finish - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead/Ball Finish values may wrap to two lines if the finish value exceeds the maximum column width.

**Important Information and Disclaimer:**The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

## TAPE AND REEL INFORMATION

**REEL DIMENSIONS**




**TAPE DIMENSIONS**




| | |
|---|---|
| A0 | Dimension designed to accommodate the component width |
| B0 | Dimension designed to accommodate the component length |
| K0 | Dimension designed to accommodate the component thickness |
| W | Overall width of the carrier tape |
| P1 | Pitch between successive cavity centers |

**QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE**

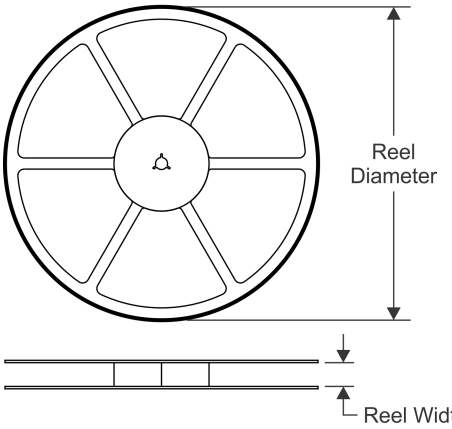


*All dimensions are nominal
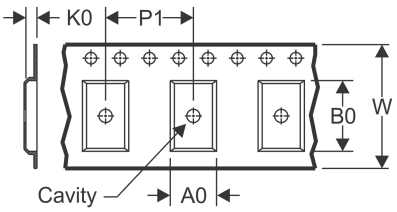
| Device | Package Type | Package Drawing | Pins | SPQ | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| OPA2349UA/2K5 | SOIC | D | 8 | 2500 | 330.0 | 12.4 | 6.4 | 5.2 | 2.1 | 8.0 | 12.0 | Q1 |
| OPA349NA/250 | SOT-23 | DBV | 5 | 250 | 178.0 | 8.4 | 3.3 | 3.2 | 1.4 | 4.0 | 8.0 | Q3 |
| OPA349NA/3K | SOT-23 | DBV | 5 | 3000 | 178.0 | 8.4 | 3.23 | 3.17 | 1.37 | 4.0 | 8.0 | Q3 |
| OPA349SA/250 | SC70 | DCK | 5 | 250 | 178.0 | 9.0 | 2.4 | 2.5 | 1.2 | 4.0 | 8.0 | Q3 |
| OPA349SA/3K | SC70 | DCK | 5 | 3000 | 178.0 | 9.0 | 2.4 | 2.5 | 1.2 | 4.0 | 8.0 | Q3 |
| OPA349UA/2K5 | SOIC | D | 8 | 2500 | 330.0 | 12.4 | 6.4 | 5.2 | 2.1 | 8.0 | 12.0 | Q1 |

TAPE AND REEL BOX DIMENSIONS

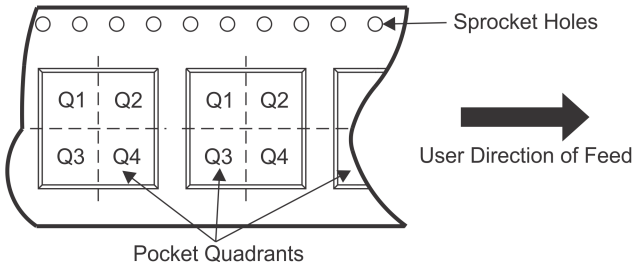


*All dimensions are nominal

| Device | Package Type | Package Drawing | Pins | SPQ | Length (mm) | Width (mm) | Height (mm) |
|---|---|---|---|---|---|---|---|
| OPA2349UA/2K5 | SOIC | D | 8 | 2500 | 367.0 | 367.0 | 35.0 |
| OPA349NA/250 | SOT-23 | DBV | 5 | 250 | 445.0 | 220.0 | 345.0 |
| OPA349NA/3K | SOT-23 | DBV | 5 | 3000 | 445.0 | 220.0 | 345.0 |
| OPA349SA/250 | SC70 | DCK | 5 | 250 | 180.0 | 180.0 | 18.0 |
| OPA349SA/3K | SC70 | DCK | 5 | 3000 | 180.0 | 180.0 | 18.0 |
| OPA349UA/2K5 | SOIC | D | 8 | 2500 | 367.0 | 367.0 | 35.0 |

## DCK (R–PDSO–G5) PLASTIC SMALL–OUTLINE PACKAGE

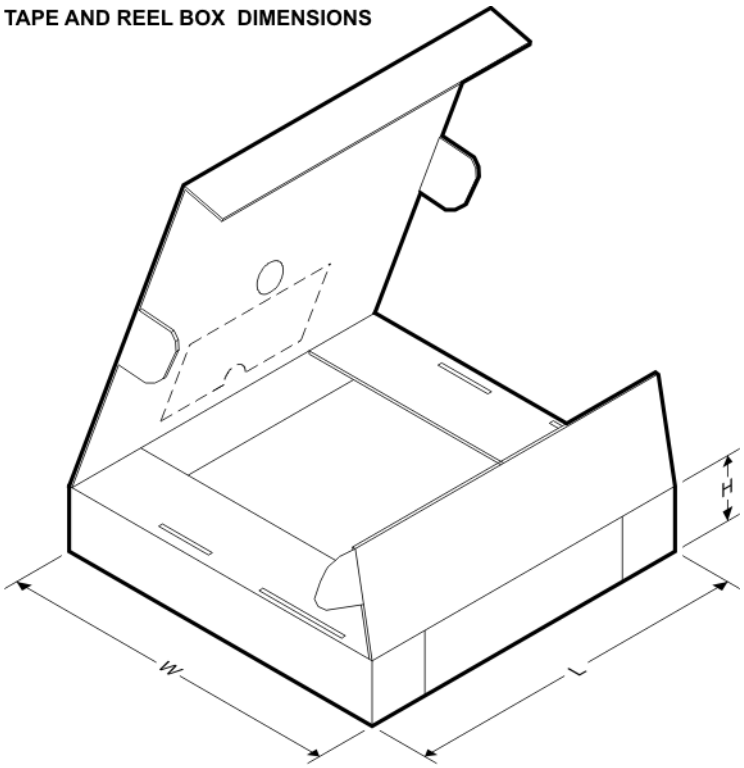


4093553–3/G 01/2007

NOTES:
A. All linear dimensions are in millimeters.
B. This drawing is subject to change without notice.
C. Body dimensions do not include mold flash or protrusion. Mold flash and protrusion shall not exceed 0.15 per side.
D. Falls within JEDEC MO–203 variation AA.

DCK (R–PDSO–G5) PLASTIC SMALL OUTLINE

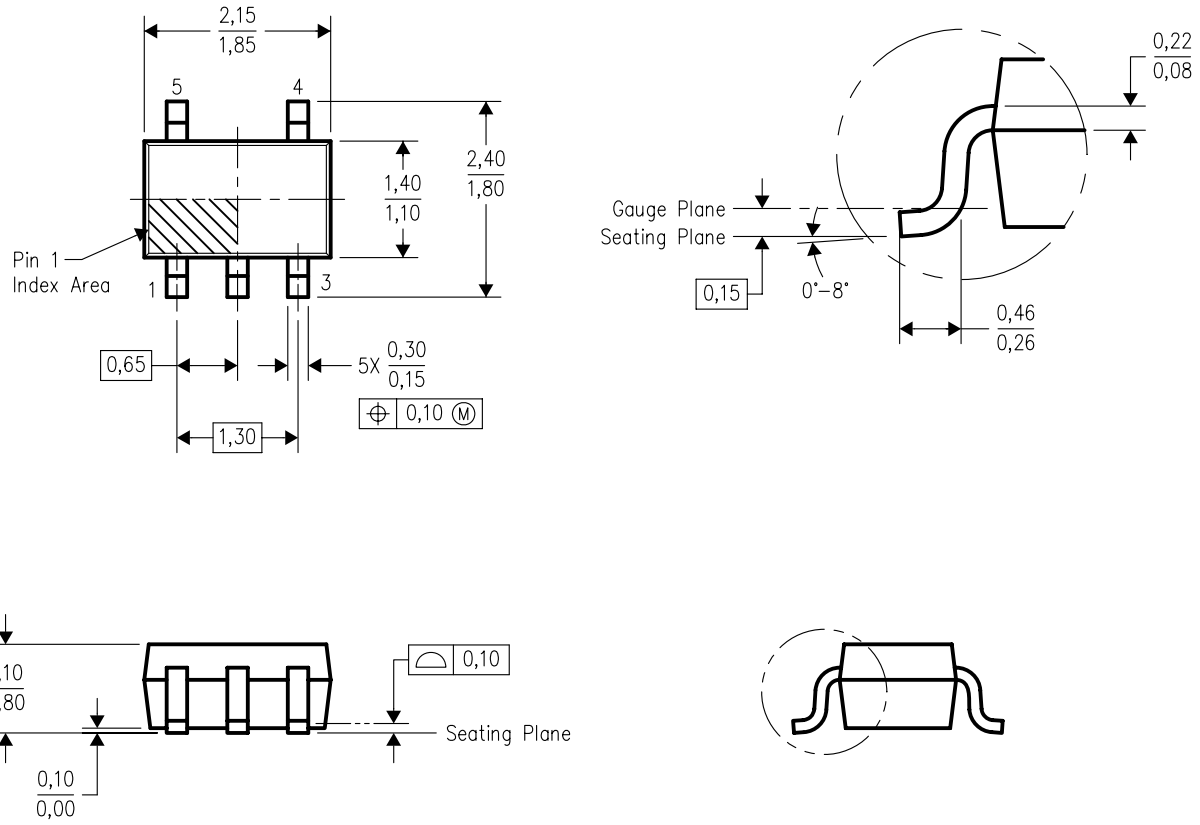


NOTES:
A. All linear dimensions are in millimeters.
B. This drawing is subject to change without notice.
C. Customers should place a note on the circuit board fabrication drawing not to alter the center solder mask defined pad.
D. Publication IPC–7351 is recommended for alternate designs.
E. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Example stencil design based on a 50% volumetric metal load solder paste. Refer to IPC–7525 for other stencil recommendations.

DCN (R–PDSO–G8) PLASTIC SMALL–OUTLINE PACKAGE (DIE DOWN)




NOTES:
A. All linear dimensions are in millimeters.
B. This drawing is subject to change without notice.
C. Package outline exclusive of metal burr & dambar protrusion/intrusion.
D. Package outline inclusive of solder plating.
E. A visual index feature must be located within the Pin 1 index area.
F. Falls within JEDEC MO–178 Variation BA.
G. Body dimensions do not include flash or protrusion. Mold flash and protrusion shall not exceed 0.25 per side.

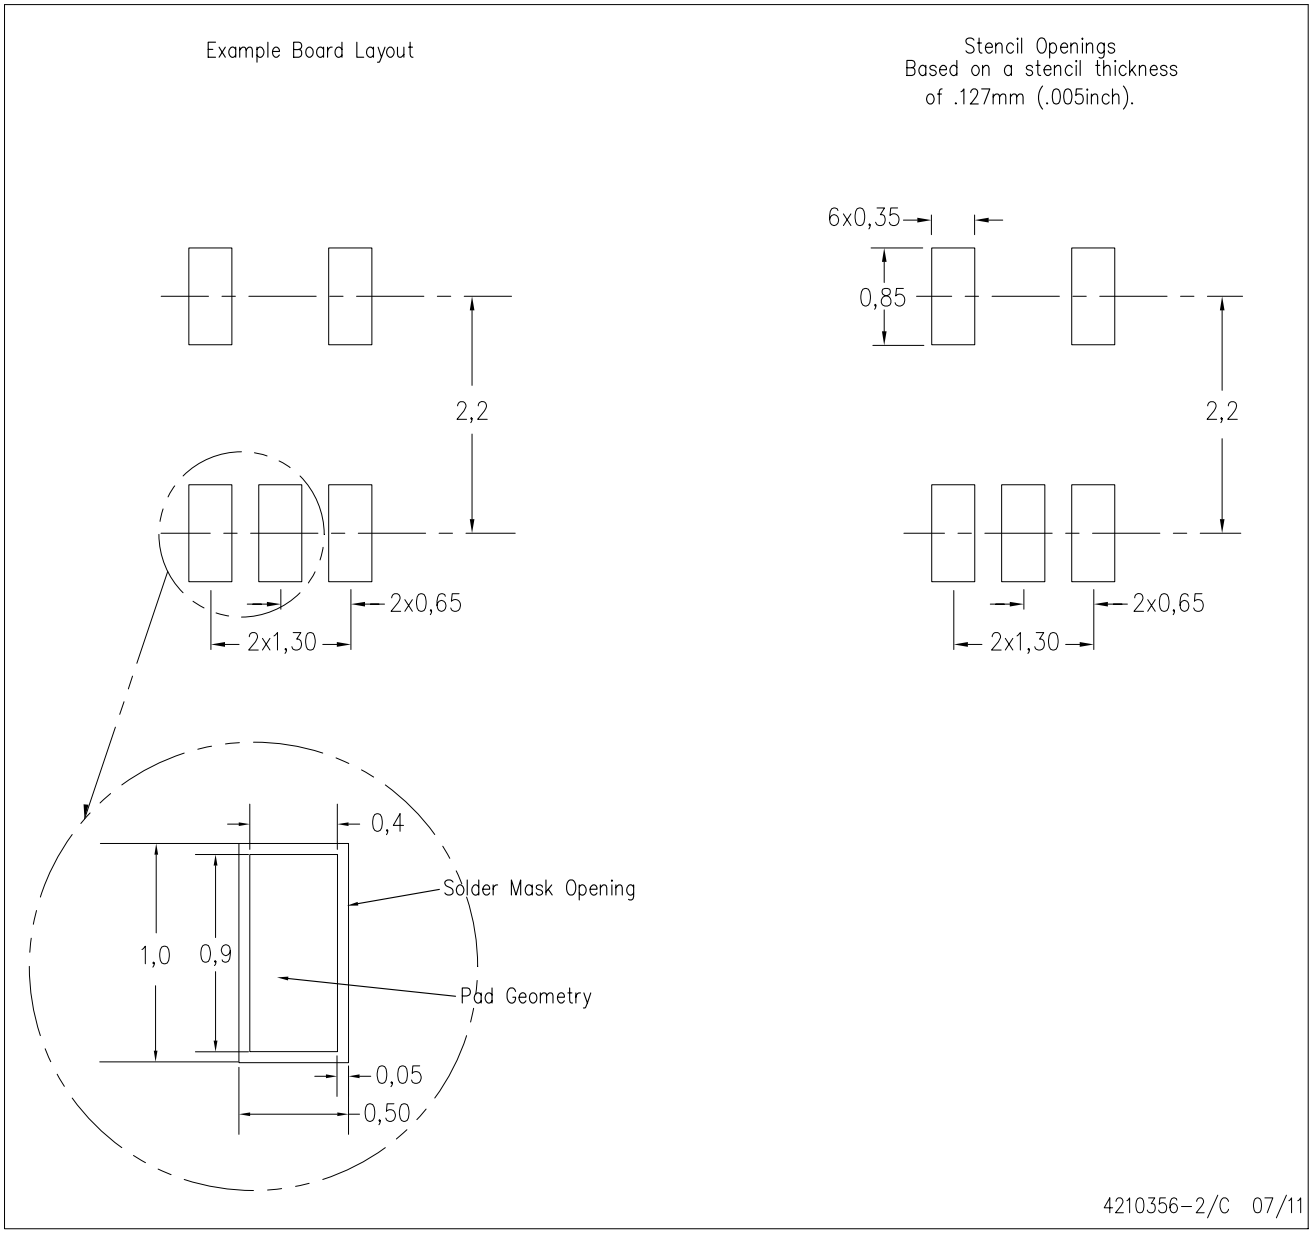DCN (R–PDSO–G8) PLASTIC SMALL–OUTLINE PACKAGE (DIE DOWN)




NOTES:
A. All linear dimensions are in millimeters.
B. This drawing is subject to change without notice.
C. Publication IPC–7351 is recommended for alternate designs.
D. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC–7525.
E. Customers should contact their board fabrication site for solder mask tolerances between and around signal pads.

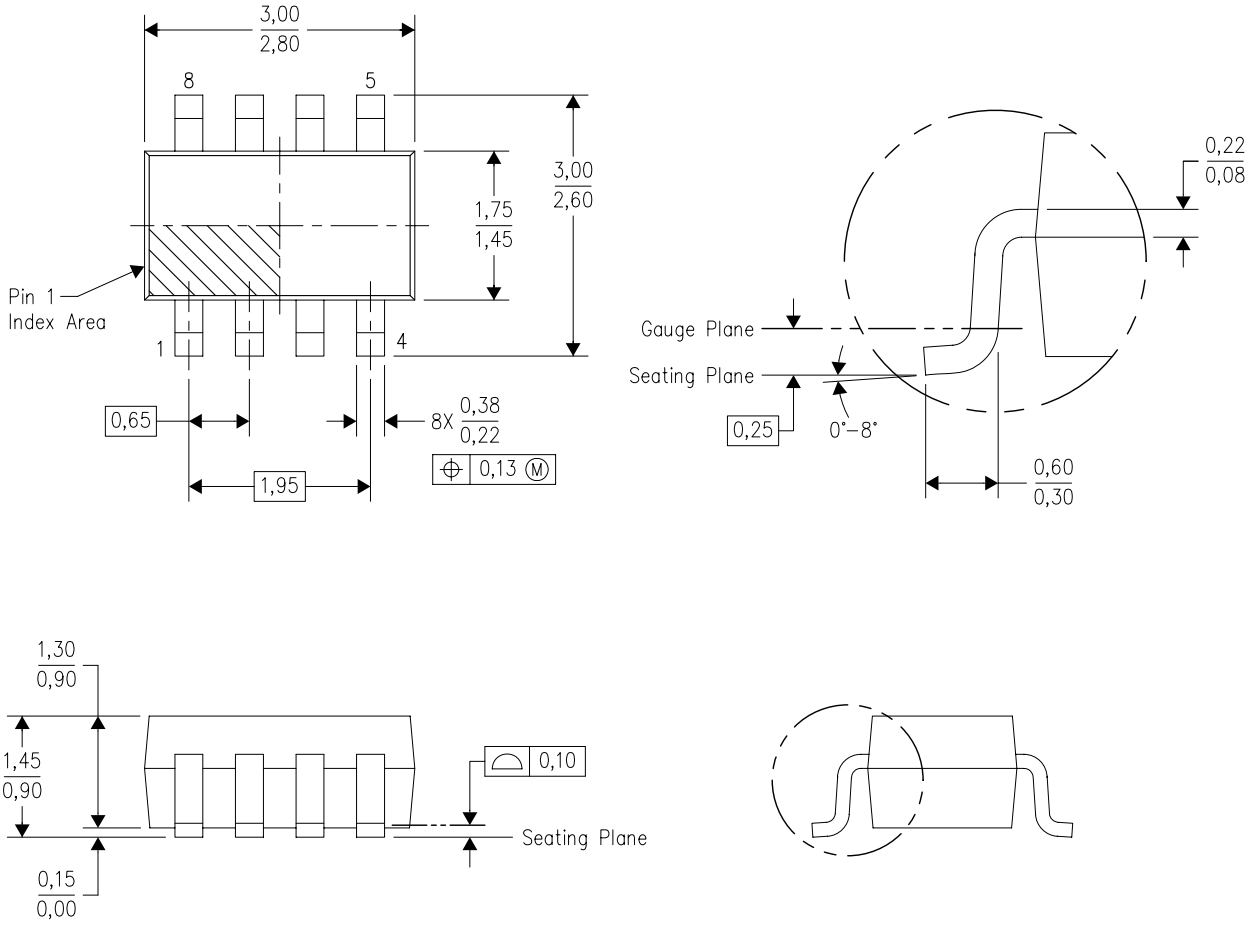

# PACKAGE OUTLINE

## D0008A

## SOIC - 1.75 mm max height

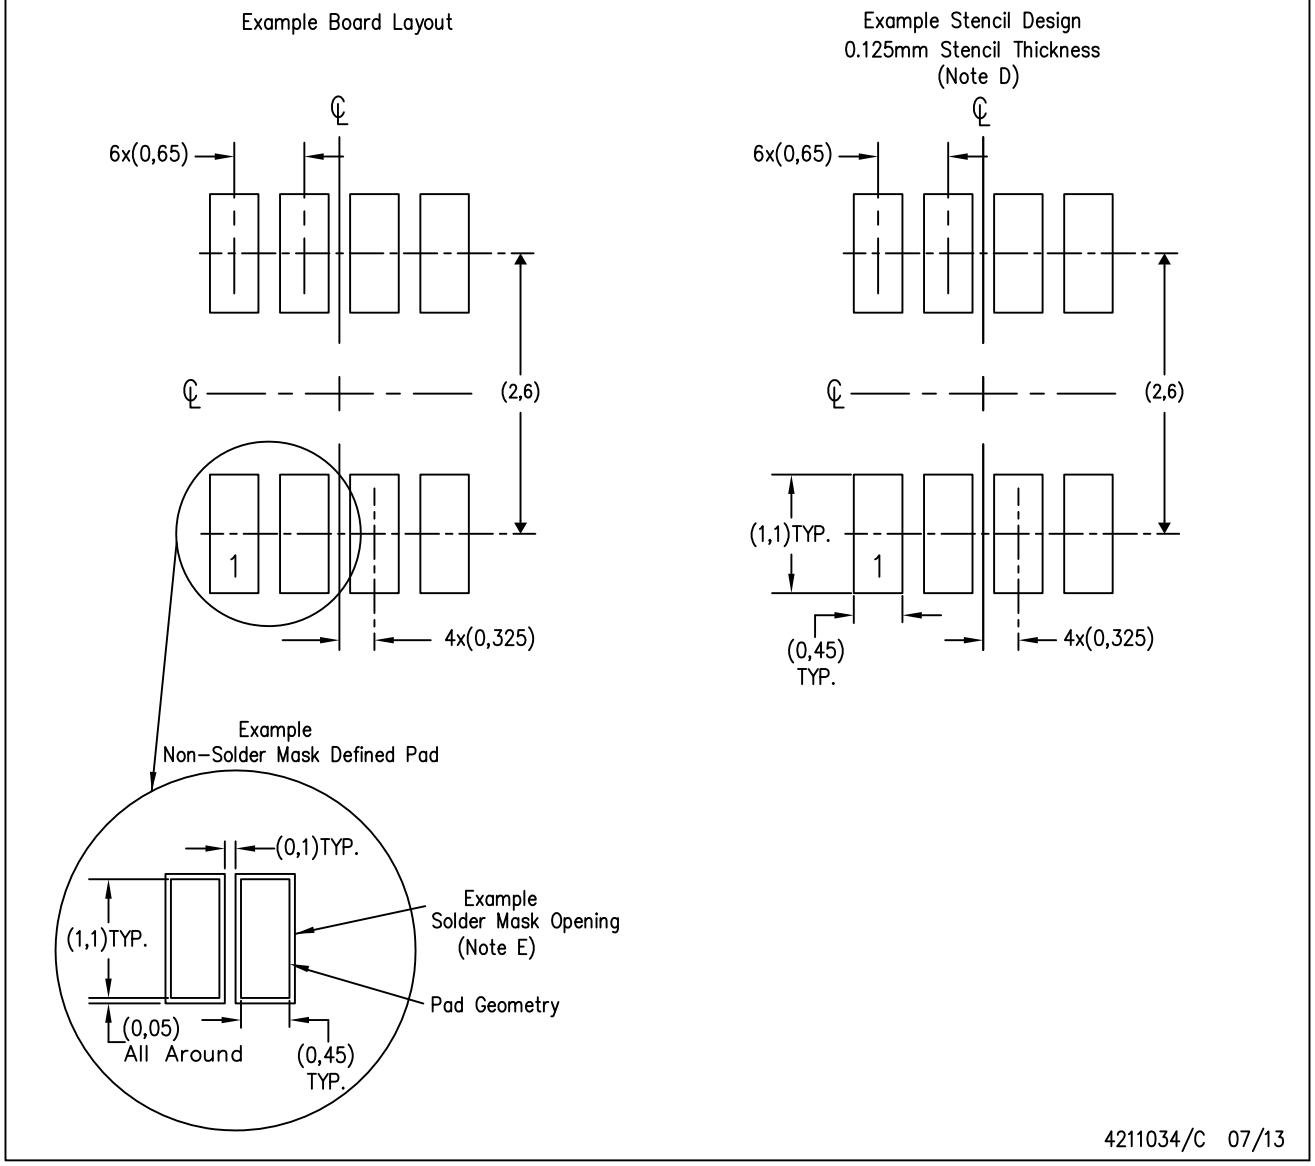SMALL OUTLINE INTEGRATED CIRCUIT




NOTES:

1. Linear dimensions are in inches [millimeters]. Dimensions in parenthesis are for reference only. Controlling dimensions are in inches. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed .006 [0.15] per side.
4. This dimension does not include interlead flash.
5. Reference JEDEC registration MS-012, variation AA.




LAND PATTERN EXAMPLE
EXPOSED METAL SHOWN
SCALE:8X

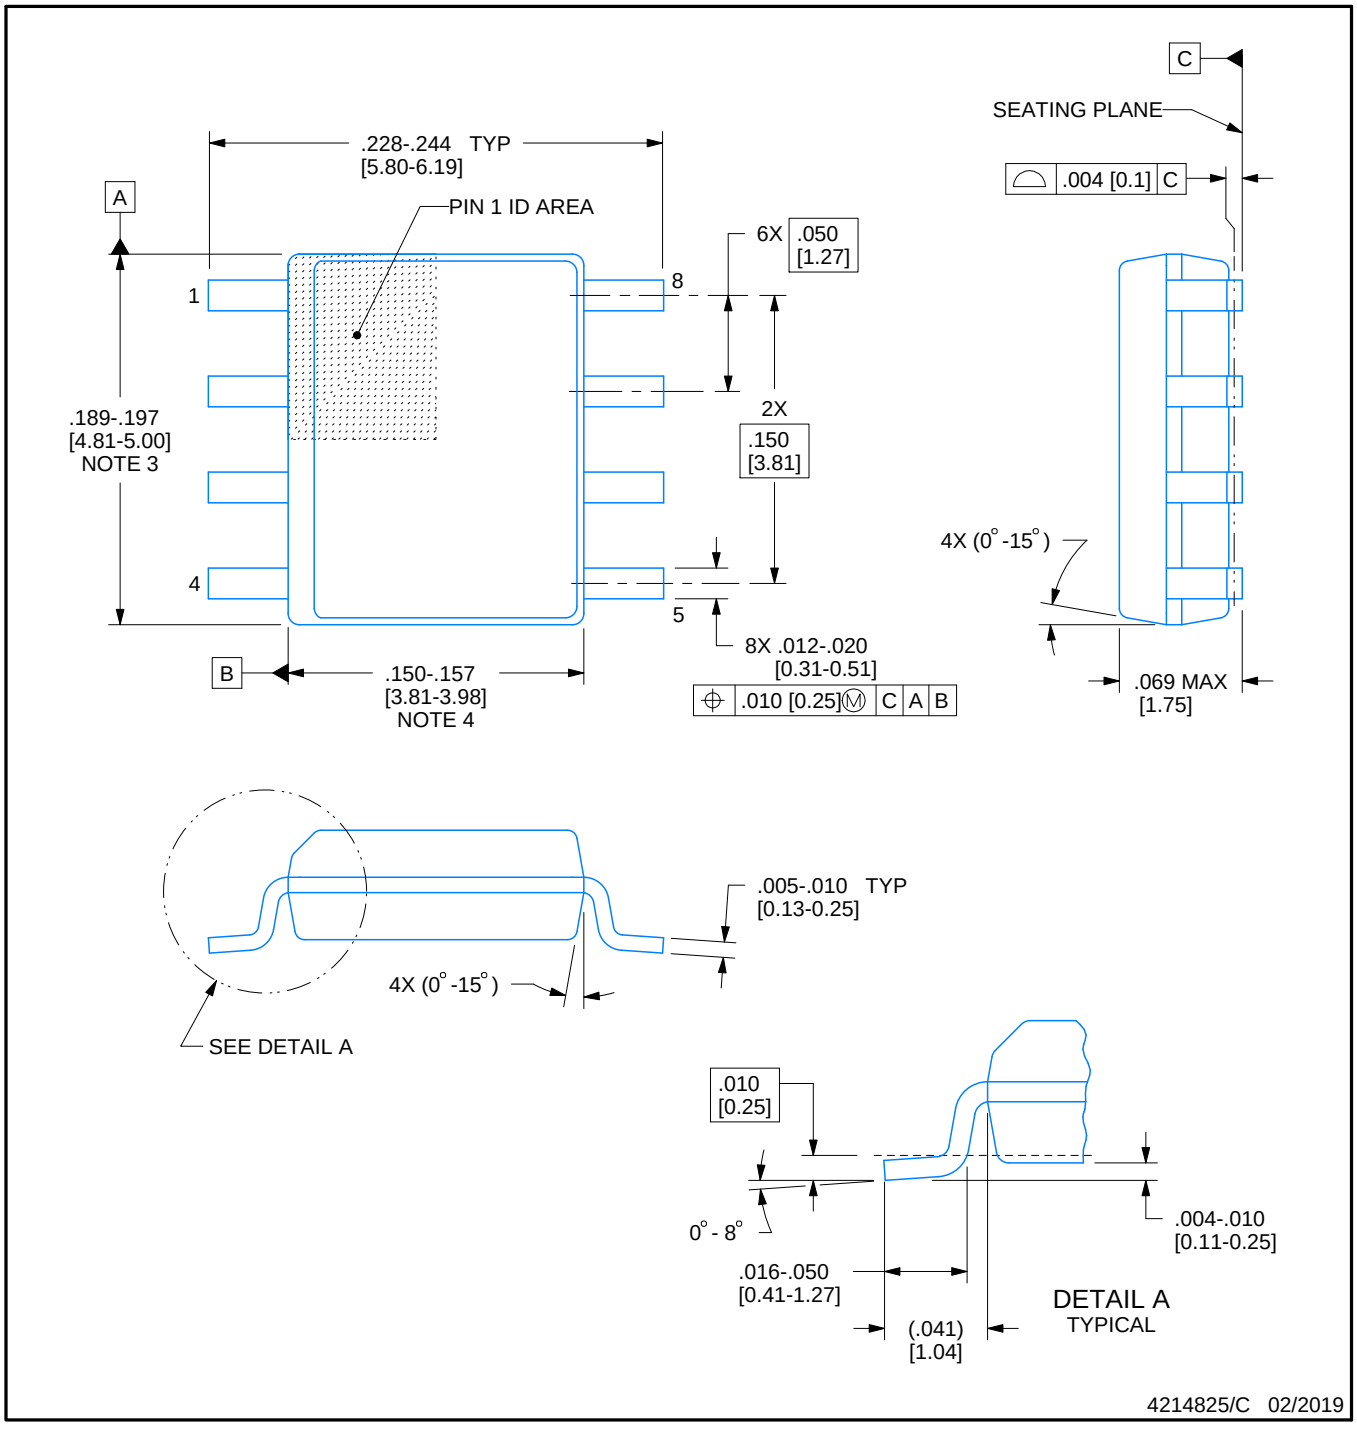


SOLDER MASK DETAILS

4214825/C 02/2019

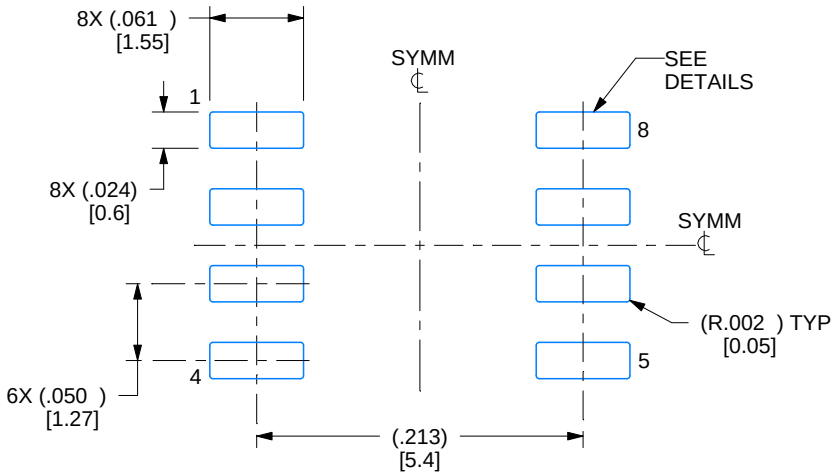NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.
7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.
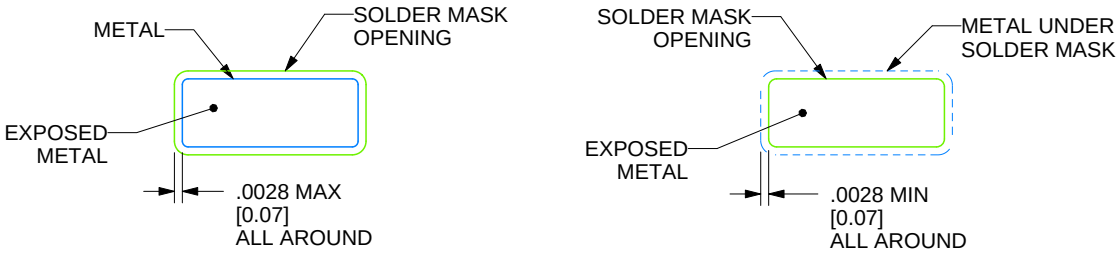
# EXAMPLE STENCIL DESIGN

## D0008A

## SOIC - 1.75 mm max height

SMALL OUTLINE INTEGRATED CIRCUIT




SOLDER PASTE EXAMPLE
BASED ON .005 INCH [0.125 MM] THICK STENCIL
SCALE:8X

4214825/C 02/2019

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.
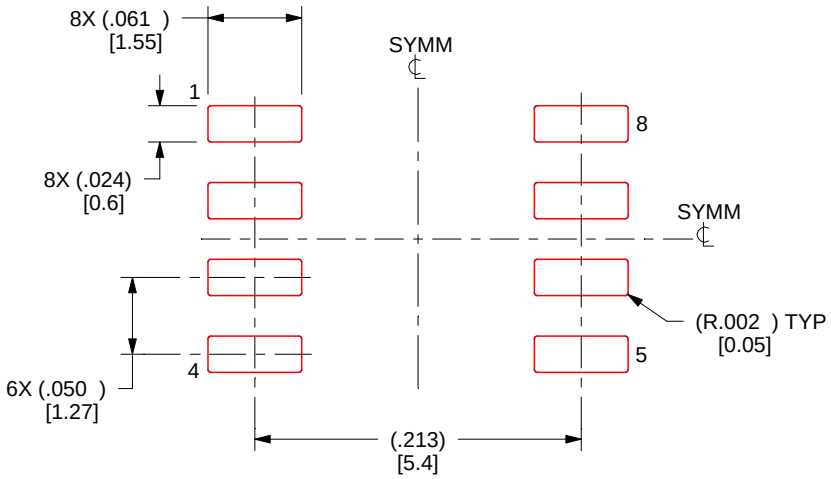
# PACKAGE OUTLINE

## DBV0005A

## SOT-23 - 1.45 mm max height

SMALL OUTLINE TRANSISTOR




4214839/D 11/2018

NOTES:

1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. Refernce JEDEC MO-178.
4. Body dimensions do not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm per side.

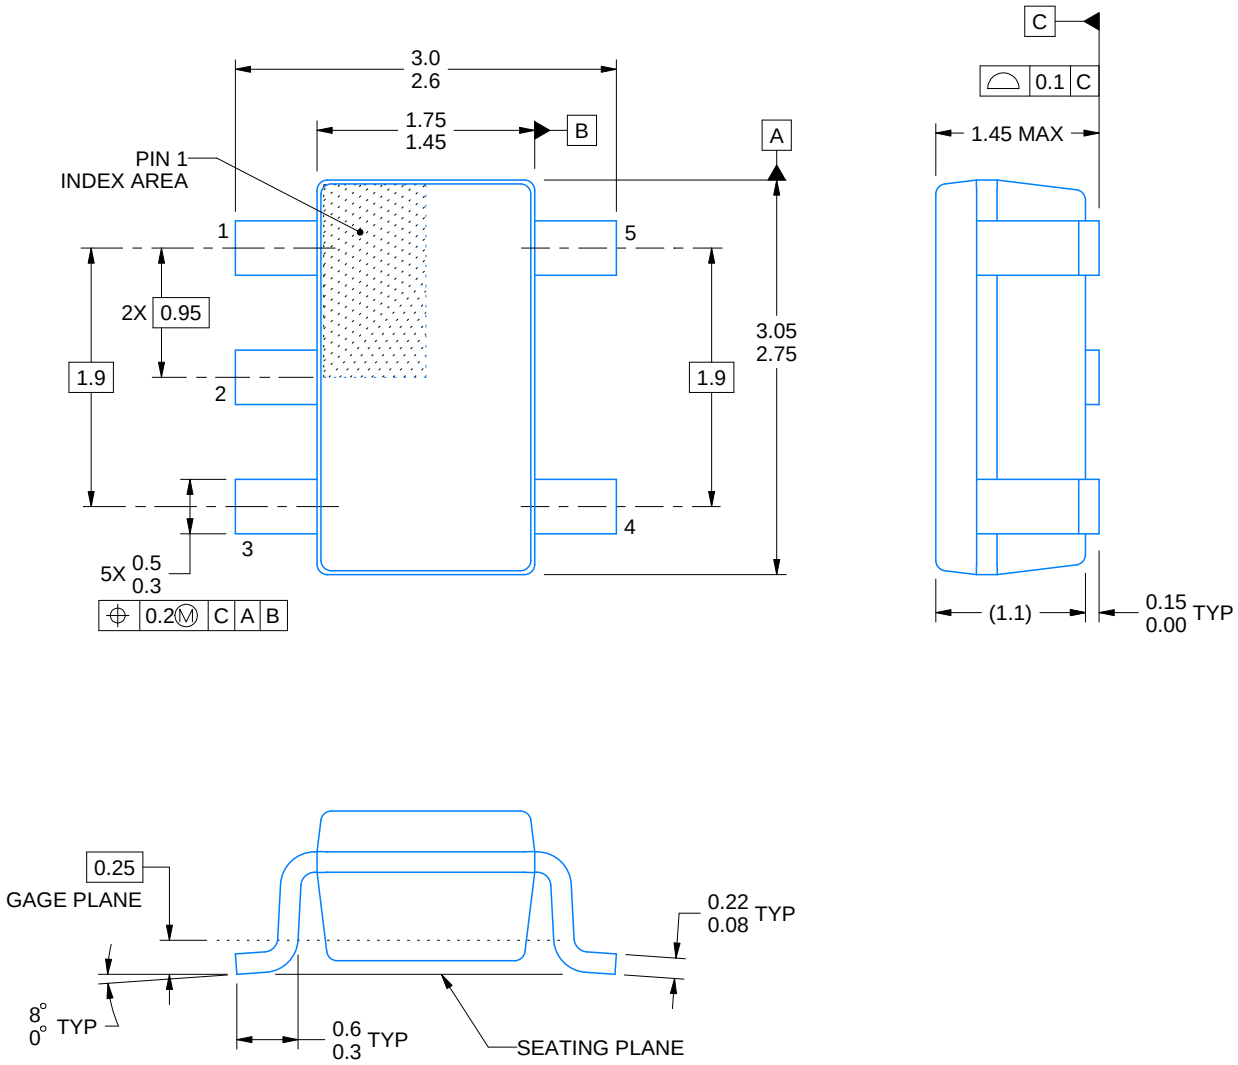


LAND PATTERN EXAMPLE
EXPOSED METAL SHOWN
SCALE:15X




SOLDER MASK DETAILS

4214839/D 11/2018

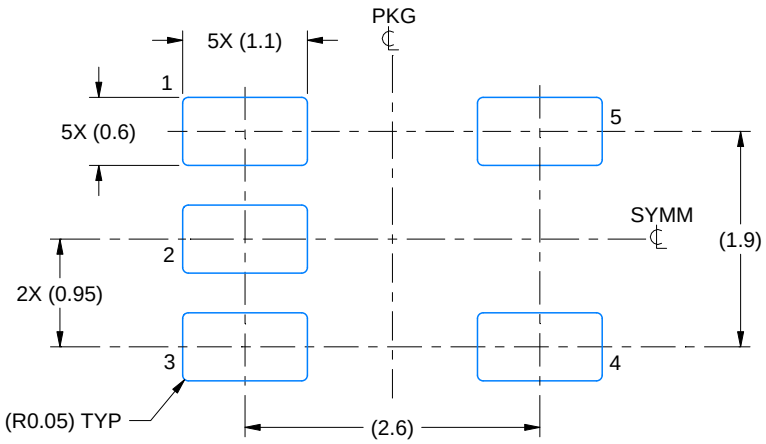NOTES: (continued)

5. Publication IPC-7351 may have alternate designs.
6. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

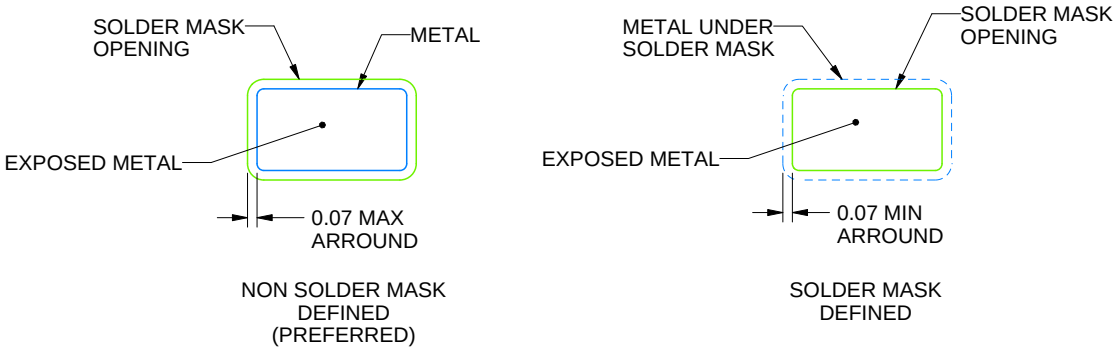


SOLDER PASTE EXAMPLE
BASED ON 0.125 mm THICK STENCIL
SCALE:15X

4214839/D 11/2018

NOTES: (continued)

7. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
8. Board assembly site may have different recommendations for stencil design.
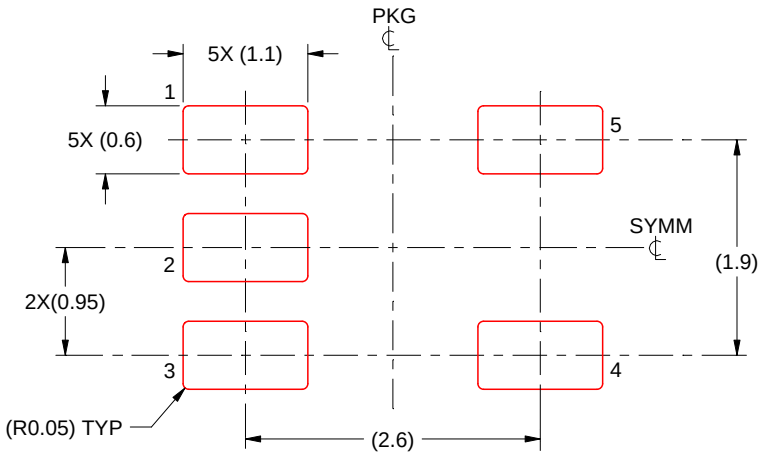
## IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES “AS IS” AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements. These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI’s products are provided subject to TI’s Terms of Sale (www.ti.com/legal/termsofsale.html) or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI’s provision of these resources does not expand or otherwise alter TI’s applicable warranties or warranty disclaimers for TI products.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2019, Texas Instruments Incorporated

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- View OPA349SA/3KG4 on WIN SOURCE
- Texas Instruments Information

## Optimize Your Supply Chain with WIN SOURCE Solutions

- Global Sourcing Solution
- Obsolete Management
- Cost Control Management
- Shortage Management
- Alternative Solution
- Excess Inventory Management