


# Product Configuration System

## Through-Hole Crystals (AT Strip Crystal)

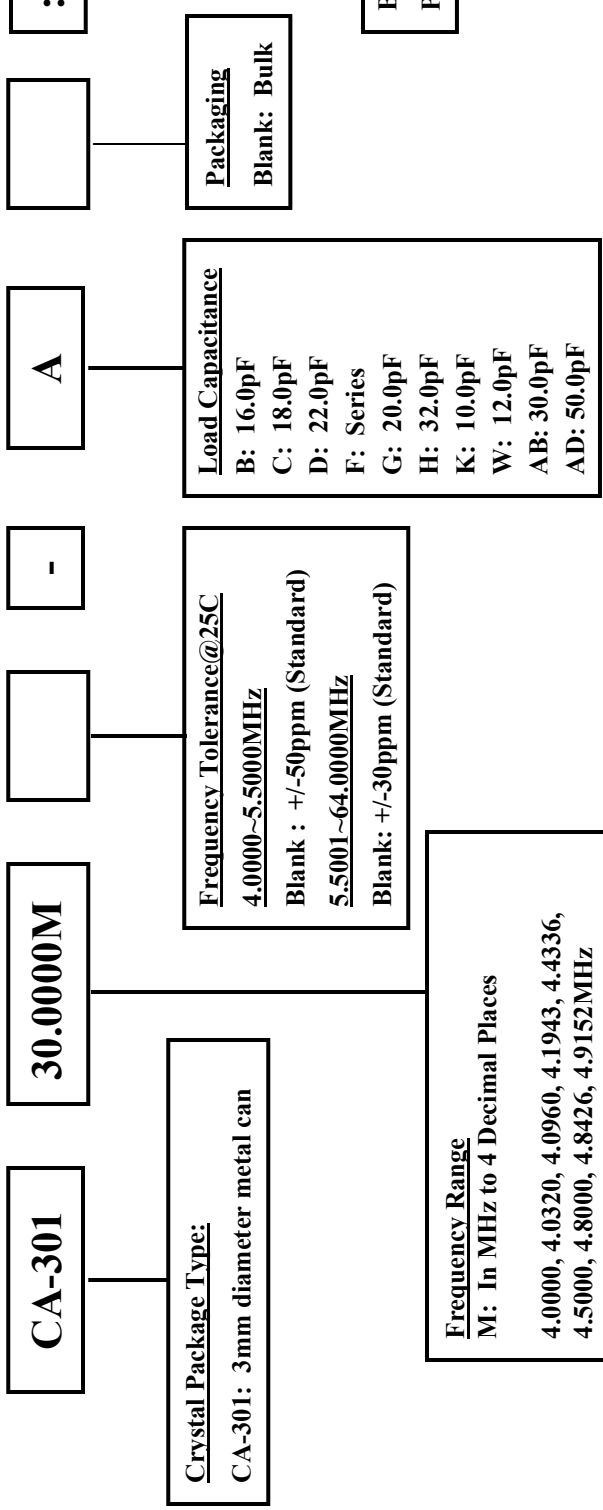

**NOTES:**

- 1) For frequencies between 26.0000MHz and 26.0001MHz please specify if 3<sup>rd</sup> Overtone is required.
- 2) If you require a load capacitance other than the standard please contact your EEA representative for more information.

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- [⊖ View R3441 on WIN SOURCE](#)
- [⊖ Epson Electronics America Inc-Semiconductor Div Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management