



# THE DATASHEET OF STB14NM50N



## N-channel 500 V, 0.28 $\Omega$ typ., 12 A MDmesh™ II Power MOSFET in a D<sup>2</sup>PAK package

Datasheet - production data


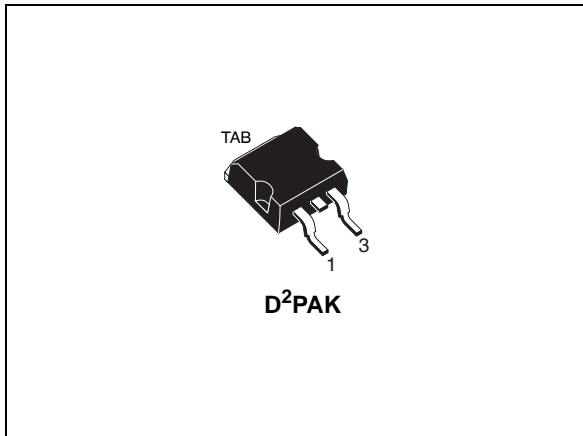


Figure 1. Internal schematic diagram

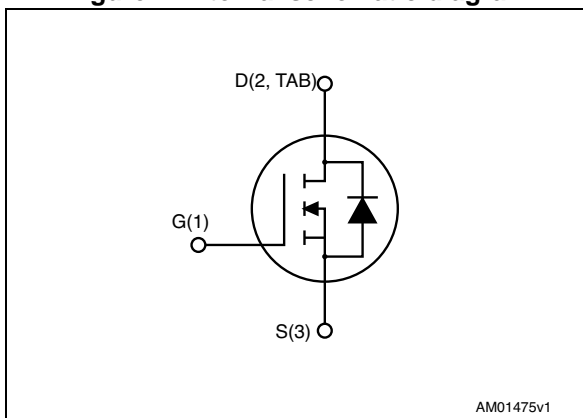

### Features

| Order code | V <sub>DS</sub> @ T <sub>Jmax</sub> | R <sub>DS(on)</sub> max | I <sub>D</sub> |
|------------|-------------------------------------|-------------------------|----------------|
| STB14NM50N | 550 V                               | 0.32 $\Omega$           | 12 A           |

- 100% avalanche tested
- Low input capacitance and gate charge
- Low gate input resistance

### Applications

- Switching applications

### Description

This device is an N-channel Power MOSFET developed using the second generation of MDmesh™ technology. This revolutionary Power MOSFET associates a vertical structure to the company's strip layout to yield one of the world's lowest on-resistance and gate charge. It is therefore suitable for the most demanding high efficiency converters.

Table 1. Device summary

| Order code | Marking | Package            | Packaging     |
|------------|---------|--------------------|---------------|
| STB14NM50N | 14NM50N | D <sup>2</sup> PAK | Tape and reel |

## Contents

|          |   |           |
|----------|---|-----------|
| <b>1</b> | <b>Electrical ratings</b> .....               | <b>3</b>  |
| <b>2</b> | <b>Electrical characteristics</b> .....       | <b>4</b>  |
|          | 2.1 Electrical characteristics (curves) ..... | 6         |
| <b>3</b> | <b>Test circuits</b> .....                    | <b>8</b>  |
| <b>4</b> | <b>Package mechanical data</b> .....          | <b>9</b>  |
| <b>5</b> | <b>Packaging mechanical data</b> .....        | <b>12</b> |
| <b>6</b> | <b>Revision history</b> .....                 | <b>14</b> |

# 1 Electrical ratings

**Table 2. Absolute maximum ratings**

| Symbol         | Parameter   | Value       | Unit             |
|----------------|---|-------------|------------------|
| $V_{DS}$       | Drain-source voltage  | 500         | V                |
| $V_{GS}$       | Gate-source voltage   | $\pm 25$    | V                |
| $I_D$          | Drain current (continuous) at $T_C = 25\text{ }^\circ\text{C}$  | 12          | A                |
| $I_D$          | Drain current (continuous) at $T_C = 100\text{ }^\circ\text{C}$ | 8           | A                |
| $I_{DM}^{(1)}$ | Drain current (pulsed)  | 48          | A                |
| $P_{TOT}$      | Total dissipation at $T_C = 25\text{ }^\circ\text{C}$           | 90          | W                |
| $dv/dt^{(2)}$  | Peak diode recovery voltage slope                               | 15          | V/ns             |
| $T_{stg}$      | Storage temperature   | - 55 to 150 | $^\circ\text{C}$ |
| $T_j$          | Max. operating junction temperature                             | 150         | $^\circ\text{C}$ |

1. Pulse width limited by safe operating area.
2.  $I_{SD} \leq 12\text{ A}$ ,  $di/dt \leq 400\text{ A/s}$ ,  $V_{DS\text{ peak}} \leq V_{(BR)DSS}$ ,  $V_{DD} = 80\% V_{(BR)DSS}$ .

**Table 3. Thermal data**

| Symbol              | Parameter                            | Value | Unit               |
|---------------------|--------------------------------------|-------|--------------------|
| $R_{thj-case}$      | Thermal resistance junction-case max | 1.39  | $^\circ\text{C/W}$ |
| $R_{thj-pcb}^{(1)}$ | Thermal resistance junction-pcb max  | 30    | $^\circ\text{C/W}$ |

1. When mounted on 1inch<sup>2</sup> FR-4 board, 2 oz Cu.

**Table 4. Avalanche data**

| Symbol   | Parameter  | Value | Unit |
|----------|--|-------|------|
| $I_{AR}$ | Avalanche current, repetitive or not-repetitive (pulse width limited by $T_j$ max)                                   | 4     | A    |
| $E_{AS}$ | Single pulse avalanche energy (starting $T_j = 25\text{ }^\circ\text{C}$ , $I_D = I_{AR}$ , $V_{DD} = 50\text{ V}$ ) | 172   | mJ   |

## 2 Electrical characteristics

( $T_C = 25\text{ °C}$  unless otherwise specified)

**Table 5. On /off states**

| Symbol        | Parameter                         | Test conditions  | Min. | Typ. | Max.      | Unit          |
|---------------|-----------------------------------|--|------|------|-----------|---------------|
| $V_{(BR)DSS}$ | Drain-source breakdown voltage    | $V_{GS} = 0, I_D = 1\text{ mA}$                          | 500  |      |           | V             |
| $I_{DSS}$     | Zero gate voltage drain current   | $V_{GS} = 0, V_{DS} = 500\text{ V}$                      |      |      | 1         | $\mu\text{A}$ |
|               |                                   | $V_{GS} = 0, V_{DS} = 500\text{ V}, T_C = 125\text{ °C}$ |      |      | 100       | $\mu\text{A}$ |
| $I_{GSS}$     | Gate-body leakage current         | $V_{DS} = 0, V_{GS} = \pm 25\text{ V}$                   |      |      | $\pm 100$ | nA            |
| $V_{GS(th)}$  | Gate threshold voltage            | $V_{DS} = V_{GS}, I_D = 250\text{ }\mu\text{A}$          | 2    | 3    | 4         | V             |
| $R_{DS(on)}$  | Static drain-source on-resistance | $V_{GS} = 10\text{ V}, I_D = 6\text{ A}$                 |      | 0.28 | 0.32      | $\Omega$      |

**Table 6. Dynamic**

| Symbol                     | Parameter                     | Test conditions   | Min. | Typ. | Max. | Unit     |
|----------------------------|-------------------------------|---|------|------|------|----------|
| $C_{iss}$                  | Input capacitance             | $V_{GS} = 0, V_{DS} = 50\text{ V}, f = 1\text{ MHz}$  | -    | 816  | -    | pF       |
| $C_{oss}$                  | Output capacitance            |   | -    | 60   | -    | pF       |
| $C_{rss}$                  | Reverse transfer capacitance  |   | -    | 3    | -    | pF       |
| $C_{oss\text{ eq.}}^{(1)}$ | Equivalent output capacitance | $V_{GS} = 0, V_{DS} = 0\text{ to }50\text{ V}$  | -    | 157  | -    | pF       |
| $R_G$                      | Intrinsic gate resistance     | $f = 1\text{ MHz open drain}$   | -    | 4.5  | -    | $\Omega$ |
| $Q_g$                      | Total gate charge             | $V_{DD} = 400\text{ V}, I_D = 12\text{ A}, V_{GS} = 10\text{ V}$ (see <a href="#">Figure 13</a> ) | -    | 27   | -    | nC       |
| $Q_{gs}$                   | Gate-source charge            |   | -    | 5    | -    | nC       |
| $Q_{gd}$                   | Gate-drain charge             |   | -    | 15   | -    | nC       |

1.  $C_{oss\text{ eq.}}$  is defined as a constant equivalent capacitance giving the same charging time as  $C_{oss}$  when  $V_{DS}$  increases from 0 to 80%  $V_{DS}$

Table 7. Switching times







| Symbol       | Parameter           | Test conditions   | Min. | Typ. | Max. | Unit |
|--------------|---------------------|---|------|------|------|------|
| $t_{d(on)}$  | Turn-on delay time  | $V_{DD} = 400\text{ V}$ , $I_D = 12\text{ A}$ ,<br>$R_G = 4.7\ \Omega$ , $V_{GS} = 10\text{ V}$<br>(see <a href="#">Figure 13</a> ) | -    | 12   | -    | ns   |
| $t_r$        | Rise time           |   | -    | 16   | -    | ns   |
| $t_{d(off)}$ | Turn-off-delay time |   | -    | 42   | -    | ns   |
| $t_f$        | Fall time           |   | -    | 22   | -    | ns   |






Table 8. Source drain diode

| Symbol          | Parameter                     | Test conditions   | Min. | Typ. | Max. | Unit          |
|-----------------|-------------------------------|---|------|------|------|---------------|
| $I_{SD}$        | Source-drain current          |   | -    |      | 12   | A             |
| $I_{SDM}^{(1)}$ | Source-drain current (pulsed) |   | -    |      | 48   | A             |
| $V_{SD}^{(2)}$  | Forward on voltage            | $V_{GS} = 0$ , $I_{SD} = 12\text{ A}$   | -    |      | 1.6  | V             |
| $t_{rr}$        | Reverse recovery time         | $I_{SD} = 12\text{ A}$ , $di/dt = 100\text{ A}/\mu\text{s}$ ,<br>$V_{DD} = 60\text{ V}$<br>(see <a href="#">Figure 17</a> )                                     | -    | 252  |      | ns            |
| $Q_{rr}$        | Reverse recovery charge       |   | -    | 2.8  |      | $\mu\text{C}$ |
| $I_{RRM}$       | Reverse recovery current      |   | -    | 22   |      | A             |
| $t_{rr}$        | Reverse recovery time         | $I_{SD} = 12\text{ A}$ , $di/dt = 100\text{ A}/\mu\text{s}$ ,<br>$V_{DD} = 60\text{ V}$ , $T_J = 150\text{ }^\circ\text{C}$<br>(see <a href="#">Figure 17</a> ) | -    | 300  |      | ns            |
| $Q_{rr}$        | Reverse recovery charge       |   | -    | 3.3  |      | $\mu\text{C}$ |
| $I_{RRM}$       | Reverse recovery current      |   | -    | 22.2 |      | A             |







1. Pulse width limited by safe operating area
2. Pulsed: pulse duration = 300  $\mu\text{s}$ , duty cycle 1.5%

## 2.1 Electrical characteristics (curves)

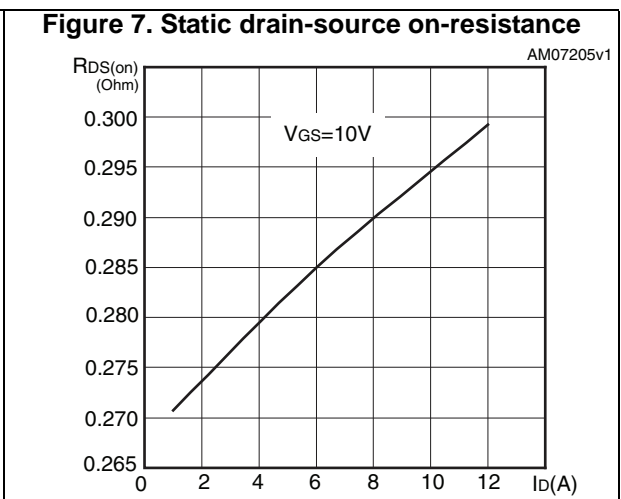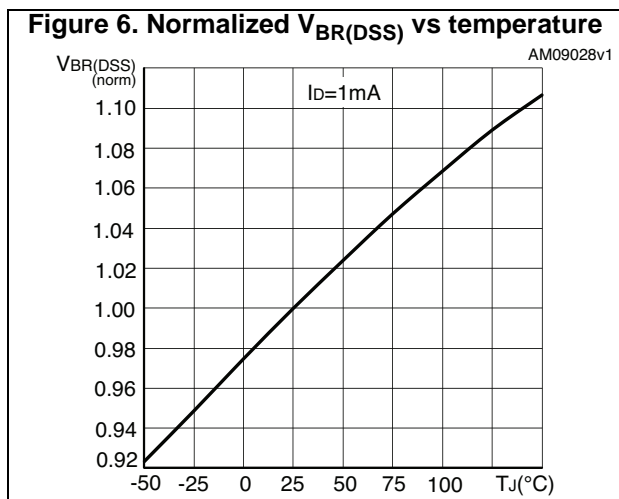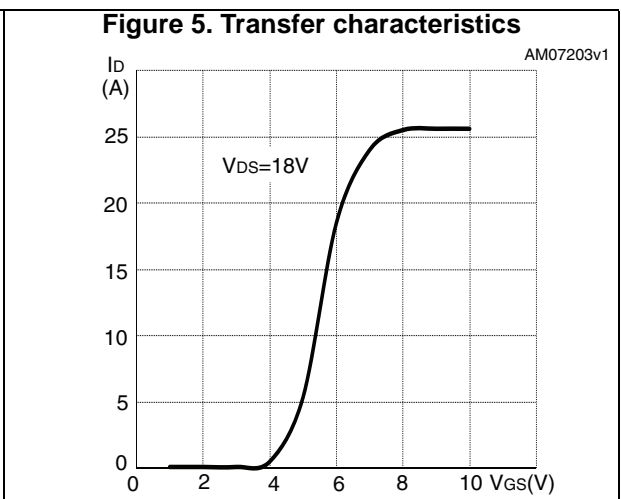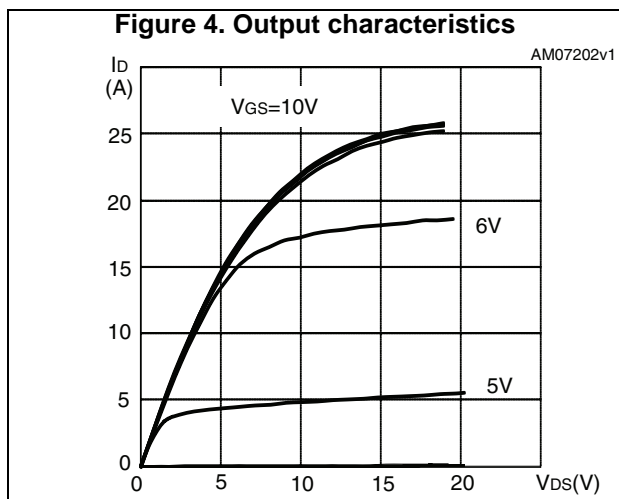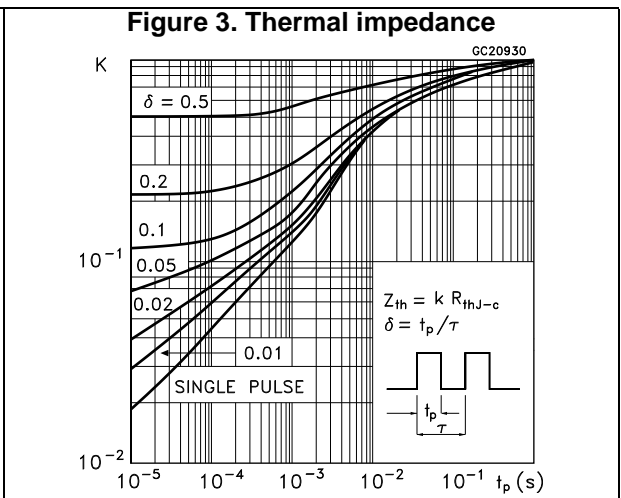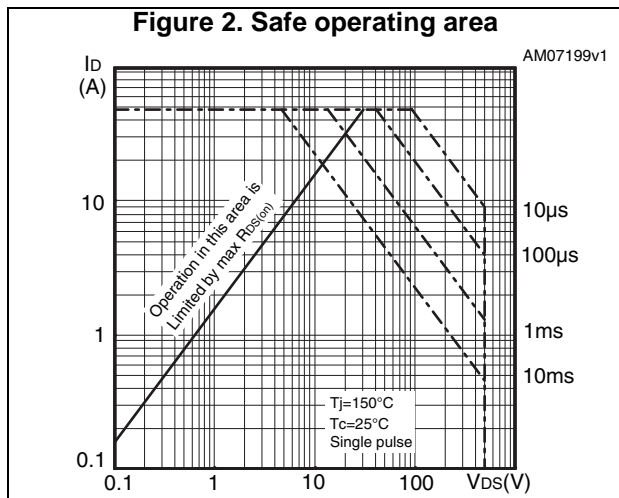

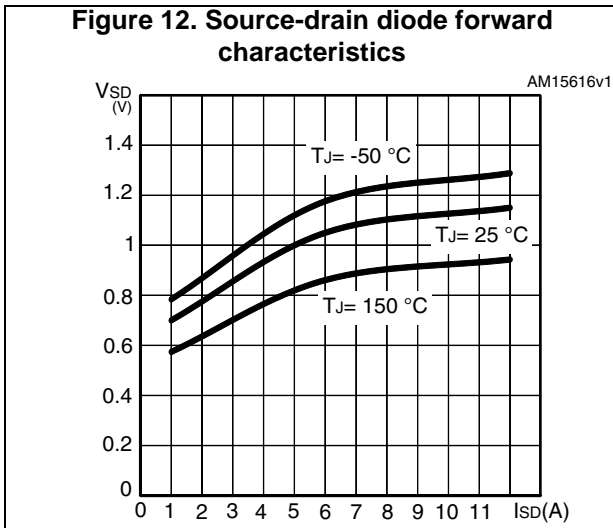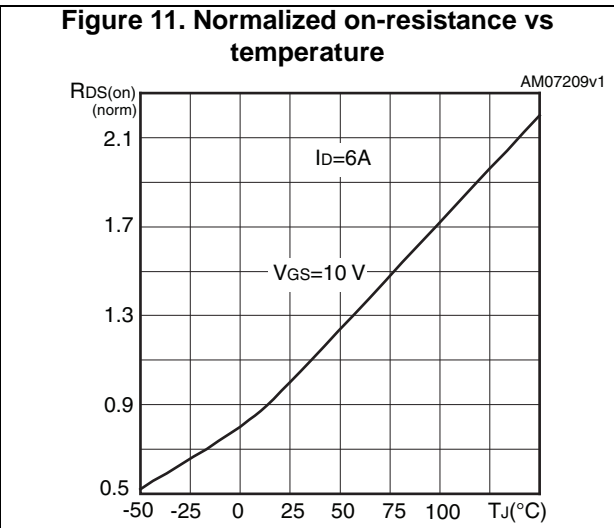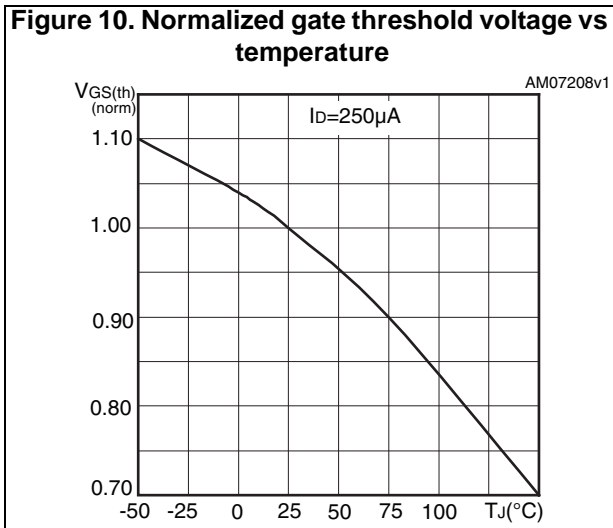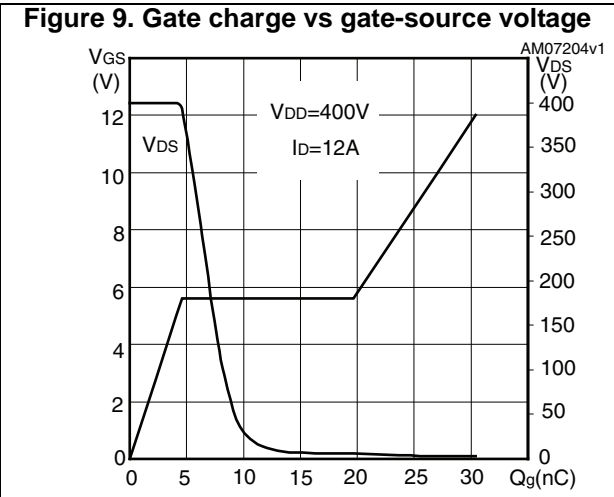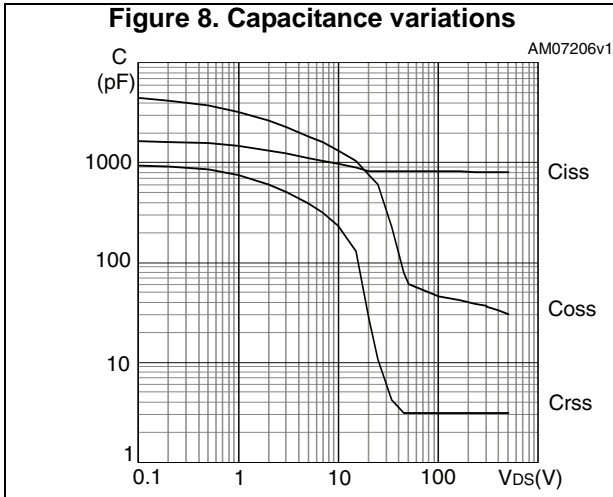


### 3 Test circuits

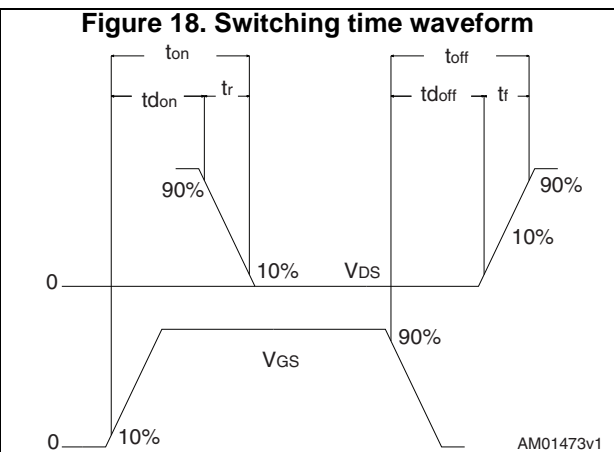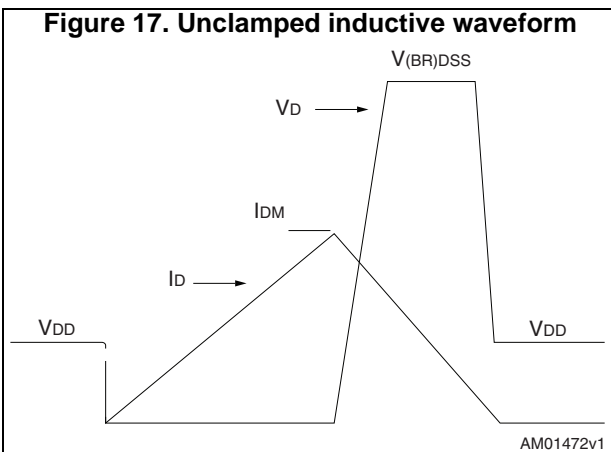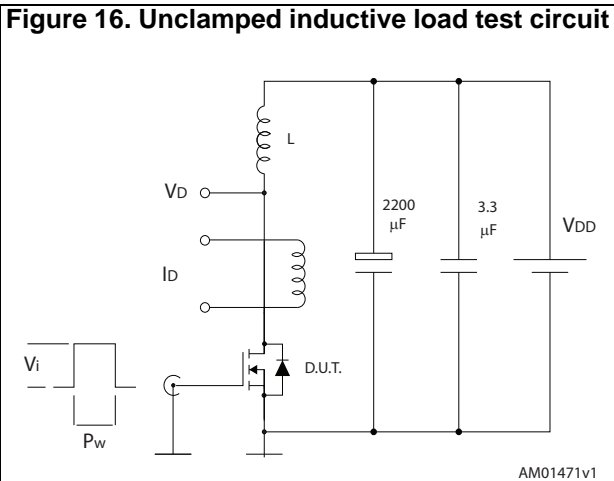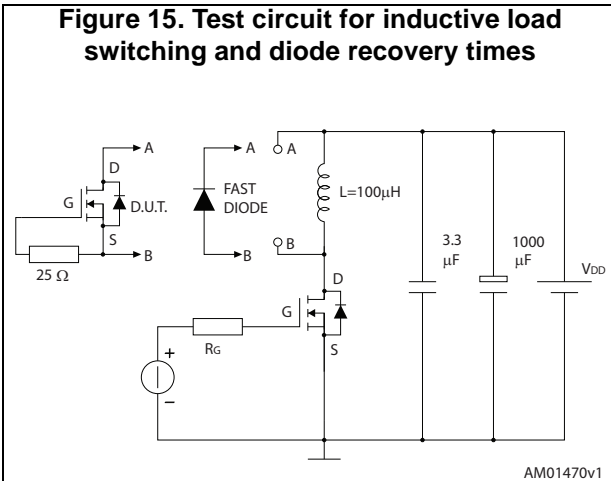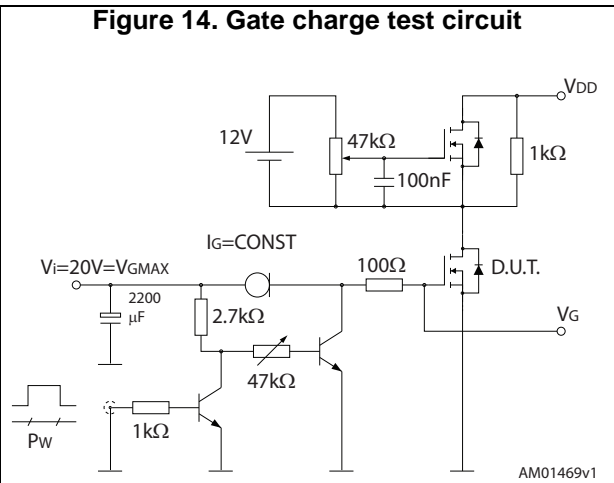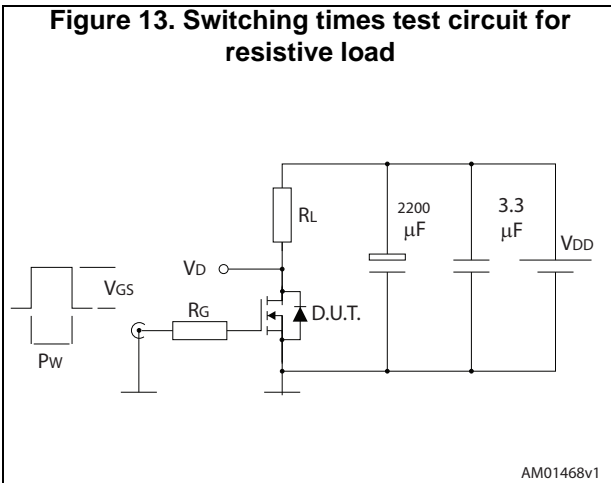

## 4 Package mechanical data

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK<sup>®</sup> packages, depending on their level of environmental compliance. ECOPACK<sup>®</sup> specifications, grade definitions and product status are available at: [www.st.com](http://www.st.com). ECOPACK<sup>®</sup> is an ST trademark.

Figure 19. D<sup>2</sup>PAK (TO-263) drawing

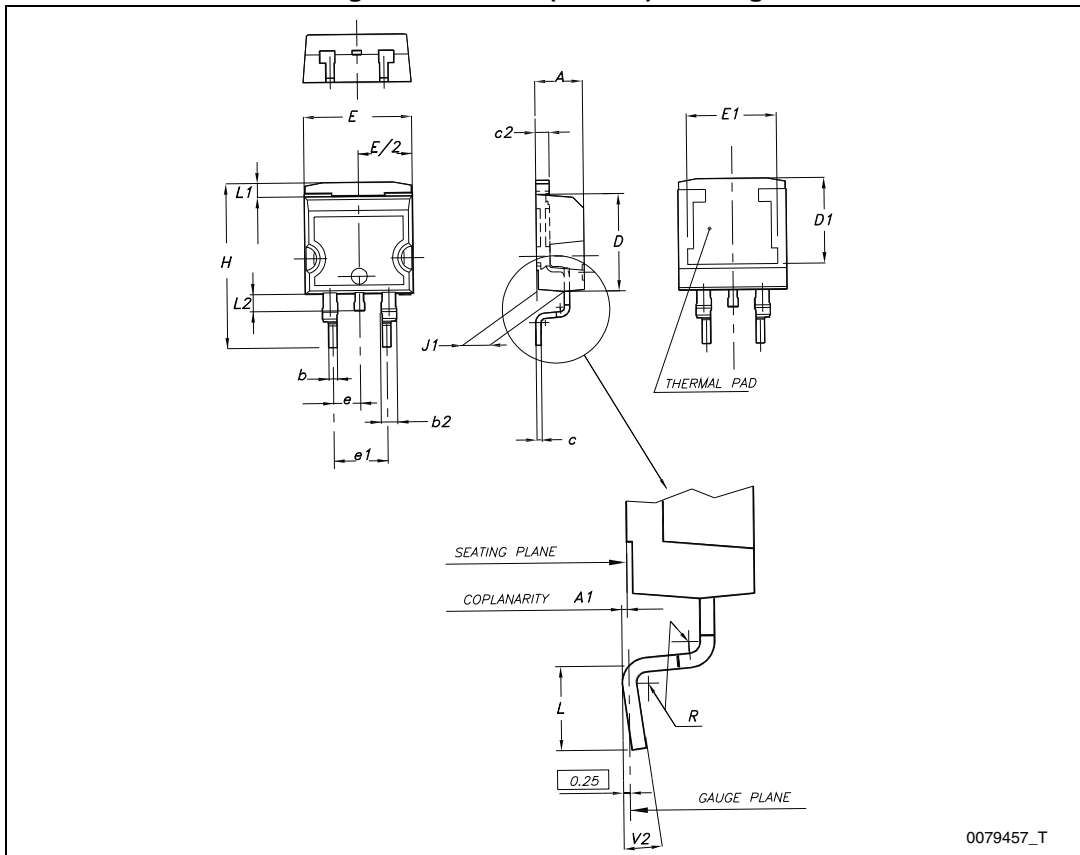


0079457\_T

Table 9. D<sup>2</sup>PAK (TO-263) mechanical data


| Dim. | mm   |      |       |
|------|------|------|-------|
|      | Min. | Typ. | Max.  |
| A    | 4.40 |      | 4.60  |
| A1   | 0.03 |      | 0.23  |
| b    | 0.70 |      | 0.93  |
| b2   | 1.14 |      | 1.70  |
| c    | 0.45 |      | 0.60  |
| c2   | 1.23 |      | 1.36  |
| D    | 8.95 |      | 9.35  |
| D1   | 7.50 |      |       |
| E    | 10   |      | 10.40 |
| E1   | 8.50 |      |       |
| e    |      | 2.54 |       |
| e1   | 4.88 |      | 5.28  |
| H    | 15   |      | 15.85 |
| J1   | 2.49 |      | 2.69  |
| L    | 2.29 |      | 2.79  |
| L1   | 1.27 |      | 1.40  |
| L2   | 1.30 |      | 1.75  |
| R    |      | 0.4  |       |
| V2   | 0°   |      | 8°    |

Figure 20. D<sup>2</sup>PAK footprint<sup>(a)</sup>

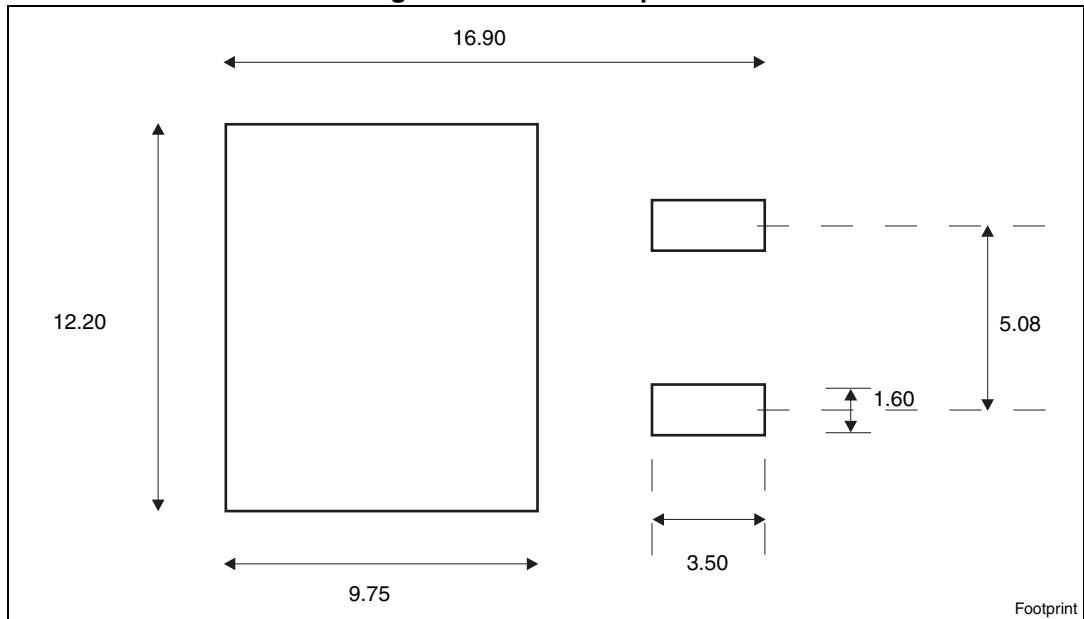


# 5 Packaging mechanical data

Figure 21. Tape

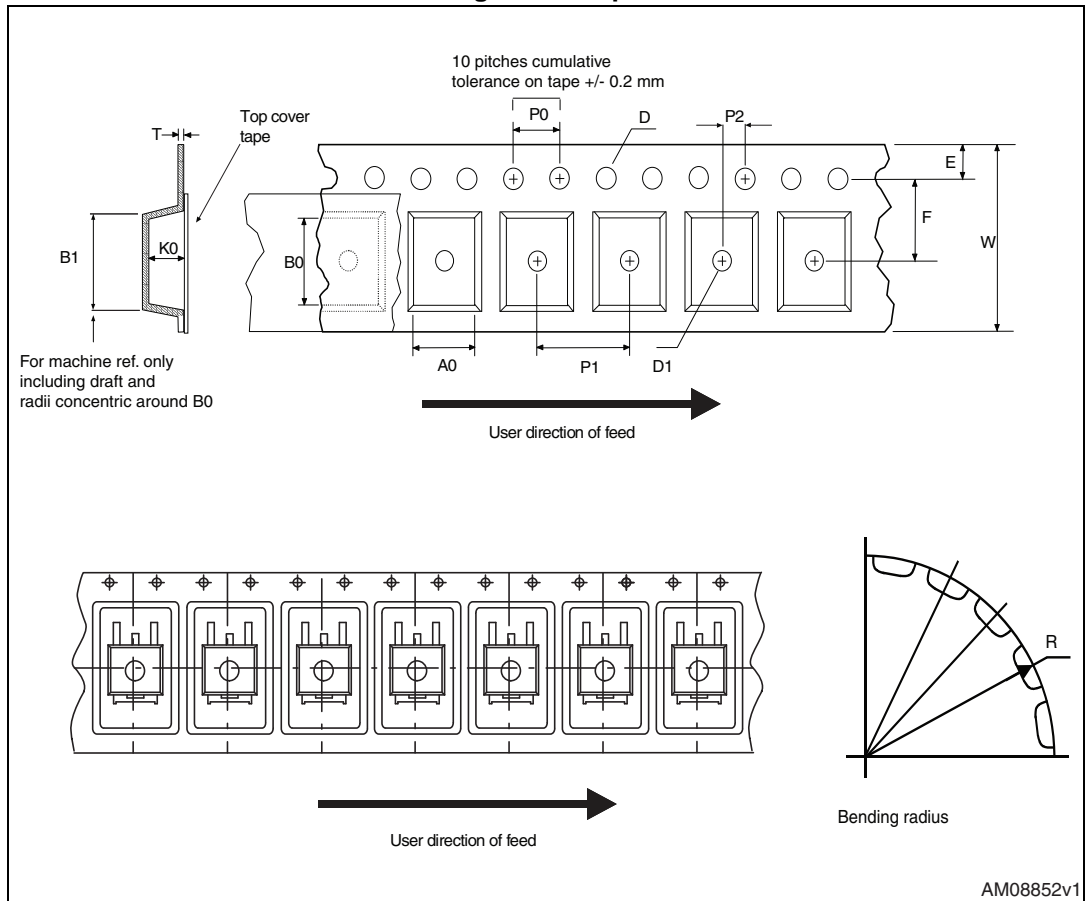

a. All dimensions are in millimeters

Figure 22. Reel

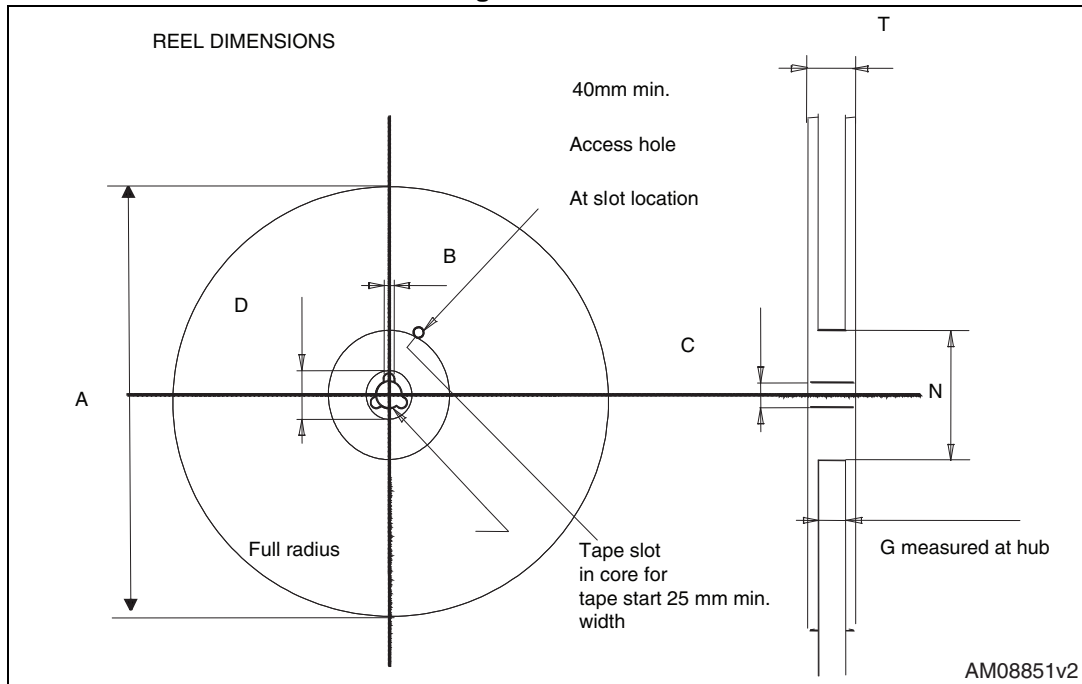

AM08851v2

Table 10. D<sup>2</sup>PAK (TO-263) and DPAK tape and reel mechanical data

| Tape |      |      | Reel     |      |      |
|------|------|------|----------|------|------|
| Dim. | mm   |      | Dim.     | mm   |      |
|      | Min. | Max. |          | Min. | Max. |
| A0   | 10.5 | 10.7 | A        |      | 330  |
| B0   | 15.7 | 15.9 | B        | 1.5  |      |
| D    | 1.5  | 1.6  | C        | 12.8 | 13.2 |
| D1   | 1.59 | 1.61 | D        | 20.2 |      |
| E    | 1.65 | 1.85 | G        | 24.4 | 26.4 |
| F    | 11.4 | 11.6 | N        | 100  |      |
| K0   | 4.8  | 5.0  | T        |      | 30.4 |
| P0   | 3.9  | 4.1  |          |      |      |
| P1   | 11.9 | 12.1 | Base qty |      | 1000 |
| P2   | 1.9  | 2.1  | Bulk qty |      | 1000 |
| R    | 50   |      |          |      |      |
| T    | 0.25 | 0.35 |          |      |      |
| W    | 23.7 | 24.3 |          |      |      |

## 6 Revision history

Table 11. Document revision history

| Date        | Revision | Changes        |
|-------------|----------|----------------|
| 27-Jun-2014 | 1        | First release. |

**Please Read Carefully:**

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

**UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.**

**ST PRODUCTS ARE NOT DESIGNED OR AUTHORIZED FOR USE IN: (A) SAFETY CRITICAL APPLICATIONS SUCH AS LIFE SUPPORTING, ACTIVE IMPLANTED DEVICES OR SYSTEMS WITH PRODUCT FUNCTIONAL SAFETY REQUIREMENTS; (B) AERONAUTIC APPLICATIONS; (C) AUTOMOTIVE APPLICATIONS OR ENVIRONMENTS, AND/OR (D) AEROSPACE APPLICATIONS OR ENVIRONMENTS. WHERE ST PRODUCTS ARE NOT DESIGNED FOR SUCH USE, THE PURCHASER SHALL USE PRODUCTS AT PURCHASER'S SOLE RISK, EVEN IF ST HAS BEEN INFORMED IN WRITING OF SUCH USAGE, UNLESS A PRODUCT IS EXPRESSLY DESIGNATED BY ST AS BEING INTENDED FOR "AUTOMOTIVE, AUTOMOTIVE SAFETY OR MEDICAL" INDUSTRY DOMAINS ACCORDING TO ST PRODUCT DESIGN SPECIFICATIONS. PRODUCTS FORMALLY ESCC, QML OR JAN QUALIFIED ARE DEEMED SUITABLE FOR USE IN AEROSPACE BY THE CORRESPONDING GOVERNMENTAL AGENCY.**

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2014 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Philippines - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

[www.st.com](http://www.st.com)



## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View STB14NM50N on WIN SOURCE](#)
-  [STMicroelectronics Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management