




**THE DATASHEET OF
T495V157M010ZTE2007280**



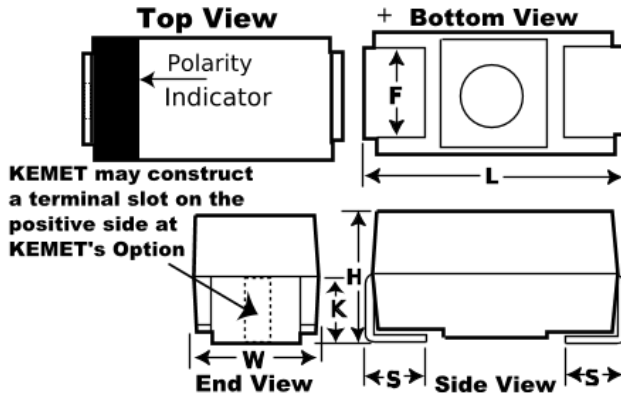

Dimensions

Footprint	7343
L	7.3mm +/-0.3mm
W	4.3mm +/-0.3mm
H	2mm MAX
S	1.3mm +/-0.3mm
F	2.4mm +/-0.1mm
K	1.7mm TYP

Packaging Specifications

Packaging	T&R, 330mm
Packaging Quantity	3750

General Information

Dielectric	MnO ₂ Tantalum
Style	SMD Chip
Description	SMD, Molded, Low Profile, Low ESR, Surge Robust
Features	Low Profile, Low ESR, Surge Robust
RoHS	Yes
Termination	Tin
AEC-Q200	No
Notes	Obsolete. Old Part Number [Obsolete] Was B45194R2157M406.

Specifications

Capacitance	150 uF
Capacitance Tolerance	20%
Voltage DC	10 VDC (85C), 6.7 VDC (125C)
Temperature Range	-55/+125°C
Rated Temperature	85°C
Dissipation Factor	8%
Failure Rate	N/A
ESR	0.2 Ohms (100kHz)
Ripple Current	790 mAmps (25C), 711 mAmps (85C), 316 mAmps (125C)
Leakage Current	15 uA

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View T495V157M010ZTE2007280 on WIN SOURCE](#)

 [Kemet Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management