



**THE DATASHEET OF
TCE1210-900-2P**



Common Mode Filters

For ultra high-speed differential signal line
(HDMI, DVI, DisplayPort, USB3.0, etc.)

TCE series

| | | |
|-------|----------|-------------------------|
| Type: | TCE1210 | [0504 inch]* |
| | TCE1210U | [0504 inch] |
| | TCE1608 | [0603 inch] |
| | | * Dimensions Code [EIA] |

Issue date: September 2011

- All specifications are subject to change without notice.
 - Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.
-

Common Mode Filters

For Ultra High-speed Differential Signal Line (HDMI, DVI, DisplayPort, USB3.0, etc.)

Conformity to RoHS Directive

TCE Series TCE1210

FEATURES

- Common mode filter for improving EMC with an ESD protection element (ESD suppressor) using thin-film processing and material technology acquired from HDD head manufacturing.
- One component can be used for suppressing common mode noise and ESD.
- Greatly reduces the number of components and installation area.
- By providing wide bandwidth (cutoff frequency: 3GHz min.) for differential mode, this product has almost no effect for high-speed differential signals and can suppress the radiated emission.
- This product contains no lead and supports lead-free soldering.

APPLICATIONS

Suppressing noise and ESD for high-speed differential signal interfaces such as USB 2.0, USB3.0 and HDMI for mobile devices such as mobile phones, smartphones, digital cameras, and portable music players, and general consumer products.


TEMPERATURE RANGES

| | |
|----------------------|--------------|
| Operating | -25 to +85°C |
| Storage(After mount) | -25 to +85°C |


PACKAGING STYLE AND QUANTITIES

| | |
|-----------------|------------------|
| Packaging style | Quantity |
| Taping | 4000 pieces/reel |

SHAPES AND DIMENSIONS/CIRCUIT DIAGRAMS

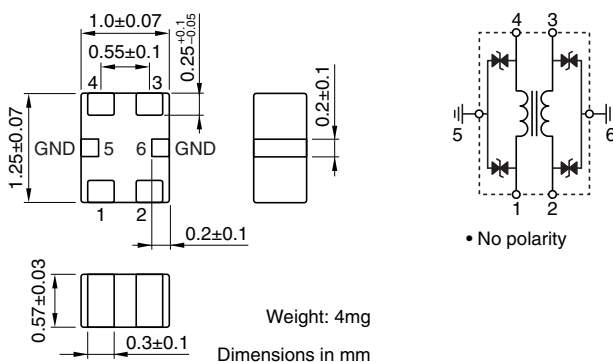

RECOMMENDED PC BOARD PATTERNS



- Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.

- All specifications are subject to change without notice.


PRODUCT IDENTIFICATION

| | | | | | | | |
|-----|------|---|-----|---|-----|---|-----|
| TCE | 1210 | - | 900 | - | 2P | - | T |
| (1) | (2) | | (3) | | (4) | | (5) |


- (1) Series name
- (2) Dimensions L×W
- (3) Impedance[at 100MHz]
900: 90Ω
- (4) Number of line
2P: 2-line
- (5) Packaging style
T: ø180mm reel taping

RECOMMENDED SOLDERING CONDITIONS

RECOMMENDED TEMPERATURE PROFILE FOR LEAD-FREE SOLDER

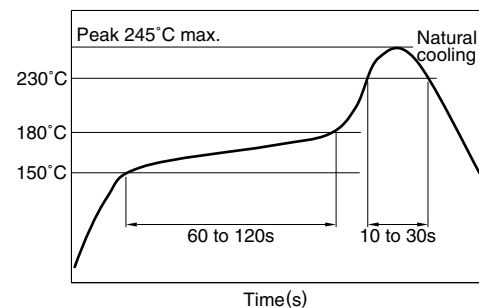


REFLOW PROFILE FOR SOLDER HEAT RESISTANCE

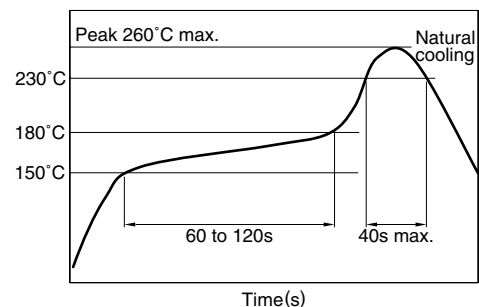

ELECTRICAL CHARACTERISTICS

| Part No. | Common mode impedance (Ω) [100MHz] | | DC resistance (Ω)max. [1 line] | Cutoff frequency (GHz)typ. | Clamp voltage (V)max. | Rated current Idc (A)max. | Rated voltage Edc (V)max. | Insulation resistance (M Ω)min. |
|----------------|---|------|---|----------------------------|-----------------------|---------------------------|---------------------------|---|
| | min. | typ. | | | | | | |
| TCE1210-900-2P | 60 | 90 | 1.75 | 5.0 | 100 | 0.1 | 10 | 1 |

TYPICAL ELECTRICAL CHARACTERISTICS IMPEDANCE vs. FREQUENCY CHARACTERISTICS

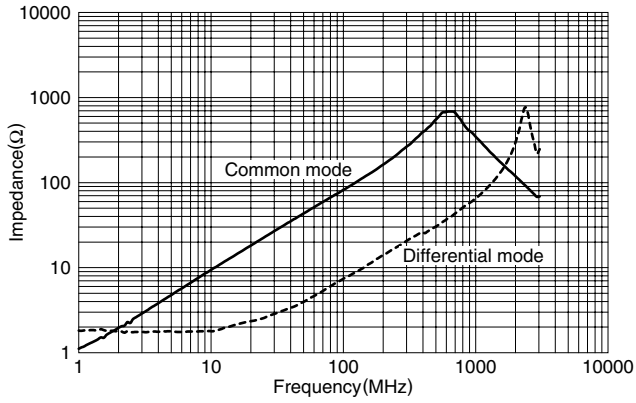

• All specifications are subject to change without notice.

Common Mode Filters

For Ultra High-speed Differential Signal Line (HDMI, DVI, DisplayPort, USB3.0, etc.)

Conformity to RoHS Directive

TCE Series TCE1210U

FEATURES

- Common mode filter for improving EMC with an ESD protection element (ESD suppressor) using thin-film processing and material technology acquired from HDD head manufacturing.
- One component can be used for suppressing common mode noise and ESD.
- Greatly reduces the number of components and installation area.
- By providing wide bandwidth (cutoff frequency: 3GHz min.) for differential mode, this product has almost no effect for high-speed differential signals and can suppress the radiated emission.
- This product contains no lead and supports lead-free soldering.

APPLICATIONS

Suppressing noise and ESD for high-speed differential signal interfaces such as USB 3.0, HDMI, and Serial ATA for mobile devices such as mobile phones, smartphones, digital cameras, and portable music players, and general consumer products.


TEMPERATURE RANGES

| | |
|----------------------|--------------|
| Operating | -25 to +85°C |
| Storage(After mount) | -25 to +85°C |


PACKAGING STYLE AND QUANTITIES

| | |
|-----------------|------------------|
| Packaging style | Quantity |
| Taping | 4000 pieces/reel |

SHAPES AND DIMENSIONS/CIRCUIT DIAGRAMS

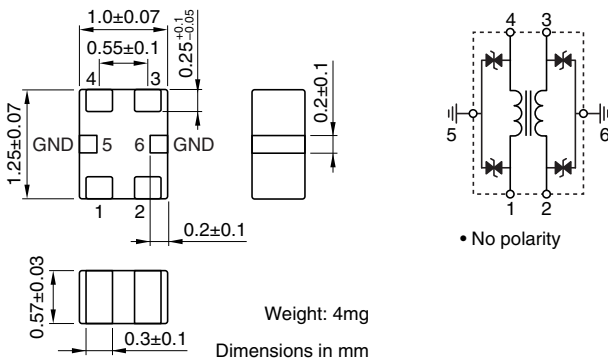

RECOMMENDED PC BOARD PATTERNS



- Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.

- All specifications are subject to change without notice.


PRODUCT IDENTIFICATION

| | | | | | | | | |
|-----|------|-----|-----|-----|-----|----|---|---|
| TCE | 1210 | □ | - | 500 | - | 2P | - | T |
| (1) | (2) | (3) | (4) | (5) | (6) | | | |


- (1) Series name
- (2) Dimensions L×W
- (3) Product identification number
- (4) Impedance[at 100MHz]
500: 50Ω
- (5) Number of line
2P: 2-line
- (6) Packaging style
T: ø180mm reel taping

RECOMMENDED SOLDERING CONDITIONS

RECOMMENDED TEMPERATURE PROFILE FOR LEAD-FREE SOLDER

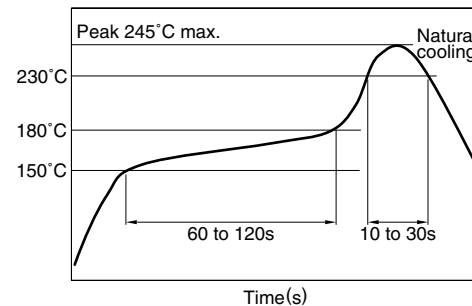

REFLOW PROFILE FOR SOLDER HEAT RESISTANCE

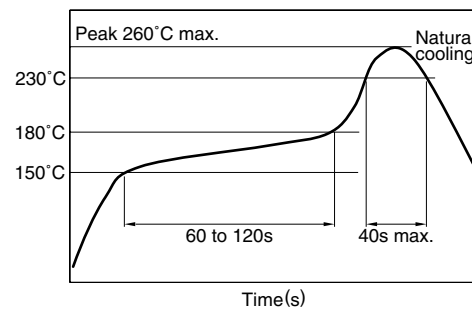


ELECTRICAL CHARACTERISTICS

| Part No. | Common mode impedance (Ω) [100MHz] | DC resistance (Ω)max. [1 line] | Cutoff frequency (GHz)typ. | Clamp voltage (V)max. | Rated current Idc (A)max. | Rated voltage Edc (V)max. | Insulation resistance (M Ω)min. |
|-----------------|---|---|----------------------------|-----------------------|---------------------------|---------------------------|---|
| TCE1210U-500-2P | 50 \pm 20 | 1.7 | 6.5 | 100 | 0.1 | 10 | 1 |
| TCE1210U-120-2P | 12 \pm 5 | 0.7 | 8.0 | 120 | 0.1 | 10 | 1 |

TYPICAL ELECTRICAL CHARACTERISTICS

IMPEDANCE vs. FREQUENCY CHARACTERISTICS

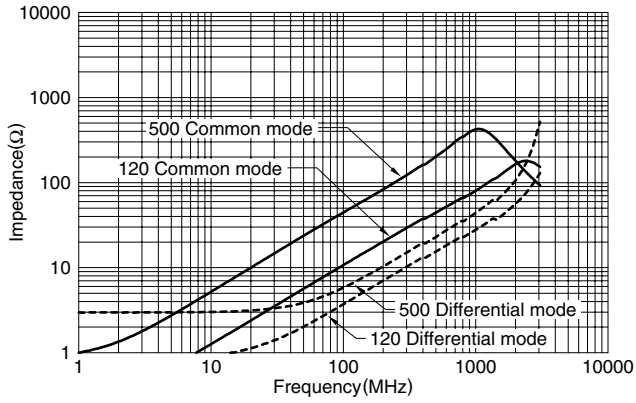

Common Mode Filters For Ultra High-speed Differential Signal Line (HDMI, DVI, DisplayPort, USB3.0, etc.)

Conformity to RoHS Directive

TCE Series TCE1608

FEATURES

- Common mode filter for improving EMC with an ESD protection element (ESD Suppressor) using thin-film processing and material technology acquired from HDD head manufacturing.
- One component can be used for suppressing common mode noise and ESD.
- Greatly reduces the number of components and installation area.
- By providing wide bandwidth (cutoff frequency: 3GHz min.) for differential mode, this product has almost no effect for high-speed differential signals and can suppress the radiated emission.
- This product contains no lead and supports lead-free soldering.

APPLICATIONS

Suppressing noise and ESD for high-speed differential signal interfaces such as USB 3.0, HDMI, and Serial ATA for mobile devices such as mobile phones, smartphones, digital cameras, and portable music players, and general consumer products.

TEMPERATURE RANGES

| | |
|----------------------|--------------|
| Operating | -25 to +85°C |
| Storage(After mount) | -25 to +85°C |

PACKAGING STYLE AND QUANTITIES

| | |
|-----------------|------------------|
| Packaging style | Quantity |
| Taping | 4000 pieces/reel |


PRODUCT IDENTIFICATION

TCE 1608 - 900 - 4P - T
(1) (2) (3) (4) (5)


- (1) Series name
- (2) Dimensions L×W
- (3) Impedance[at 100MHz]
900: 90Ω
- (4) Number of line
4P: 4-line
- (5) Packaging style
T: ø180mm reel taping

RECOMMENDED SOLDERING CONDITIONS

RECOMMENDED TEMPERATURE PROFILE FOR LEAD-FREE SOLDER

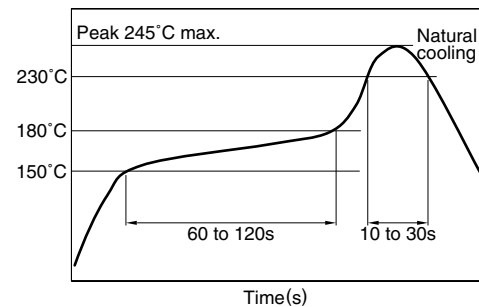


REFLOW PROFILE FOR SOLDER HEAT RESISTANCE

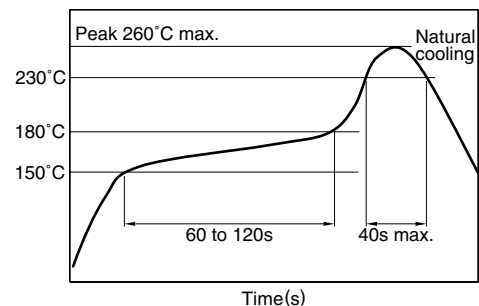


• Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.

• All specifications are subject to change without notice.

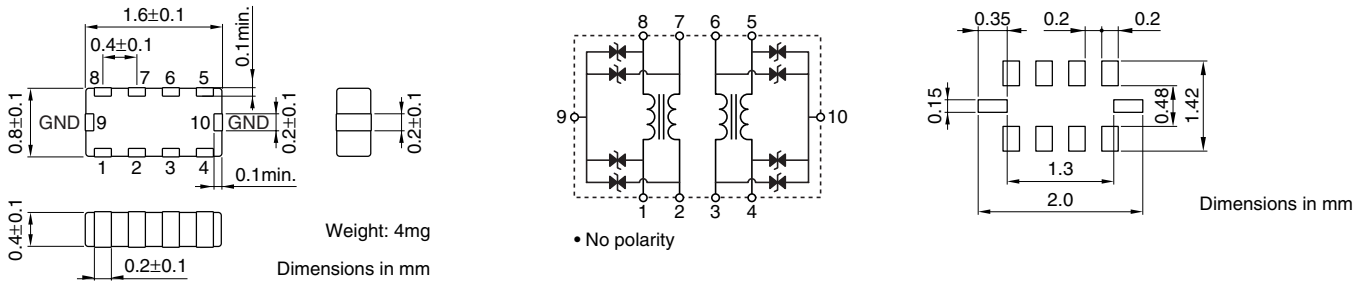SHAPES AND DIMENSIONS/CIRCUIT DIAGRAMS/RECOMMENDED PC BOARD PATTERNS

ELECTRICAL CHARACTERISTICS
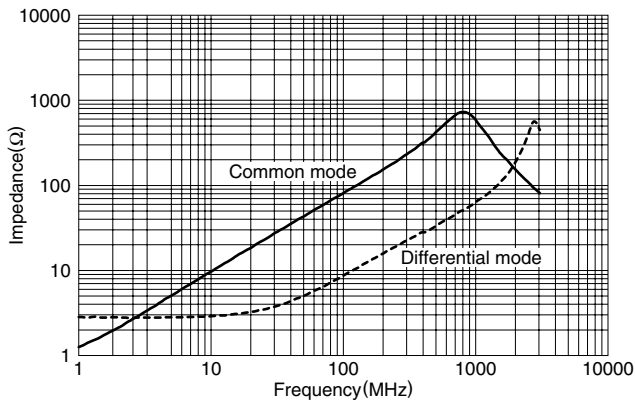
| Part No. | Common mode impedance (Ω) [100MHz] | | DC resistance (Ω)max. [1 line] | Cutoff frequency (GHz)typ. | Clamp voltage (V)max. | Rated current I_{dc} (A)max. | Rated voltage E_{dc} (V)max. | Insulation resistance ($M\Omega$)min. |
|----------------|---|------|---|----------------------------|-----------------------|--------------------------------|--------------------------------|---|
| | min. | typ. | | | | | | |
| TCE1608-900-4P | 60 | 90 | 1.95 | 5.0 | 100 | 0.1 | 10 | 1 |

TYPICAL ELECTRICAL CHARACTERISTICS
IMPEDANCE vs. FREQUENCY CHARACTERISTICS


Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- ⊖ [View TCE1210-900-2P on WIN SOURCE](#)
- ⊖ [TDK Corporation Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management