




**THE DATASHEET OF
VC060305A150RP**



TransGuard®

AVX Multilayer Ceramic Transient Voltage Suppressors

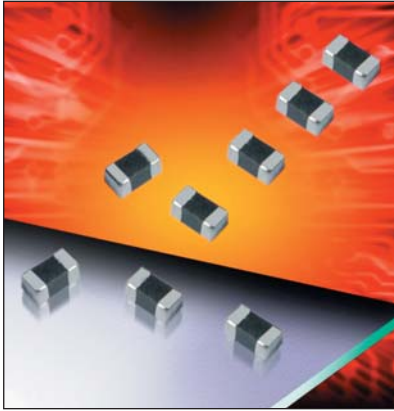

GENERAL DESCRIPTION

TransGuard® multilayer varistors are zinc oxide (ZnO) based ceramic semiconductor devices with non-linear voltage-current characteristics (bi-directional) similar to back-to-back zener diodes. They have the added advantage of greater current and energy handling capabilities as well as EMI/RFI attenuation.

The increasing use of electronics technologies in all areas require reliable protection against transient voltages that could damage the electronics circuitry as well as EMI/RFI attenuation to prevent signal distortion and to meet regulatory requirements. AVX TransGuard components help achieve both functions with single component.

GENERAL CHARACTERISTICS

- Operating Temperature: -55°C to +125°C
- Working Voltage: 3.3 - 85Vdc
- Case Size: 0402 - 1812
- Energy: 0.05 - 4.2J
- Peak Current: 20 - 2000A

FEATURES

- Bi-Directional protection
- Very fast response to ESD strikes
- Multi-strike capability
- High Reliability
- EMI/RFI Filtering
- Wide range of components

APPLICATIONS

- IC Protection
- Micro Controllers
- Relays
- I/O Ports
- Keyboard Protection
- Portable devices
- Industrial Controllers
- Automation
- Smart Grid
- Telecom
- LED Lights
- Cameras
- Base Stations
- Motion detector
- Alarms
- and more

HOW TO ORDER

| VC | 1206 | 18 | D | 400 | R | P | | | |
|---|--|---|--|---|---|---|--|--|------------------|
| Varistor Chip | Case Size | Working Voltage | Energy Rating | Clamping Voltage | Packaging | Termination | | | |
| VC = Varistor Chip VG = Varistor Glass | 0402 0603 0805 1206 1210 1812 2220 3220 | 03 = 3.3Vdc 05 = 5.6Vdc 09 = 9Vdc 12 = 12Vdc 14 = 14Vdc 16 = 16Vdc 18 = 18Vdc 22 = 22Vdc 26 = 26Vdc 30 = 30Vdc | 31 = 31Vdc 38 = 38Vdc 42 = 42Vdc 45 = 45Vdc 48 = 48Vdc 56 = 56Vdc 60 = 60Vdc 65 = 65Vdc 85 = 85Vdc | X = 0.05J A = 0.1J B = 0.2J C = 0.3J D = 0.4J E = 0.5J F = 0.7J G = 0.9J H = 1.2J J = 1.5-1.6J | K = 0.6J M = 1.0J N = 1.1J P = 2.5-3.7J R = 1.7J L = 0.8J S = 1.9-2.0J U = 4.0-5.0J W = 5.1-6.0J Y = 6.5-12J | 100 = 12V 150 = 18V 200 = 22V 250 = 27V 300 = 32V 380 = 38V 390 = 42V 400 = 42V 440 = 44V 490 = 49V 540 = 54V 560 = 60V 570 = 57V | 580 = 60V 620 = 67V 650 = 67V 770 = 77V 800 = 80V 900 = 90V 101 = 100V 111 = 110V 121 = 120V 131 = 135V 151 = 150V 161 = 165V | D = 7" (1000)* R = 7" (4000 or 2000)* T = 13" (10,000)* W = 7" (10,000)** | P = Ni/Sn plated |

*Not available for 0402
**Only available for 0402

ELECTRICAL CHARACTERISTICS

| AVX PN | V _w (DC) | V _w (AC) | V _B | V _C | I _{vc} | I _L | E _T | I _P | Cap | Freq | Case |
|--------------|---------------------|---------------------|----------------|----------------|-----------------|----------------|----------------|----------------|-------|------|------|
| | V _{dc} | V _{ac} | V | V | A | μA | J | A | pF | | |
| VC060303A100 | 3.3 | 2.3 | 5.0±20% | 12 | 1 | 100 | 0.1 | 30 | 1450 | K | 0603 |
| VC080503A100 | 3.3 | 2.3 | 5.0±20% | 12 | 1 | 100 | 0.1 | 40 | 1400 | K | 0805 |
| VC080503C100 | 3.3 | 2.3 | 5.0±20% | 12 | 1 | 100 | 0.3 | 120 | 5000 | K | 0805 |
| VC120603A100 | 3.3 | 2.3 | 5.0±20% | 12 | 1 | 100 | 0.1 | 40 | 1250 | K | 1206 |
| VC120603D100 | 3.3 | 2.3 | 5.0±20% | 12 | 1 | 100 | 0.4 | 150 | 4700 | K | 1206 |
| VC040205X150 | 5.6 | 4.0 | 8.5±20% | 18 | 1 | 35 | 0.05 | 20 | 175 | M | 0402 |
| VC060305A150 | 5.6 | 4.0 | 8.5±20% | 18 | 1 | 35 | 0.1 | 30 | 750 | K | 0603 |
| VC080505A150 | 5.6 | 4.0 | 8.5±20% | 18 | 1 | 35 | 0.1 | 40 | 1100 | K | 0805 |
| VC080505C150 | 5.6 | 4.0 | 8.5±20% | 18 | 1 | 35 | 0.3 | 120 | 3000 | K | 0805 |
| VC120605A150 | 5.6 | 4.0 | 8.5±20% | 18 | 1 | 35 | 0.1 | 40 | 1200 | K | 1206 |
| VC120605D150 | 5.6 | 4.0 | 8.5±20% | 18 | 1 | 35 | 0.4 | 150 | 3000 | K | 1206 |
| VC040209X200 | 9.0 | 6.4 | 12.7±15% | 22 | 1 | 25 | 0.05 | 20 | 175 | M | 0402 |
| VC060309A200 | 9.0 | 6.4 | 12.7±15% | 22 | 1 | 25 | 0.1 | 30 | 550 | K | 0603 |
| VC080509A200 | 9.0 | 6.4 | 12.7±15% | 22 | 1 | 25 | 0.1 | 40 | 750 | K | 0805 |
| VC080512A250 | 12.0 | 8.5 | 16±15% | 27 | 1 | 25 | 0.1 | 40 | 525 | K | 0805 |
| VC040214X300 | 14.0 | 10.0 | 18.5±12% | 32 | 1 | 15 | 0.05 | 20 | 85 | K | 0402 |
| VC060314A300 | 14.0 | 10.0 | 18.5±12% | 32 | 1 | 15 | 0.1 | 30 | 350 | K | 0603 |
| VC080514A300 | 14.0 | 10.0 | 18.5±12% | 32 | 1 | 15 | 0.1 | 40 | 325 | K | 0805 |
| VC080514C300 | 14.0 | 10.0 | 18.5±12% | 32 | 1 | 15 | 0.3 | 120 | 900 | K | 0805 |
| VC120614A300 | 14.0 | 10.0 | 18.5±12% | 32 | 1 | 15 | 0.1 | 40 | 600 | K | 1206 |
| VC120614D300 | 14.0 | 10.0 | 18.5±12% | 32 | 1 | 15 | 0.4 | 150 | 1050 | K | 1206 |
| VC121016J390 | 16.0 | 13.0 | 25.5±10% | 40 | 2.5 | 10 | 1.6 | 500 | 3100 | K | 1210 |
| VG181216P390 | 16.0 | 11.0 | 24.5±10% | 40 | 5 | 15 | 2.9 | 1000 | 7000 | K | 1812 |
| VG181216P400 | 16.0 | 11.0 | 24.5±10% | 42 | 5 | 10 | 2.9 | 1000 | 5000 | K | 1812 |
| VG222016Y400 | 16.0 | 11.0 | 24.5±10% | 42 | 10 | 10 | 7.2 | 1500 | 13000 | K | 2220 |
| VC040218X400 | 18.0 | 13.0 | 25.5±10% | 42 | 1 | 10 | 0.05 | 20 | 65 | M | 0402 |
| VC060318A400 | 18.0 | 13.0 | 25.5±10% | 42 | 1 | 10 | 0.1 | 30 | 150 | K | 0603 |
| VC080518A400 | 18.0 | 13.0 | 25.5±10% | 42 | 1 | 10 | 0.1 | 30 | 225 | K | 0805 |
| VC080518C400 | 18.0 | 13.0 | 25.5±10% | 42 | 1 | 10 | 0.3 | 100 | 550 | K | 0805 |
| VC120618A400 | 18.0 | 13.0 | 25.5±10% | 42 | 1 | 10 | 0.1 | 30 | 350 | K | 1206 |
| VC120618D400 | 18.0 | 13.0 | 25.5±10% | 42 | 1 | 10 | 0.4 | 150 | 900 | K | 1206 |
| VC120618E380 | 18.0 | 13.0 | 25.5±10% | 38 | 1 | 15 | 0.5 | 200 | 930 | K | 1206 |
| VG121018J380 | 18.0 | 14.0 | 22±10% | 38 | 2.5 | 15 | 1.5 | 400 | 2300 | K | 1210 |
| VC121018J390 | 18.0 | 13.0 | 25.5±10% | 42 | 5 | 10 | 1.6 | 500 | 3100 | K | 1210 |
| VG181218P380 | 18.0 | 14 | 22±10% | 38 | 5 | 15 | 2.3 | 800 | 5000 | K | 1218 |
| VG181218P440 | 18.0 | 14.0 | 27.5±10% | 44 | 5 | 15 | 2.9 | 800 | 5000 | K | 1812 |
| VG222018W380 | 18.0 | 14.0 | 22±10% | 38 | 10 | 15 | 5.8 | 1200 | 18000 | K | 2220 |
| VG121022R440 | 22.0 | 17.0 | 27±10% | 44 | 2.5 | 15 | 1.7 | 400 | 1600 | K | 1210 |
| VG222022Y440 | 22.0 | 17.0 | 27±10% | 44 | 10 | 15 | 7.2 | 1200 | 18000 | K | 2220 |
| VG222022Y490 | 22.0 | 17.0 | 30±10% | 49 | 10 | 15 | 6.8 | 1200 | 12000 | K | 2220 |
| VC060326A580 | 26.0 | 18.0 | 34.5±10% | 60 | 1 | 10 | 0.1 | 30 | 155 | K | 0603 |
| VC080526A580 | 26.0 | 18.0 | 34.5±10% | 60 | 1 | 10 | 0.1 | 30 | 120 | K | 0805 |
| VC080526C580 | 26.0 | 18.0 | 34.5±10% | 60 | 1 | 10 | 0.3 | 100 | 250 | K | 0805 |
| VC120626D580 | 26.0 | 18.0 | 34.5±10% | 60 | 1 | 10 | 0.4 | 120 | 500 | K | 1206 |
| VC120626F540 | 26.0 | 20.0 | 33.0±10% | 54 | 1 | 15 | 0.7 | 200 | 600 | K | 1206 |
| VC121026H560 | 26.0 | 18.0 | 34.5±10% | 60 | 5 | 10 | 1.2 | 300 | 2150 | K | 1210 |
| VG121026S540 | 26.0 | 20.0 | 33±10% | 54 | 2.5 | 15 | 1.9 | 400 | 1600 | K | 1210 |
| VG181226P540 | 26.0 | 20 | 35±10% | 54 | 5 | 15 | 3 | 800 | 3000 | K | 1812 |


ELECTRICAL CHARACTERISTICS

| AVX PN | V _w (DC) | V _w (AC) | V _B | V _C | I _{Vc} | I _L | E _T | I _P | Cap | Freq | Case |
|--------------|---------------------|---------------------|----------------|----------------|-----------------|----------------|----------------|----------------|-------|------|------|
| | V _{dc} | V _{ac} | V | V | A | μA | J | A | pF | | |
| VG181226P570 | 26.0 | 23.0 | 35.0±10% | 57 | 5 | 15 | 2.5 | 600 | 3000 | K | 1812 |
| VG181226P540 | 26.0 | 20.0 | 35.0±10% | 54 | 5 | 15 | 3.0 | 800 | 3000 | K | 1812 |
| VG222026Y540 | 26.0 | 20.0 | 33.0±10% | 54 | 10 | 15 | 7.8 | 1200 | 11000 | K | 2220 |
| VG222026Y570 | 26.0 | 23.0 | 35.0±10% | 57 | 10 | 15 | 6.8 | 1100 | 7000 | K | 2220 |
| VG322026N570 | 26.0 | 20.0 | 33.0±10% | 57 | 10 | 15 | 1.1 | 400 | 5500 | K | 3220 |
| VC060330A650 | 30.0 | 21.0 | 41.0±10% | 67 | 1 | 10 | 0.1 | 30 | 125 | K | 0603 |
| VC080530A650 | 30.0 | 21.0 | 41.0±10% | 67 | 1 | 10 | 0.1 | 30 | 90 | M | 0805 |
| VC080530C650 | 30.0 | 21.0 | 41.0±10% | 67 | 1 | 10 | 0.3 | 80 | 250 | K | 0805 |
| VC120630D650 | 30.0 | 21.0 | 41.0±10% | 67 | 1 | 10 | 0.4 | 120 | 400 | K | 1206 |
| VC121030G620 | 30.0 | 21.0 | 41.0±10% | 67 | 5 | 10 | 0.9 | 220 | 1750 | K | 1210 |
| VC121030H620 | 30.0 | 21.0 | 41.0±10% | 67 | 5 | 10 | 1.2 | 280 | 1850 | K | 1210 |
| VC121030S620 | 30.0 | 21.0 | 41.0±10% | 67 | 5 | 10 | 1.9 | 300 | 1500 | K | 1210 |
| VC080531C650 | 31.0 | 25.0 | 39.0±10% | 65 | 1 | 10 | 0.3 | 80 | 250 | K | 0805 |
| VC120631M650 | 31.0 | 25.0 | 39.0±10% | 65 | 1 | 15 | 1.0 | 200 | 500 | K | 1206 |
| VG121031R650 | 31.0 | 25.0 | 39.0±10% | 65 | 2.5 | 15 | 1.7 | 300 | 1200 | K | 1210 |
| VG181231P650 | 31.0 | 25.0 | 39.0±10% | 65 | 5 | 15 | 3.7 | 800 | 2600 | K | 1812 |
| VG222031Y650 | 31.0 | 25.0 | 39.0±10% | 65 | 10 | 15 | 9.6 | 1200 | 6100 | K | 2220 |
| VC080538C770 | 38.0 | 30.0 | 47.0±10% | 77 | 1 | 10 | 0.3 | 80 | 200 | K | 0805 |
| VC120638N770 | 38.0 | 30.0 | 47.0±10% | 77 | 1 | 15 | 1.1 | 200 | 400 | K | 1206 |
| VG121038S770 | 38.0 | 30.0 | 47.0±10% | 77 | 2.5 | 15 | 2.0 | 400 | 1000 | K | 1210 |
| VG181238U770 | 38.0 | 30.0 | 47.0±10% | 77 | 5 | 15 | 4.2 | 800 | 1300 | K | 1812 |
| VG222038Y770 | 38.0 | 30.0 | 47.0±10% | 77 | 10 | 15 | 12 | 2000 | 4200 | K | 2220 |
| VG322038J920 | 38.0 | 30.0 | 47.0±10% | 92 | 10 | 15 | 1.5 | 400 | 2600 | K | 3220 |
| VC120642L800 | 42.0 | 32.0 | 51.0±10% | 80 | 1 | 15 | 0.8 | 180 | 600 | K | 1206 |
| VC120645K900 | 45.0 | 35.0 | 56.0±10% | 90 | 1 | 15 | 0.6 | 200 | 260 | K | 1206 |
| VG121045S900 | 45.0 | 35.0 | 56.0±10% | 90 | 2.5 | 15 | 2 | 300 | 800 | K | 1210 |
| VG181245U900 | 45.0 | 35.0 | 56.0±10% | 90 | 5 | 15 | 4.0 | 500 | 1200 | K | 1812 |
| VG222045Y900 | 45.0 | 35.0 | 56.0±10% | 90 | 10 | 15 | 12 | 1000 | 5000 | K | 2220 |
| VC120648D101 | 48.0 | 34.0 | 62.0±10% | 100 | 1 | 10 | 0.4 | 100 | 225 | K | 1206 |
| VC121048G101 | 48.0 | 34.0 | 62.0±10% | 100 | 5 | 10 | 0.9 | 220 | 450 | K | 1210 |
| VC121048H101 | 48.0 | 34.0 | 62.0±10% | 100 | 5 | 10 | 1.2 | 250 | 500 | K | 1210 |
| VC120656F111 | 56.0 | 40.0 | 68.0±10% | 110 | 1 | 15 | 0.7 | 100 | 180 | K | 1206 |
| VG121056P111 | 56.0 | 40.0 | 68.0±10% | 110 | 2.5 | 15 | 2.3 | 250 | 500 | K | 1210 |
| VG181256U111 | 56.0 | 40.0 | 68.0±10% | 110 | 5 | 15 | 4.8 | 500 | 800 | K | 1812 |
| VG222056Y111 | 56.0 | 40.0 | 68.0±10% | 110 | 10 | 15 | 9 | 1000 | 2000 | K | 2220 |
| VC121060J121 | 60.0 | 42.0 | 76.0±10% | 120 | 5 | 10 | 1.5 | 250 | 400 | K | 1210 |
| VC120665L131 | 65.0 | 50.0 | 82.0±10% | 135 | 1 | 15 | 0.8 | 100 | 250 | K | 1206 |
| VC120665M131 | 65.0 | 50.0 | 82.0±10% | 135 | 1 | 15 | 1.0 | 150 | 250 | K | 1206 |
| VG121065P131 | 65.0 | 50.0 | 82.0±10% | 135 | 2.5 | 15 | 2.7 | 350 | 600 | K | 1210 |
| VG181265U131 | 65.0 | 50.0 | 82.0±10% | 135 | 5 | 15 | 4.5 | 400 | 600 | K | 1812 |
| VG222065Y131 | 65.0 | 50.0 | 82.0±10% | 135 | 10 | 15 | 6.5 | 800 | 3000 | K | 2220 |
| VC121085S151 | 85.0 | 60.0 | 100±10% | 150 | 1 | 35 | 2.0 | 250 | 275 | K | 1210 |
| VG181285U161 | 85.0 | 60.0 | 100±10% | 165 | 5 | 15 | 4.5 | 400 | 500 | K | 1812 |
| VG222085Y161 | 85.0 | 60.0 | 100±10% | 165 | 10 | 15 | 6.8 | 800 | 1500 | K | 2220 |

| | | | |
|---------------------|---|----------------|---|
| V _w (DC) | DC Working Voltage (V) | E _T | Transient Energy Rating (J, 10x1000μS) |
| V _w (AC) | AC Working Voltage (V) | I _p | Peak Current Rating (A, 8x20μS) |
| V _B | Typical Breakdown Voltage (V @ 1mA _{Vc}) | Cap | Typical Capacitance (pF) @ frequency specified and 0.5 V _{RMS} |
| V _C | Clamping Voltage (V @ I _{Vc}) | Freq | Frequency at which capacitance is measured (K = 1kHz, M = 1MHz) |
| I _{Vc} | Test Current for V _C (A, 8x20μS) | | |
| I _L | Maximum Leakage Current at the Working Voltage (μA) | | |

TransGuard®

AVX Multilayer Ceramic Transient Voltage Suppressors

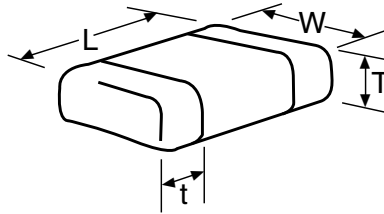


DIMENSIONS: mm (inches)

| AVX Style | | 0402 | 0603 | 0805 | 1206 | 1210 | 1812 | 2220 | 3220 |
|-------------------|-------------|----------------------------|----------------------------|----------------------------|--|----------------------------|----------------------------|----------------------------|----------------------------|
| (L) Length | mm (in.) | 1.00±0.10 (0.040±0.004) | 1.60±0.15 (0.063±0.006) | 2.01±0.20 (0.079±0.008) | 3.20±0.20 (0.126±0.008) | 3.20±0.20 (0.126±0.008) | 4.50±0.30 (0.177±0.012) | 5.70±0.40 (0.224±0.016) | 8.20±0.40 (0.323±0.016) |
| (W) Width | mm (in.) | 0.50±0.10 (0.020±0.004) | 0.80±0.15 (0.031±0.006) | 1.25±0.20 (0.049±0.008) | 1.60±0.20 (0.063±0.008) | 2.49±0.20 (0.098±0.008) | 3.20±0.30 (0.126±0.012) | 5.00±0.40 (0.197±0.016) | 5.00±0.40 (0.197±0.016) |
| (T) Max Thickness | mm (in.) | 0.6 (0.024) | 0.9 (0.035) | 1.02 (0.040) | 1.02 (0.040) 1.27 (0.050) ¹⁾ 1.70 (0.067) ²⁾ | 1.70 (0.067) | 2.00 (0.080) | 2.50 (0.098) | 2.50 max. (0.098 max.) |
| (t) Land Length | mm (in.) | 0.25±0.15 (0.010±0.006) | 0.35±0.15 (0.014±0.006) | 0.71 max. (0.028 max.) | 0.94 max. (0.037 max.) | 1.14 max. (0.045 max.) | 1.00 max. (0.039 max.) | 1.00 max. (0.039 max.) | 1.30 max. (0.051 max.) |

1) Applicable for: VC120618E380

2) Applicable for: VC120626F540, VC120631M650, VC120638N770, VC120642L800, VC120645K900, VC120656F111, VC120660M131

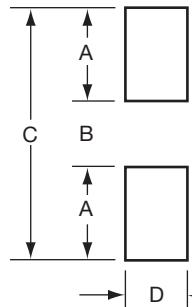

SOLDERING PAD: mm (inches)

| Pad Layout | 0402 | 0603 | 0805 | 1206 | 1210 | 1812 | 2220 | 3220 |
|------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|---------------|
| A | 1.61 (0.024) | 0.89 (0.035) | 1.02 (0.040) | 1.02 (0.040) | 1.02 (0.040) | 1.00 (0.039) | 1.00 (0.039) | 2.21 (0.087) |
| B | 1.51 (0.020) | 0.76 (0.030) | 1.02 (0.040) | 2.03 (0.080) | 2.03 (0.080) | 3.60 (0.142) | 4.60 (0.18) | 5.79 (0.228) |
| C | 1.70 (0.067) | 2.54 (0.100) | 3.05 (0.120) | 4.06 (0.160) | 4.06 (0.160) | 5.60 (0.220) | 6.60 (0.26) | 10.21 (0.402) |
| D | 1.51 (0.020) | 0.76 (0.030) | 1.27 (0.050) | 1.65 (0.065) | 2.54 (0.100) | 3.00 (0.118) | 5.00 (0.20) | 5.50 (0.217) |


TransGuard®

AVX Multilayer Ceramic Transient Voltage Suppressors

TYPICAL PERFORMANCE CURVES (0402 CHIP SIZE)

VOLTAGE/CURRENT CHARACTERISTICS


Multilayer construction and improved grain structure result in excellent transient clamping characteristics up to 20 amps peak current, while maintaining very low leakage currents under DC operating conditions. The VI curves below show the voltage/current characteristics for the 5.6V, 9V, 14V, 18V and low capacitance StaticGuard parts with currents ranging from parts of a micro amp to tens of amps.

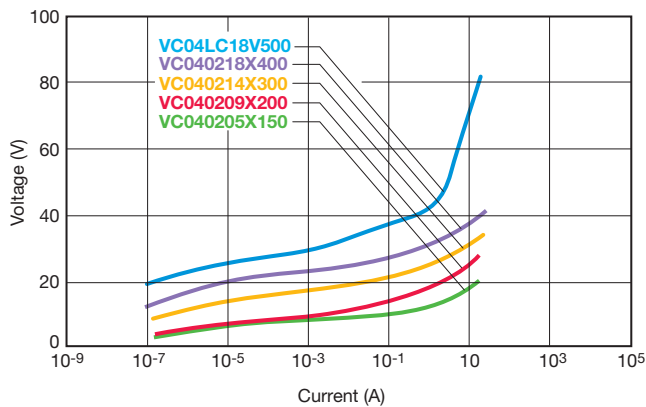


PULSE DEGRADATION

Traditionally varistors have suffered degradation of electrical performance with repeated high current pulses resulting in decreased breakdown voltage and increased leakage current. It has been suggested that irregular intergranular boundaries and bulk material result in restricted current paths and other non-Schottky barrier paralleled conduction paths in the ceramic. Repeated pulsing of TransGuard® transient voltage suppressors with 150Amp peak 8 x 20µS waveforms shows negligible degradation in breakdown voltage and minimal increases in leakage current.


ESD TEST OF 0402 PARTS

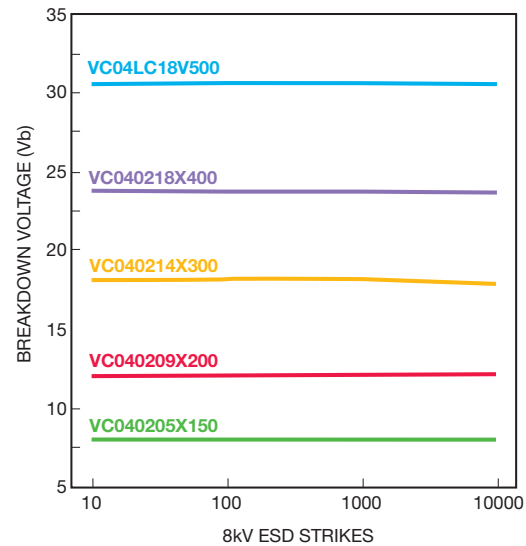

PEAK POWER VS PULSE DURATION

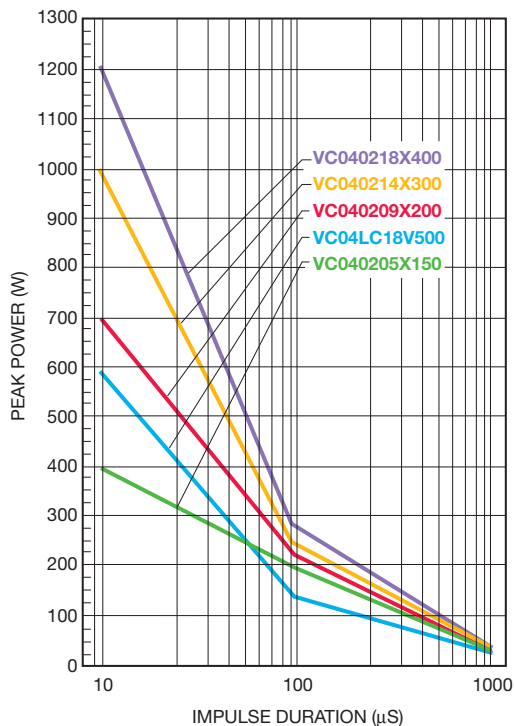

INSERTION LOSS CHARACTERISTICS

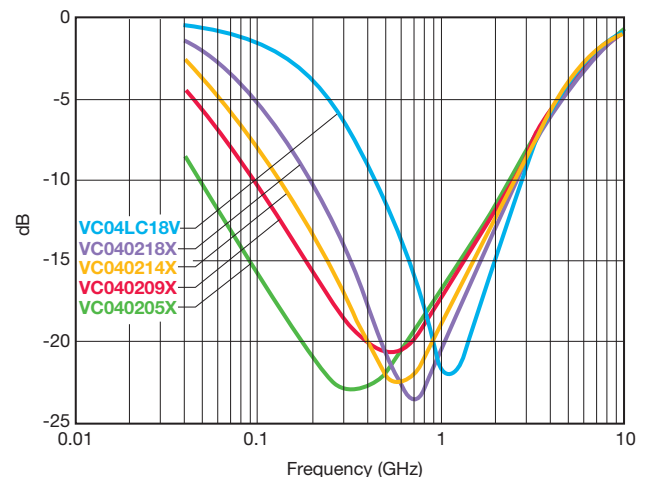


TYPICAL PERFORMANCE CURVES (0603, 0805, 1206 & 1210 CHIP SIZES)


VOLTAGE/CURRENT CHARACTERISTICS

Multilayer construction and improved grain structure result in excellent transient clamping characteristics up to 500 amps peak current, depending on case size and energy rating, while maintaining very low leakage currents under DC operating conditions. The VI curve below shows the voltage/current characteristics for the 3.3V, 5.6V, 12V, 14V, 18V, 26V, 30V, 48V and 60VDC parts with currents ranging from parts of a micro amp to tens of amps.


VI Curves - 3.3V and 5.6V Products

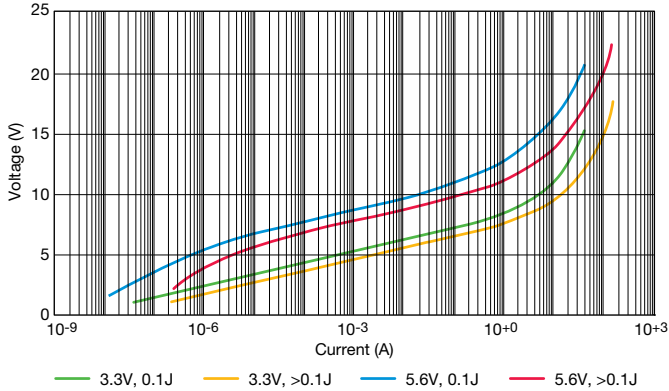


VI Curves - 9V, 12V, and 14V Products

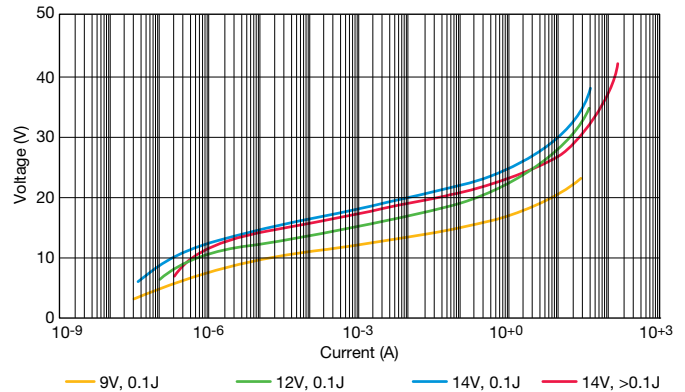


VI Curves - 18V and 26V Products

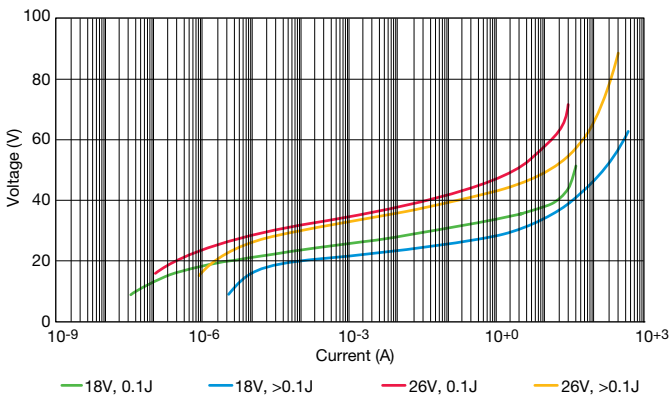

VI Curves - 30V, 48V, and 60V Products

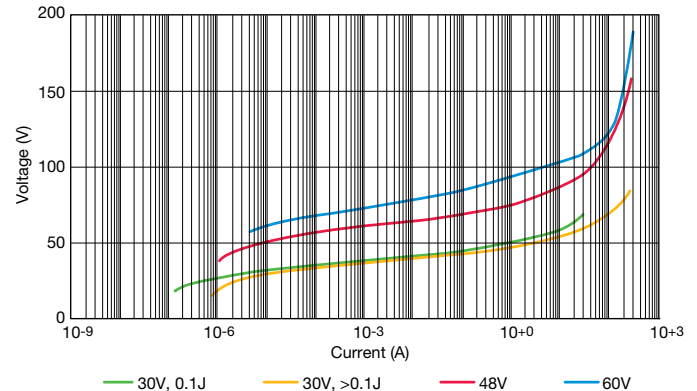

VI Curve - 85V Product

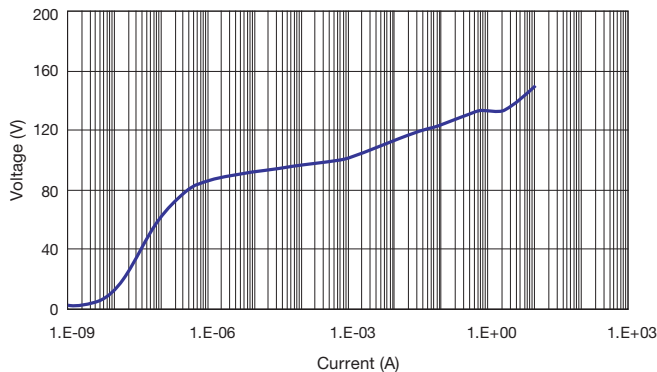


TransGuard[®]


AVX Multilayer Ceramic Transient Voltage Suppressors

TYPICAL PERFORMANCE CURVES (0603, 0805, 1206 & 1210 CHIP SIZES)


TYPICAL PULSE RATING CURVE
3.3V MULTILAYER TRANSGUARD[®]

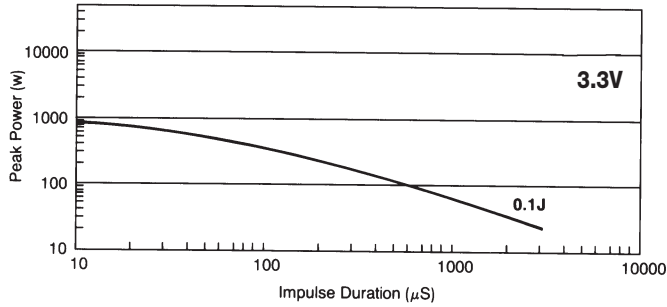


TYPICAL PULSE RATING CURVE
26V MULTILAYER TRANSGUARD[®]

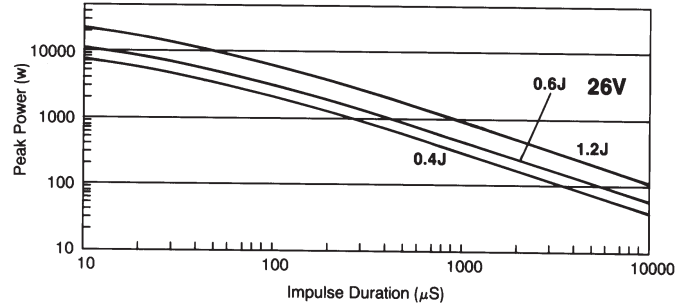


TYPICAL PULSE RATING CURVE
5.6V MULTILAYER TRANSGUARD[®]

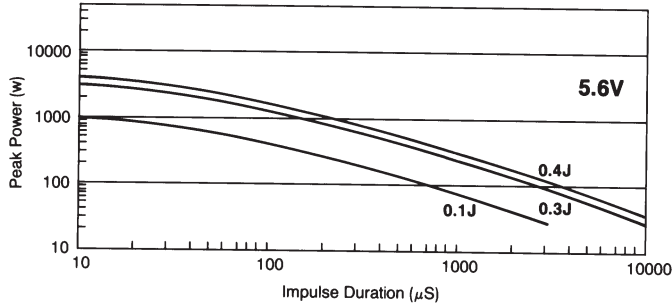


TYPICAL PULSE RATING CURVE
30V MULTILAYER TRANSGUARD[®]

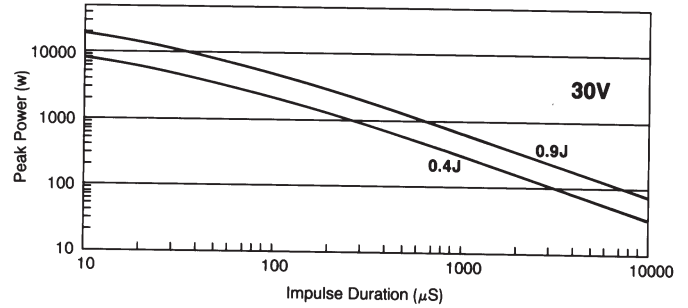


TYPICAL PULSE RATING CURVE
14V MULTILAYER TRANSGUARD[®]

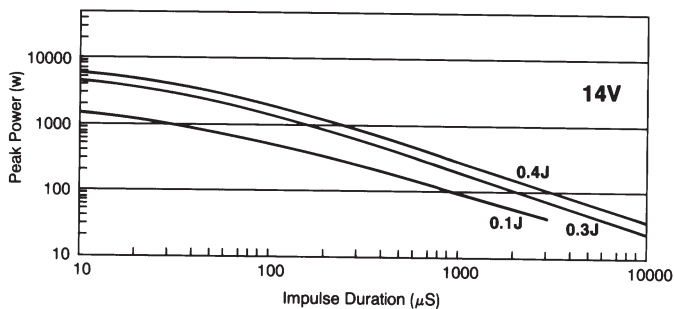


TYPICAL PULSE RATING CURVE
48V MULTILAYER TRANSGUARD[®]

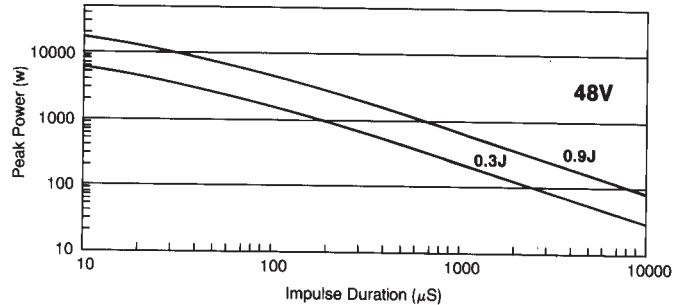

TYPICAL PULSE RATING CURVE
18V MULTILAYER TRANSGUARD[®]

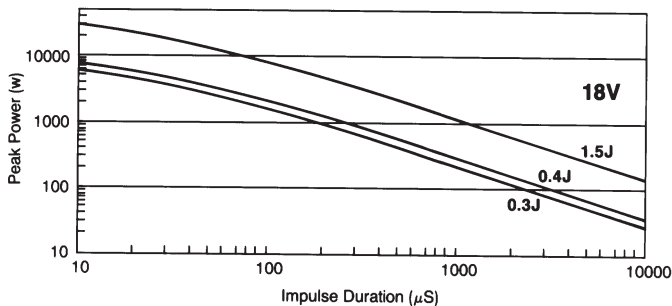







TYPICAL PULSE RATING CURVE
60V MULTILAYER TRANSGUARD[®]

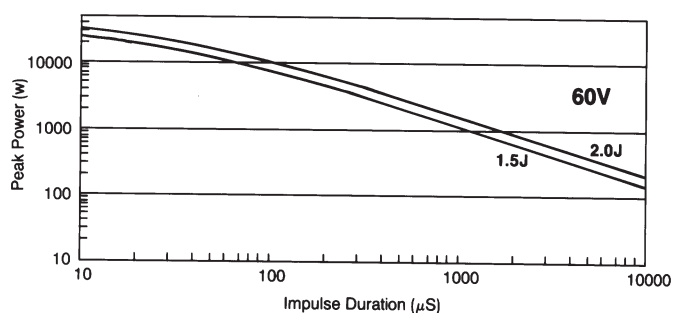

TYPICAL PERFORMANCE CURVES (0603, 0805, 1206 & 1210 CHIP SIZES)

TEMPERATURE CHARACTERISTICS

TransGuard[®] suppressors are designed to operate over the full temperature range from -55°C to +125°C. This operating temperature range is for both surface mount and axial leaded products.

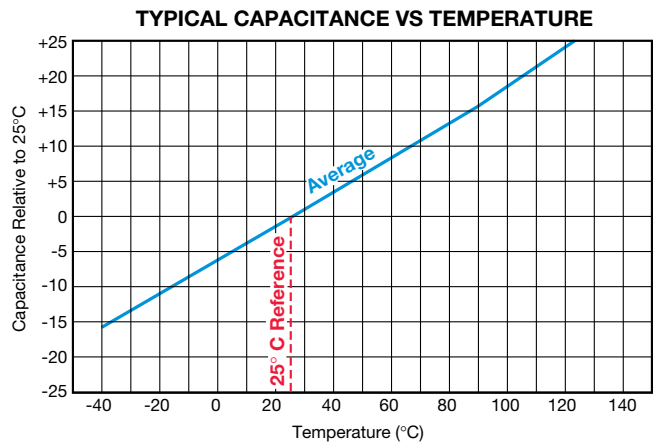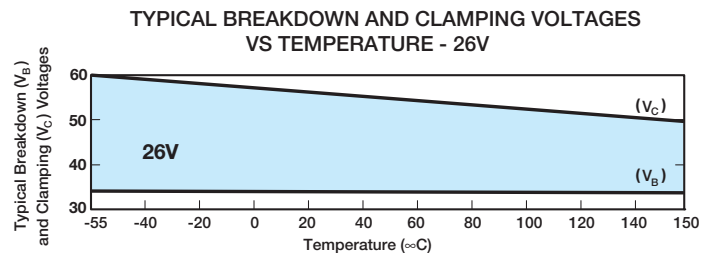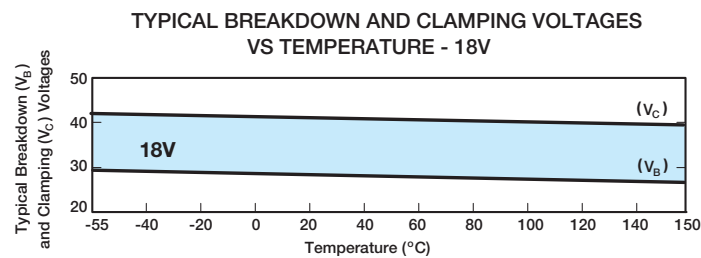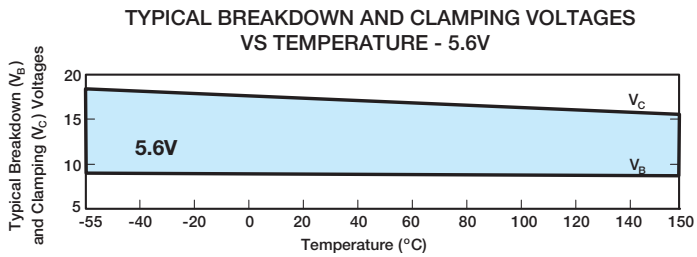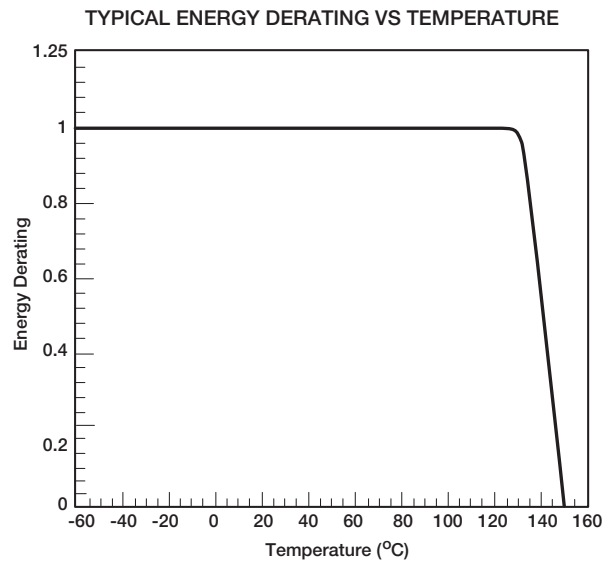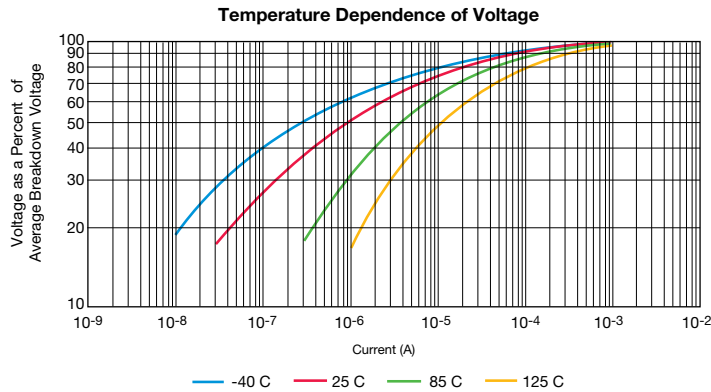

TransGuard®

AVX Multilayer Ceramic Transient Voltage Suppressors

TYPICAL PERFORMANCE CURVES (0603, 0805, 1206 & 1210 CHIP SIZES)

PULSE DEGRADATION

Traditionally varistors have suffered degradation of electrical performance with repeated high current pulses resulting in decreased breakdown voltage and increased leakage current. It has been suggested that irregular intergranular boundaries and bulk material result in restricted current paths and other non-Schottky barrier paralleled conduction paths in the ceramic. Repeated pulsing of

both 5.6 and 14V TransGuard® transient voltage suppressors with 150 Amp peak 8 x 20µs waveforms shows negligible degradation in breakdown voltage and minimal increases in leakage current. The plots of typical breakdown voltage vs number of 150A pulses are shown below.

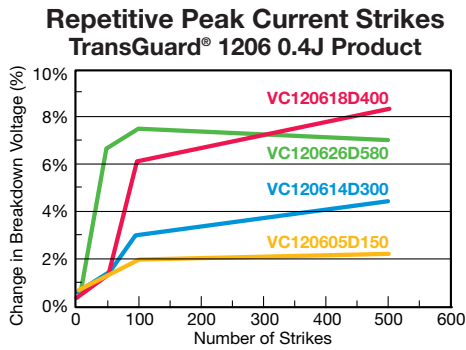


Figure 1

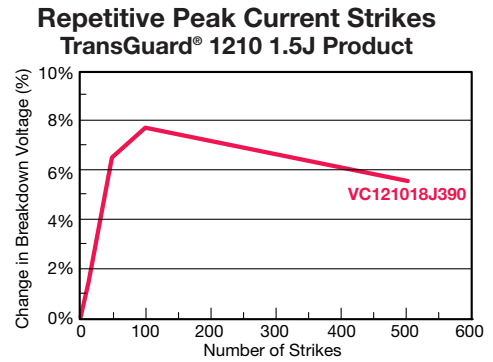


Figure 3

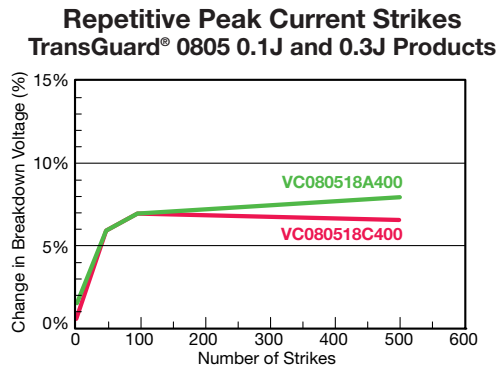


Figure 2


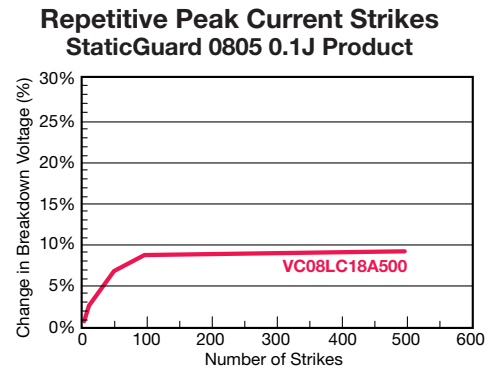



Figure 4

CAPACITANCE/FREQUENCY CHARACTERISTICS


TransGuard® Capacitance vs Frequency 0603

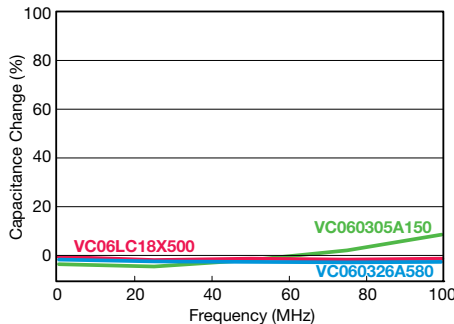

TransGuard® Capacitance vs Frequency 0805

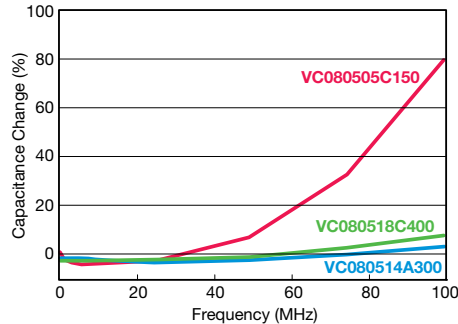

TransGuard® Capacitance vs Frequency 1206

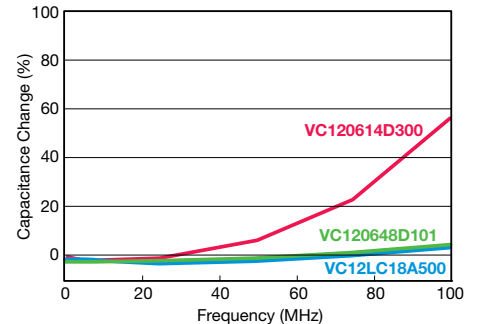

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View VC060305A150RP](#) on WIN SOURCE

 [AVX Corp/Kyocera Corp](#) Information

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management