



# THE DATASHEET OF ZTX1053A




# ZTX1053A

## NPN SILICON PLANAR ME HIGH GAIN TRANSISTOR


ISSUE 3-JANUARY 1995

### FEATURES

- \*  $V_{CE0}=75V$
  - \* 3 Amp Continuous Current
  - \* 10 Amp Pulse Current
  - \* Very Low Saturation Voltage
- APPLICATIONS
- \* Automotive Switching Circuits
  - \* DC-DC Convertors

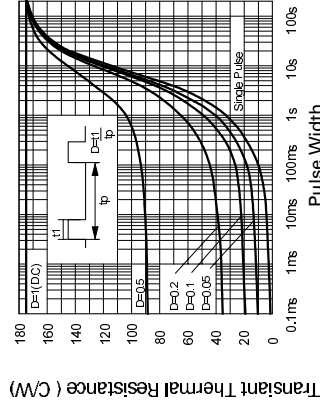

**Transient Thermal Resistance**

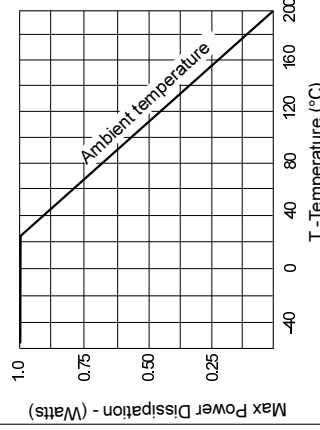

**Derating curve**

### ABSOLUTE MAXIMUM RATINGS

PARAMETER
Collector-Base Voltage
Collector-Emitter Voltage
Emitter-Base Voltage
Peak Pulse Current
Continuous Collector Current
Base Current
Power Dissipation at $T_{amb}=25^{\circ}C$
Operating and Storage Temperature Range

### SPICE PARAMETERS

\*ZETEX ZTX1053A Spice model Last revision 19/01/95

- ```

*
.MODEL ZTX1053A NPN IS=2.1E-12 NF=1.0 BF=600 IKF=2.2 VAF=100
+   |SE=0.9E-13 NE=1.25 NR=0.99 BR=150 IKR=2.5 VAR=15
+   |SC=5.0E-10 NC=1.76 RB=0.1 RE=0.028 RC=0.016
+   |CJC=75.1E-12 CJE=520E-12 MJC=0.415 MJE=0.367
+   |VJC=0.512 VJE=0.766 TF=550E-12 TR=22E-9
*
    
```

### © 1995 ZETEX PLC

The copyright in this model and the design embodied belong to Zetex PLC ("Zetex"). It is supplied free of charge by Zetex for the purpose of research and design and may be used or copied intact (including this notice) for that purpose only. All other rights are reserved. The model is believed accurate but no condition or warranty as to its merchantability or fitness for purpose is given and no liability in respect of any use is accepted by Zetex PLC, its distributors or agents.



Zetex plc.  
Fields New Road, Chadderton, Oldham, OL9 8NP, United Kingdom.  
Telephone: (44)161-627 5105 (Sales), (44)161-627 4963 (General Enquiries)  
Facsimile: (44)161-627 5467

Zetex GmbH  
Sreitelstraße 19  
D-81673 München  
Telefon: (49) 89 45 49 49 0  
Fax: (49) 89 45 49 49 49

Zetex Inc.  
87 Modular Avenue  
Commack NY11725  
Telephone: (516) 543-7100  
Fax: (516) 864-7630

Zetex (Asia) Ltd.  
3510 Metroplaza, Tower 2  
Hing Fong Road, Kwai Fong  
Telephone: (852) 28100 611  
Fax: (852) 24250 494

These are supported by  
agents and distributors in  
major countries world-wide  
©Zetex plc 1995

This publication is issued to provide outline information only which (unless agreed by the Company in writing) may not be used, applied or reproduced for any purpose or form part of any order or contract or be regarded as a representation relating to the products or services concerned. The Company reserves the right to alter without notice the specification, design, price or conditions of supply of any product or service.


# ZTX1053A

## ELECTRICAL CHARACTERISTICS (at $T_{amb} = 25^{\circ}\text{C}$ unless otherwise stated).


| PARAMETER                             | SYMBOL        | MIN.              | TYP.              | MAX.             | UNIT | CONDITIONS.                                                                                                                                                             |
|---------------------------------------|---------------|-------------------|-------------------|------------------|------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Collector-Base Breakdown Voltage      | $V_{(BR)CBO}$ | 150               | 245               |                  | V    | $I_C=100\mu\text{A}$                                                                                                                                                    |
| Collector-Emitter Breakdown Voltage   | $V_{CES}$     | 150               | 245               |                  | V    | $I_C=100\mu\text{A}$                                                                                                                                                    |
| Collector-Emitter Breakdown Voltage   | $V_{CEO}$     | 75                | 100               |                  | V    | $I_C=10\text{mA}$                                                                                                                                                       |
| Collector-Emitter Breakdown Voltage   | $V_{CEV}$     | 150               | 245               |                  | V    | $I_C=100\mu\text{A}$ , $V_{EB}=1\text{V}$                                                                                                                               |
| Emitter-Base Breakdown Voltage        | $V_{(BR)EBO}$ | 5                 | 8.8               |                  | V    | $I_E=100\mu\text{A}$                                                                                                                                                    |
| Collector Cut-Off Current             | $I_{CBO}$     |                   | 0.3               | 10               | nA   | $V_{CB}=120\text{V}$                                                                                                                                                    |
| Emitter Cut-Off Current               | $I_{EBO}$     |                   | 0.3               | 10               | nA   | $V_{EB}=4\text{V}$                                                                                                                                                      |
| Collector Emitter Cut-Off Current     | $I_{CES}$     |                   | 0.3               | 10               | nA   | $V_{CES}=120\text{V}$                                                                                                                                                   |
| Collector-Emitter Saturation Voltage  | $V_{CE(sat)}$ |                   | 17<br>120<br>180  | 25<br>150<br>250 | mV   | $I_C=0.2\text{A}$ , $I_B=20\text{mA}^*$<br>$I_C=1\text{A}$ , $I_B=10\text{mA}^*$<br>$I_C=3\text{A}$ , $I_B=100\text{mA}^*$                                              |
| Base-Emitter Saturation Voltage       | $V_{BE(sat)}$ |                   | 900               | 1000             | mV   | $I_C=3\text{A}$ , $I_B=100\text{mA}^*$                                                                                                                                  |
| Base-Emitter Turn-On Voltage          | $V_{BE(on)}$  |                   | 825               | 950              | mV   | $I_C=3\text{A}$ , $V_{CE}=2\text{V}^*$                                                                                                                                  |
| Static Forward Current Transfer Ratio | hFE           | 260<br>300<br>100 | 420<br>450<br>150 | 1200             |      | $I_C=10\text{mA}$ , $V_{CE}=2\text{V}^*$<br>$I_C=1\text{A}$ , $V_{CE}=2\text{V}^*$<br>$I_C=3\text{A}$ , $V_{CE}=2\text{V}^*$<br>$I_C=10\text{A}$ , $V_{CE}=2\text{V}^*$ |
| Transition Frequency                  | $f_T$         |                   | 140               |                  | MHz  | $I_C=50\text{mA}$ , $V_{CE}=10\text{V}$<br>$f=100\text{MHz}$                                                                                                            |
| Output Capacitance                    | $C_{obo}$     |                   | 21                | 30               | pF   | $V_{CB}=10\text{V}$ , $f=1\text{MHz}$                                                                                                                                   |
| Switching Times                       | $t_{on}$      |                   | 90                |                  | ns   | $I_C=2\text{A}$ , $I_B=20\text{mA}$ , $V_{CC}=50\text{V}$                                                                                                               |
|                                       | $t_{off}$     |                   | 750               |                  | ns   | $I_C=2\text{A}$ , $I_B=\pm 20\text{mA}$ , $V_{CC}=50\text{V}$                                                                                                           |

\*Measured under pulsed conditions. Pulse width=300 $\mu\text{s}$ . Duty cycle  $\leq 2\%$


## TYPICAL

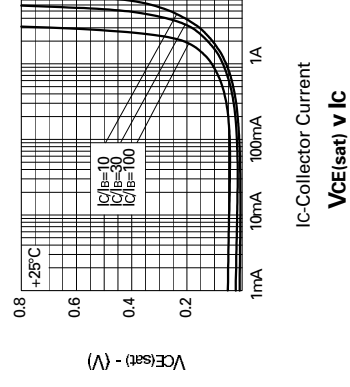

IC-Collector Current  
 $V_{CE(sat)}$  v  $I_C$

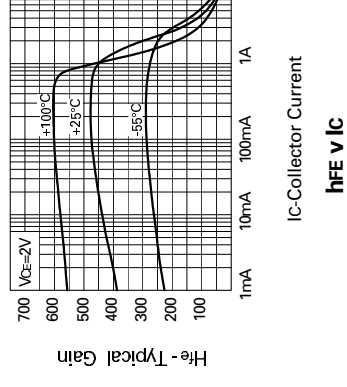

IC-Collector Current  
hFE v  $I_C$

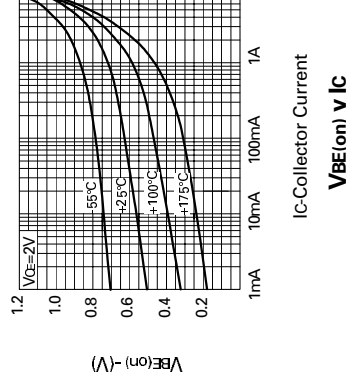

IC-Collector Current  
 $V_{BE(on)}$  v  $I_C$




# ZTX1053A

## ELECTRICAL CHARACTERISTICS (at $T_{amb} = 25^{\circ}\text{C}$ unless otherwise stated).

| PARAMETER                             | SYMBOL        | MIN.              | TYP.              | MAX.             | UNIT | CONDITIONS.                                                                                                                                                             |
|---------------------------------------|---------------|-------------------|-------------------|------------------|------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Collector-Base Breakdown Voltage      | $V_{(BR)CBO}$ | 150               | 245               |                  | V    | $I_C=100\mu\text{A}$                                                                                                                                                    |
| Collector-Emitter Breakdown Voltage   | $V_{CES}$     | 150               | 245               |                  | V    | $I_C=100\mu\text{A}$                                                                                                                                                    |
| Collector-Emitter Breakdown Voltage   | $V_{CEO}$     | 75                | 100               |                  | V    | $I_C=10\text{mA}$                                                                                                                                                       |
| Collector-Emitter Breakdown Voltage   | $V_{CEV}$     | 150               | 245               |                  | V    | $I_C=100\mu\text{A}$ , $V_{EB}=1\text{V}$                                                                                                                               |
| Emitter-Base Breakdown Voltage        | $V_{(BR)EBO}$ | 5                 | 8.8               |                  | V    | $I_E=100\mu\text{A}$                                                                                                                                                    |
| Collector Cut-Off Current             | $I_{CBO}$     |                   | 0.3               | 10               | nA   | $V_{CB}=120\text{V}$                                                                                                                                                    |
| Emitter Cut-Off Current               | $I_{EBO}$     |                   | 0.3               | 10               | nA   | $V_{EB}=4\text{V}$                                                                                                                                                      |
| Collector Emitter Cut-Off Current     | $I_{CES}$     |                   | 0.3               | 10               | nA   | $V_{CES}=120\text{V}$                                                                                                                                                   |
| Collector-Emitter Saturation Voltage  | $V_{CE(sat)}$ |                   | 17<br>120<br>180  | 25<br>150<br>250 | mV   | $I_C=0.2\text{A}$ , $I_B=20\text{mA}^*$<br>$I_C=1\text{A}$ , $I_B=10\text{mA}^*$<br>$I_C=3\text{A}$ , $I_B=100\text{mA}^*$                                              |
| Base-Emitter Saturation Voltage       | $V_{BE(sat)}$ |                   | 900               | 1000             | mV   | $I_C=3\text{A}$ , $I_B=100\text{mA}^*$                                                                                                                                  |
| Base-Emitter Turn-On Voltage          | $V_{BE(on)}$  |                   | 825               | 950              | mV   | $I_C=3\text{A}$ , $V_{CE}=2\text{V}^*$                                                                                                                                  |
| Static Forward Current Transfer Ratio | hFE           | 260<br>300<br>100 | 420<br>450<br>150 | 1200             |      | $I_C=10\text{mA}$ , $V_{CE}=2\text{V}^*$<br>$I_C=1\text{A}$ , $V_{CE}=2\text{V}^*$<br>$I_C=3\text{A}$ , $V_{CE}=2\text{V}^*$<br>$I_C=10\text{A}$ , $V_{CE}=2\text{V}^*$ |
| Transition Frequency                  | $f_T$         |                   | 140               |                  | MHz  | $I_C=50\text{mA}$ , $V_{CE}=10\text{V}$<br>$f=100\text{MHz}$                                                                                                            |
| Output Capacitance                    | $C_{obo}$     |                   | 21                | 30               | pF   | $V_{CB}=10\text{V}$ , $f=1\text{MHz}$                                                                                                                                   |
| Switching Times                       | $t_{on}$      |                   | 90                |                  | ns   | $I_C=2\text{A}$ , $I_B=20\text{mA}$ , $V_{CC}=50\text{V}$                                                                                                               |
|                                       | $t_{off}$     |                   | 750               |                  | ns   | $I_C=2\text{A}$ , $I_B=\pm 20\text{mA}$ , $V_{CC}=50\text{V}$                                                                                                           |

\*Measured under pulsed conditions. Pulse width=300 $\mu\text{s}$ . Duty cycle  $\leq 2\%$

## TYPICAL

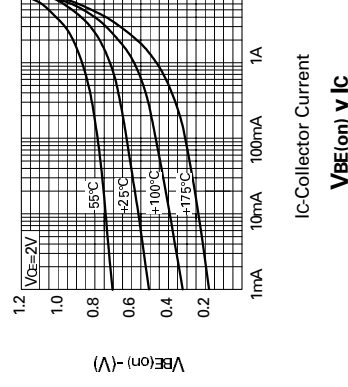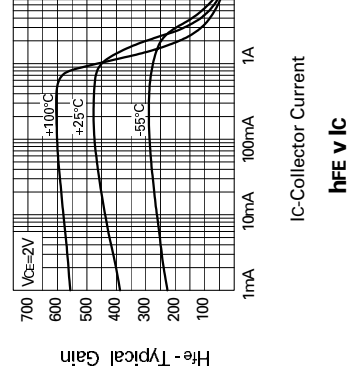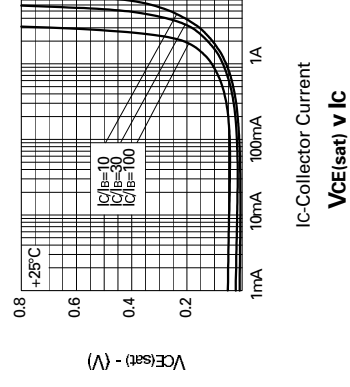

# ZTX1053A

## NPN SILICON PLANAR ME HIGH GAIN TRANSISTOR


ISSUE 3-JANUARY 1995

### FEATURES


- \*  $V_{CE0}=75V$
  - \* 3 Amp Continuous Current
  - \* 10 Amp Pulse Current
  - \* Very Low Saturation Voltage
- APPLICATIONS
- \* Automotive Switching Circuits
  - \* DC-DC Convertors

### ABSOLUTE MAXIMUM RATINGS

| PARAMETER                                  |
|--------------------------------------------|
| Collector-Base Voltage                     |
| Collector-Emitter Voltage                  |
| Emitter-Base Voltage                       |
| Peak Pulse Current                         |
| Continuous Collector Current               |
| Base Current                               |
| Power Dissipation at $T_{amb}=25^{\circ}C$ |
| Operating and Storage Temperature Range    |

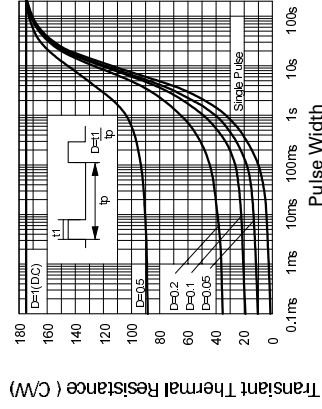

**Transient Thermal Resistance**

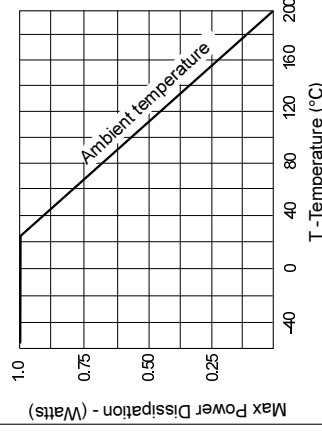

**Derating curve**

### SPICE PARAMETERS

\* ZETEX ZTX1053A Spice model Last revision 19/01/95

- ```

* .MODEL ZTX1053A NPN IS=2.1E-12 NF=1.0 BF=600 IKF=2.2 VAF=100
+   |SE=0.9E-13 NE=1.25 NR=0.99 BR=150 IKR=2.5 VAR=15
+   |SC=5.0E-10 NC=1.76 RB=0.1 RE=0.028 RC=0.016
+   |CJC=75.1E-12 CJE=520E-12 MJC=0.415 MJE=0.367
+   |VJC=0.512 VJE=0.766 TF=550E-12 TR=22E-9
*

```

### © 1995 ZETEX PLC

The copyright in this model and the design embodied belong to Zetex PLC ("Zetex"). It is supplied free of charge by Zetex for the purpose of research and design and may be used or copied intact (including this notice) for that purpose only. All other rights are reserved. The model is believed accurate but no condition or warranty as to its merchantability or fitness for purpose is given and no liability in respect of any use is accepted by Zetex PLC, its distributors or agents.



Zetex plc.  
Fields New Road, Chadderton, Oldham, OL9 8NP, United Kingdom.  
Telephone: (44)161-627 5105 (Sales), (44)161-627 4963 (General Enquiries)  
Facsimile: (44)161-627 5467

Zetex GmbH  
Sreitelstraße 19  
D-81673 München  
Telefon: (49) 89 45 49 49 0  
Fax: (49) 89 45 49 49 49

Zetex Inc.  
87 Modular Avenue  
Commack NY11725  
Telephone: (516) 543-7100  
Fax: (516) 864-7630



Zetex (Asia) Ltd.  
3510 Metroplaza, Tower 2  
Hing Fong Road, Kwai Fong  
Telephone: (852) 28100 611  
Fax: (852) 24250 494

These are supported by  
agents and distributors in  
major countries world-wide  
© Zetex plc 1995

This publication is issued to provide outline information only which (unless agreed by the Company in writing) may not be used, applied or reproduced for any purpose or form part of any order or contract or be regarded as a representation relating to the products or services concerned. The Company reserves the right to alter without notice the specification, design, price or conditions of supply of any product or service.

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View ZTX1053A on WIN SOURCE](#)
-  [Diodes Incorporated Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management