

SOT89 N-CHANNEL ENHANCEMENT MODE VERTICAL DMOS FET

ZVN4424Z


ISSUE 1 - NOVEMBER 1998

FEATURES

- * 240 Volt V_{DS}
- * Extremely low $R_{DS(on)}=4.3\Omega$
- * Low threshold and Fast switching

APPLICATIONS

- * Earth recall and dialling switches
- * Electronic hook switches
- * Battery powered equipment
- * Telecoms and high voltage dc-dc convertors



PARTMARKING DETAILS - N24
COMPLEMENTARY TYPE - ZVP4424Z

ABSOLUTE MAXIMUM RATINGS.

PARAMETER	SYMBOL	VALUE	UNIT
Drain-Source Voltage	V_{DS}	240	V
Continuous Drain Current at $T_{amb}=25^{\circ}C$	I_D	300	mA
Pulsed Drain Current	I_{DM}	1.0	A
Gate Source Voltage	V_{GS}	± 40	V
Power Dissipation at $T_{amb}=25^{\circ}C$	P_{tot}	1 †	W
Operating and Storage Temperature Range	T_j, T_{stg}	-55 to +150	$^{\circ}C$

† recommended P_{tot} calculated using FR4 measuring 15x15x0.6mm
Refer to the handling instructions for soldering surface mount components.

ZVN4424Z

ELECTRICAL CHARACTERISTICS (at $T_{amb} = 25^{\circ}\text{C}$ unless otherwise stated).


PARAMETER	SYMBOL	MIN.	TYP	MAX.	UNIT	CONDITIONS.
Drain-Source Breakdown Voltage	BV_{DSS}	240			V	$I_D=1\text{mA}, V_{GS}=0\text{V}$
Gate-Source Threshold Voltage	$V_{GS(th)}$	0.8	1.3	1.8	V	$I_D=1\text{mA}, V_{DS}=V_{GS}$
Gate-Body Leakage	I_{GSS}			100	nA	$V_{GS}=\pm 40\text{V}, V_{DS}=0\text{V}$
On State Drain-Current	$I_{D(on)}$	0.8	1.4		A	$V_{DS}=10\text{V}, V_{GS}=10\text{V}$
Zero Gate Voltage Drain Current	I_{DSS}			10 100	μA μA	$V_{DS}=240\text{V}, V_{GS}=0\text{V}$ $V_{DS}=190\text{V}, V_{GS}=0\text{V}, T=125^{\circ}\text{C}$
Static Drain-Source On-State Resistance	$R_{DS(on)}$		4 4.3	5.5 6	Ω Ω	$V_{GS}=10\text{V}, I_D=500\text{mA}^*$ $V_{GS}=2.5\text{V}, I_D=100\text{mA}^*$
Forward Transconductance (1) (2)	g_{fs}	0.4	0.75		S	$V_{DS}=10\text{V}, I_D=0.5\text{A}$
Input Capacitance (2)	C_{iss}		110	200	pF	
Common Source Output Capacitance (2)	C_{oss}		15	25	pF	$V_{DS}=25\text{V}, V_{GS}=0\text{V}, f=1\text{MHz}$
Reverse Transfer Capacitance (2)	C_{rss}		3.5	15	pF	
Turn-On Delay Time (2)(3)	$t_{d(on)}$		2.5	5	ns	$V_{DD} \approx 50\text{V}, I_D=0.25\text{A}, V_{GEN}=10\text{V}$
Rise Time (2)(3)	t_r		5	8	ns	
Turn-Off Delay Time (2)(3)	$t_{d(off)}$		40	60	ns	
Fall Time (2)(3)	t_f		16	25	ns	

(1) Measured under pulsed conditions. Width=300 μs . Duty cycle $\leq 2\%$

(2) Sample test.







(3) Switching times measured with 50 Ω source impedance and <5ns rise time on a pulse generator
Spice parameter data is available upon request for this device

TYPICAL CHARACTERISTICS

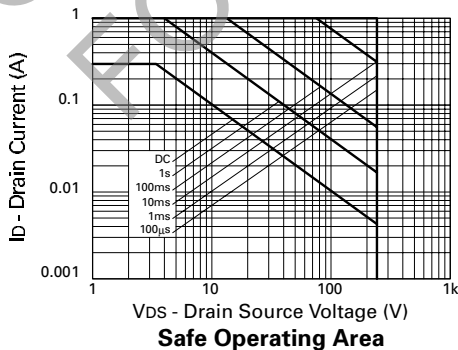



ZVN4424Z

TYPICAL CHARACTERISTICS

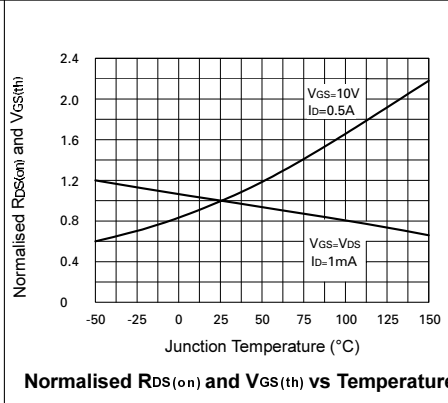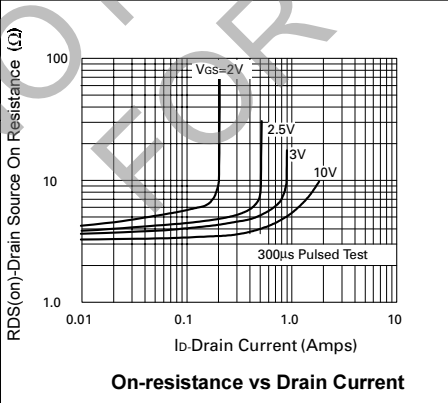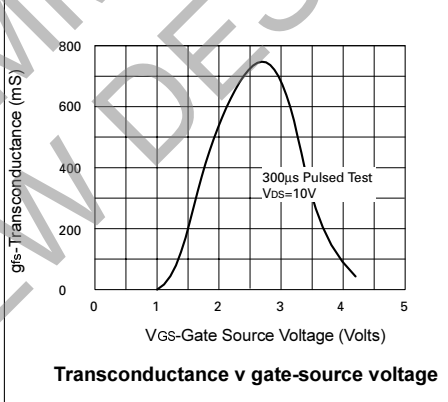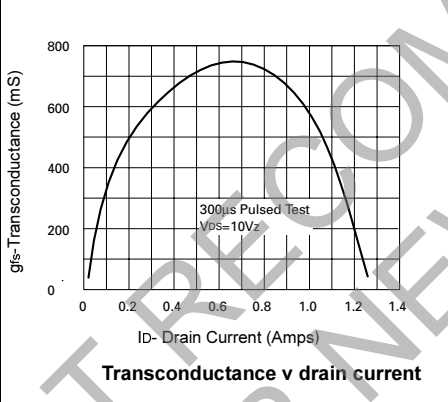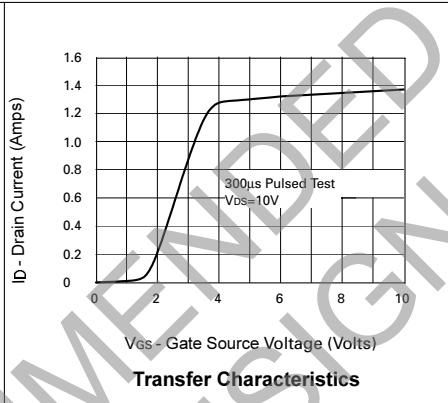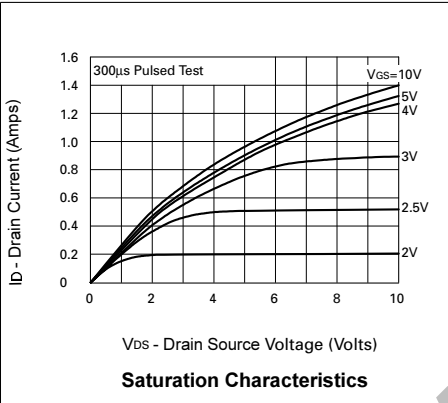

ZVN4424Z

TYPICAL CHARACTERISTICS

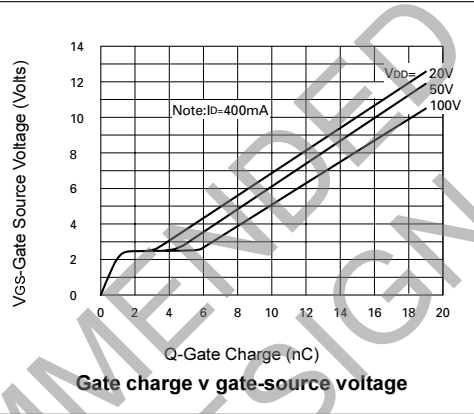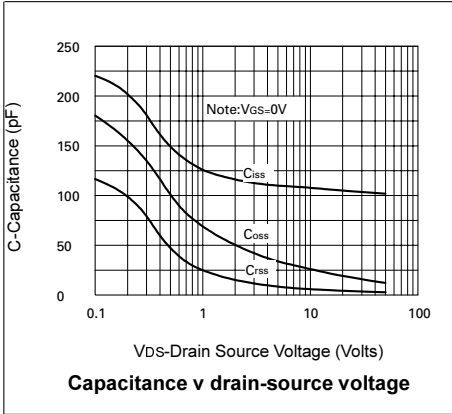







NOT RECOMMENDED FOR NEW DESIGN

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  View [ZVN4424ZTA](#) on WIN SOURCE
-  [Diodes Incorporated](#) Information

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management