




THE DATASHEET OF
4964-SS-120



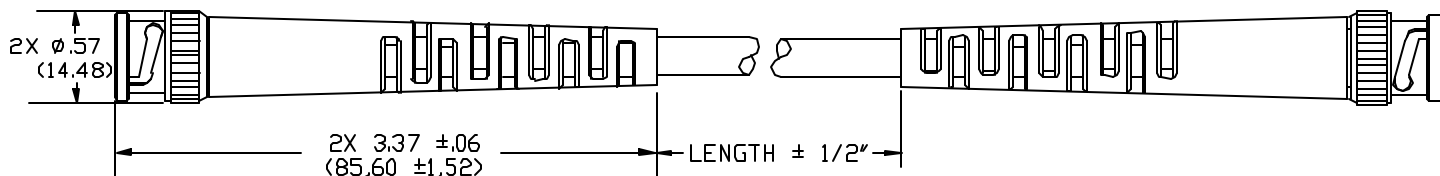

FEATURES:

- Uses a special low-triboelectric cable which has noise attenuating layers surrounding the center conductor.
- The cable is ideal for low power, low frequency measurements.

MATERIALS:

Body: Brass, Tarnish Resistant Plating, Center Contact: Gold Plated Brass

Dielectric: PTFE

Strain Relief: PVC molded directly to cable and connectors

Cable: 22 AWG, stranding 7 x 30 t.c., PVC insulated, 4.95 (.195) O.D.

Marking: "Pomona 4964-SS"

RATINGS:

Voltage: Shield/Earth: 30VAC/60VDC Max.

Inner Conductor/Shield: 500VRMS Max.

Operating Temperature: +50°C. (+122°F.) Max.

Nominal Impedance: 50 Ohms

Recommended Frequency Range: DC to 10KHz



ORDERING INFORMATION: Model 4964-SS-*

*- Standard Lengths: 12, 24, 26, 48, 60, 96, 120, 144, 180, 240, 300, 360 – Lengths other than those specified are available on special request.

All dimensions are in inches and metric. All specifications are to the latest revisions. Specifications are subject to change without notice.
Registered trademarks are the property of their respective companies. Made in USA

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View 4964-SS-120 on WIN SOURCE](#)
-  [Pomona Electronics Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management