

2SC1573, 2SC1573A, 2SC1573B

Silicon NPN triple diffusion planar type

For high breakdown voltage general amplification

For small TV video output


Complementary to 2SC1573 and 2SA0879

■ Features

- High collector-emitter voltage (Base open) V_{CE0}
- High transition frequency f_T

■ Absolute Maximum Ratings $T_a = 25^\circ\text{C}$

Parameter	Symbol	Rating	Unit
Collector-base voltage (Emitter open)	2SC1573	250	V
	2SC1573A	300	
	2SC1573B	400	
Collector-emitter voltage (Base open)	2SC1573	200	V
	2SC1573A	300	
	2SC1573B	400	
Emitter-base voltage (Collector open)	2SC1573	5	V
	2SC1573A	7	
	2SC1573B		
Collector current	I_C	70	mA
Peak collector current	I_{CP}	100	mA
Collector power dissipation	P_C	1	W
Junction temperature	T_j	150	$^\circ\text{C}$
Storage temperature	T_{stg}	-55 to +150	$^\circ\text{C}$

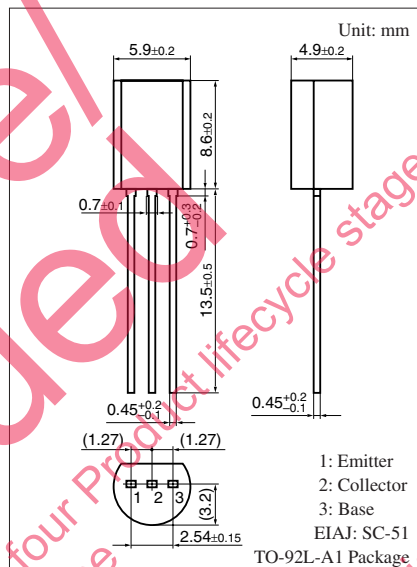

Unit: mm
 1: Emitter
 2: Collector
 3: Base
 EIAJ: SC-51
 TO-92L-A1 Package




■ Electrical Characteristics $T_a = 25^\circ\text{C} \pm 3^\circ\text{C}$










Parameter		Symbol	Conditions	Min	Typ	Max	Unit
Collector-emitter voltage (Base open)	2SC1573	V_{CEO}	$I_C = 100 \mu\text{A}, I_B = 0$	200			V
	2SC1573A			300			
	2SC1573B			400			
Emitter-base voltage (Collector open)	2SC1573	V_{EBO}	$I_E = 1 \mu\text{A}, I_C = 0$	5			V
	2SC1573A			7			
	2SC1573B			7			
Collector-base cut-off current (Emitter open)	2SC1573	I_{CBO}	$V_{CB} = 12 \text{ V}, I_E = 0$			2	μA
	2SC1573A						
	2SC1573B		$V_{CB} = 200 \text{ V}, I_E = 0$			10	
Forward current transfer ratio	2SC1573	h_{FE}^*	$V_{CE} = 10 \text{ V}, I_C = 5 \text{ mA}$	60		220	—
	2SC1573A			30		220	
	2SC1573B						
Collector-emitter saturation voltage		$V_{CE(sat)}$	$I_C = 50 \text{ mA}, I_B = 5 \text{ mA}$			1.2	V
Transition frequency		f_T	$V_{CB} = 10 \text{ V}, I_E = -10 \text{ mA}, f = 200 \text{ MHz}$	50	80		MHz
Collector output capacitance (Common base, input open circuited)	2SC1573	C_{ob}	$V_{CB} = 10 \text{ V}, I_E = 0, f = 1 \text{ MHz}$		5	10	pF
	2SC1573A				4	8	
	2SC1573B				4	8	

Note) 1. Measuring methods are based on JAPANESE INDUSTRIAL STANDARD JIS C 7030 measuring methods for transistors.

2. *: Rank classification (2SC1573 for ranks Q and R only)

Rank	P	Q	R
h_{FE}	30 to 100	60 to 150	100 to 220

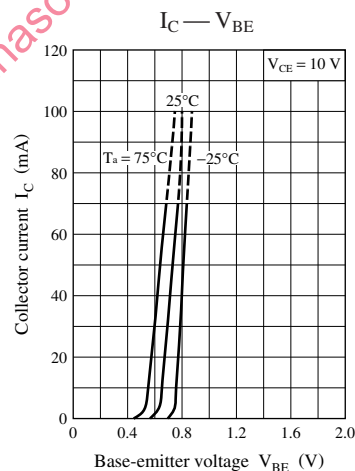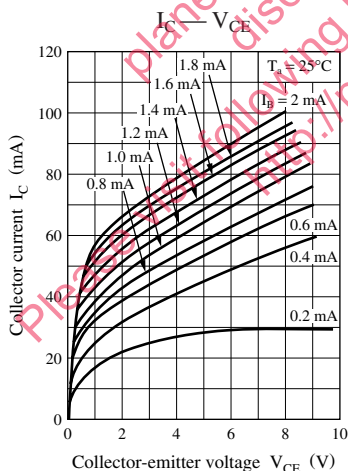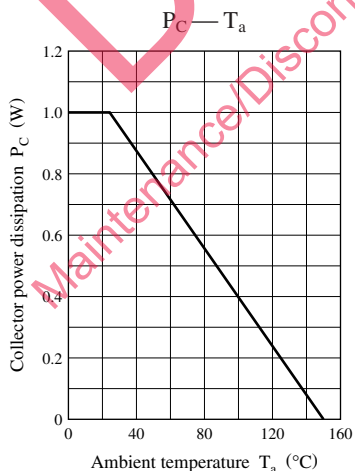

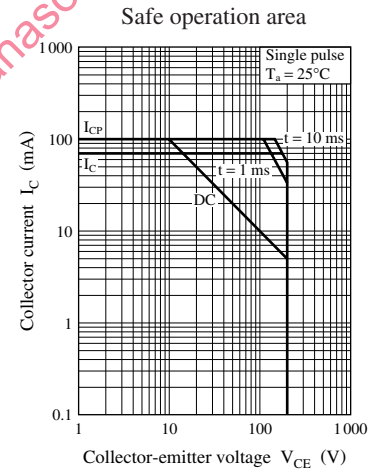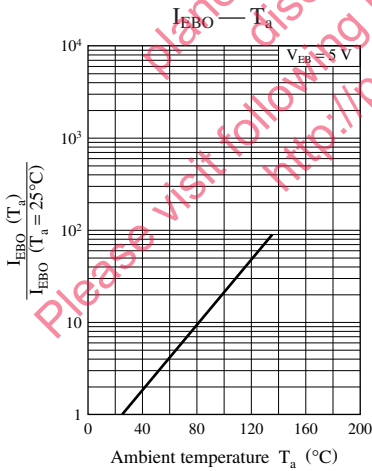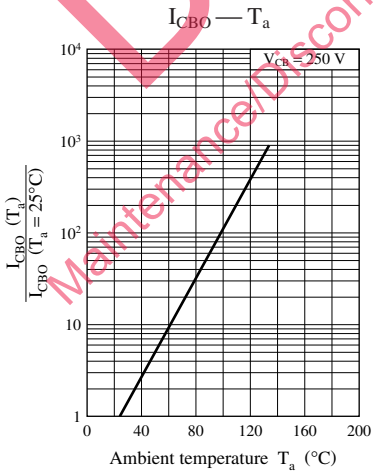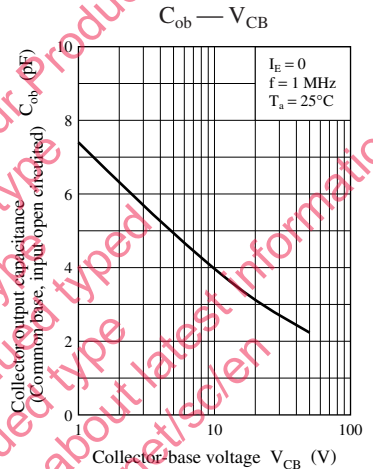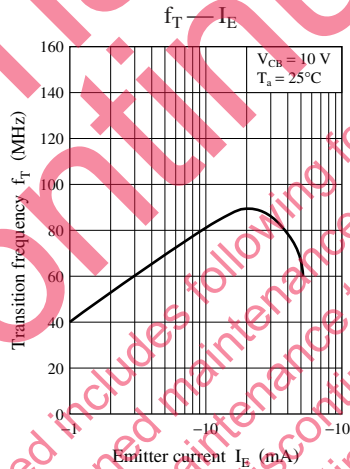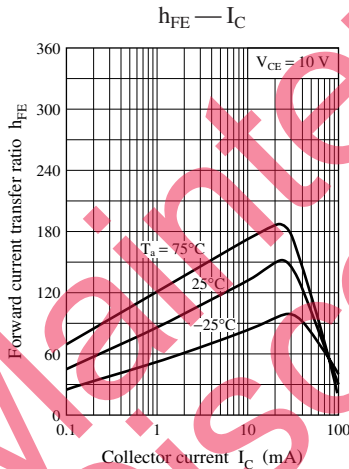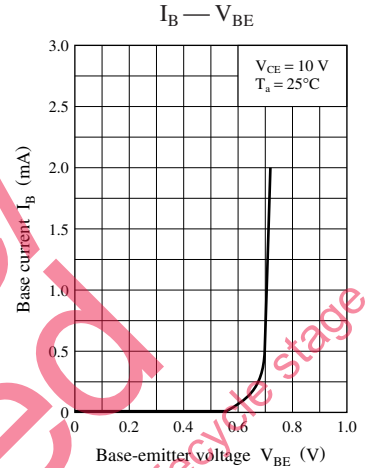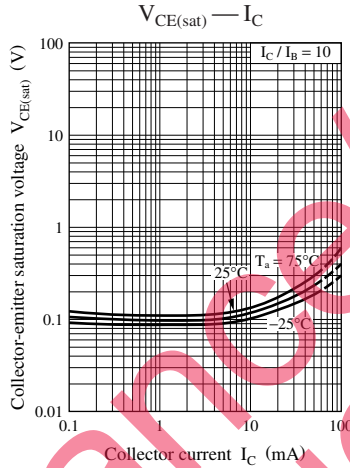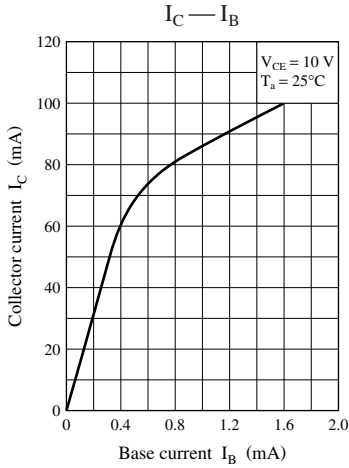

utions in using the technical information and scribed in this book

s book is to be exported or provided to non-residents, the laws and
rd to security export control, must be observed.

ly to show the main characteristics and application circuit examples
l property right or other right owned by our company or any other
any as to the infringement upon any such right owned by any other
rmation described in this book.

standard applications or general electronic equipment (such as office
and household appliances).

ng applications:

biles, traffic control equipment, combustion equipment, life support
reliability are required, or if the failure or malfunction of the prod-

ct are subject to change without notice for modification and/or im-
use of the products, therefore, ask for the most up-to-date Product
atisfy your requirements.

bsolute maximum rating and the guaranteed operating conditions
(.). Especially, please be careful not to exceed the range of absolute
er-off and mode-switching. Otherwise, we will not be liable for any

take into the consideration of incidence of break down and failure
n the systems such as redundant design, arresting the spread of fire
al injury, fire, social damages, for example, by using the products.

own and characteristics change due to external factors (ESD, EOS,
mounting or at customer's process. When using products for which
shelf life and the elapsed time since first opening the packages

ly or partially, without the prior written permission of Matsushita

Copyright © 2014 Panasonic Product Recycling Stage.
This document is a preliminary draft for internal use only.
It is not intended for distribution outside the company.
All rights reserved. No part of this document may be reproduced, stored in a retrieval system, or transmitted in any form or by any means, electronic, mechanical, photocopying, recording, or by any information storage and retrieval system, without the prior written permission of Matsushita.
For more information, please visit the following URL:
<http://panasonic.net/sc/en>

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View 2SC15730Q on WIN SOURCE](#)

 [Panasonic Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management