



**THE DATASHEET OF
SI8467DB-T2-E1**



P-Channel 20 V (D-S) MOSFET

PRODUCT SUMMARY			
V_{DS} (V)	$R_{DS(on)}$ (Ω)	I_D (A) ^{a, e}	Q_g (Typ.)
- 20	0.073 at $V_{GS} = - 4.5$ V	- 3.4	6.9 nC
	0.125 at $V_{GS} = - 2.5$ V	- 2.6	

FEATURES

- Halogen-free According to IEC 61249-2-21 Definition
- TrenchFET[®] Power MOSFET
- Ultra-Small 1 mm x 1 mm Maximum Outline
- Ultra-Thin 0.548 mm Maximum Height
- Compliant to RoHS Directive 2002/95/EC




RoHS
COMPLIANT
HALOGEN
FREE


APPLICATIONS

- Load Switches, Battery Switches and Charger Switches in Portable Device Applications
- DC/DC Converters

MICRO FOOT

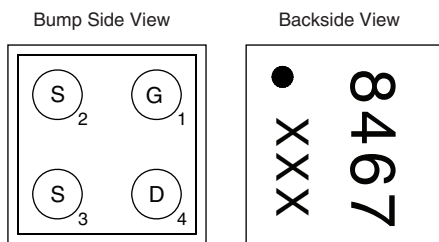

Device Marking: 8467
xxx = Date/Lot Traceability Code



P-Channel MOSFET

Ordering Information: Si8467DB-T2-E1 (Lead (Pb)-free and Halogen-free)

ABSOLUTE MAXIMUM RATINGS $T_A = 25$ °C, unless otherwise noted				
Parameter		Symbol	Limit	Unit
Drain-Source Voltage		V_{DS}	- 20	V
Gate-Source Voltage		V_{GS}	± 12	
Continuous Drain Current ($T_J = 150$ °C)	$T_A = 25$ °C	I_D	- 3.7 ^a	A
	$T_A = 70$ °C		- 2.7 ^a	
	$T_A = 25$ °C		- 2.5 ^b	
	$T_A = 70$ °C		- 2.0 ^b	
Pulsed Drain Current		I_{DM}	- 15	
Continuous Source-Drain Diode Current	$T_C = 25$ °C	I_S	- 1.5 ^a	
	$T_A = 25$ °C		- 0.65 ^b	
Maximum Power Dissipation	$T_A = 25$ °C	P_D	1.8 ^a	W
	$T_A = 70$ °C		1.1 ^a	
	$T_A = 25$ °C		0.78 ^b	
	$T_A = 70$ °C		0.5 ^b	
Operating Junction and Storage Temperature Range		T_J, T_{stg}	- 55 to 150	
Package Reflow Conditions ^c	VPR		260	°C
	IR/Convection		260	

Notes:

- Surface mounted on 1" x 1" FR4 board with full copper, $t = 10$ s.
- Surface mounted on 1" x 1" FR4 board with minimum copper, $t = 10$ s.
- Refer to IPC/JEDEC (J-STD-020C), no manual or hand soldering.
- In this document, any reference to case represents the body of the MICRO FOOT device and foot is the bump.
- Based on $T_A = 25$ °C.

THERMAL RESISTANCE RATINGS

Parameter	Symbol	Typical	Maximum	Unit
Maximum Junction-to-Ambient ^{a, b}	$t = 10 \text{ s}$	55	70	°C/W
Maximum Junction-to-Ambient ^{c, d}	$t = 10 \text{ s}$	125	160	

Notes:

- a. Surface mounted on 1" x 1" FR4 board with full copper.
 b. Maximum under steady state conditions is 100 °C/W.
 c. Surface mounted on 1" x 1" FR4 board with minimum copper.
 d. Maximum under steady state conditions is 190 °C/W.

SPECIFICATIONS $T_J = 25 \text{ °C}$, unless otherwise noted







Parameter	Symbol	Test Conditions	Min.	Typ.	Max.	Unit
Static						
Drain-Source Breakdown Voltage	V_{DS}	$V_{GS} = 0 \text{ V}, I_D = -250 \text{ }\mu\text{A}$	-20			V
V_{DS} Temperature Coefficient	$\Delta V_{DS}/T_J$	$I_D = -250 \text{ }\mu\text{A}$		-13		mV/°C
$V_{GS(th)}$ Temperature Coefficient	$\Delta V_{GS(th)}/T_J$		3.1			
Gate-Source Threshold Voltage	$V_{GS(th)}$	$V_{DS} = V_{GS}, I_D = -250 \text{ }\mu\text{A}$	-0.6		-1.5	V
Gate-Source Leakage	I_{GSS}	$V_{DS} = 0 \text{ V}, V_{GS} = \pm 12 \text{ V}$			± 100	nA
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS} = -20 \text{ V}, V_{GS} = 0 \text{ V}$			-1	μA
		$V_{DS} = -20 \text{ V}, V_{GS} = 0 \text{ V}, T_J = 70 \text{ °C}$			-10	
On-State Drain Current ^a	$I_{D(on)}$	$V_{DS} \leq -5 \text{ V}, V_{GS} = -4.5 \text{ V}$	-10			A
Drain-Source On-State Resistance ^a	$R_{DS(on)}$	$V_{GS} = -4.5 \text{ V}, I_D = -1 \text{ A}$		0.06	0.073	Ω
		$V_{GS} = -2.5 \text{ V}, I_D = -1 \text{ A}$		0.102	0.125	
Forward Transconductance ^a	g_{fs}	$V_{DS} = -10 \text{ V}, I_D = -1 \text{ A}$		6		S
Dynamic^b						
Input Capacitance	C_{iss}	$V_{DS} = -10 \text{ V}, V_{GS} = 0 \text{ V}, f = 1 \text{ MHz}$		475		pF
Output Capacitance	C_{oss}		135			
Reverse Transfer Capacitance	C_{rss}		110			
Total Gate Charge	Q_g	$V_{DS} = -10 \text{ V}, V_{GS} = -10 \text{ V}, I_D = -1 \text{ A}$		14	21	nC
		$V_{DS} = -10 \text{ V}, V_{GS} = -4.5 \text{ V}, I_D = -1 \text{ A}$		6.9	11	
Gate-Source Charge	Q_{gs}	$V_{DS} = -10 \text{ V}, V_{GS} = -4.5 \text{ V}, I_D = -1 \text{ A}$		1		nC
Gate-Drain Charge	Q_{gd}		2.4			
Gate Resistance	R_g	$V_{GS} = -0.1 \text{ V}, f = 1 \text{ MHz}$		6		Ω
Turn-On Delay Time	$t_{d(on)}$	$V_{DD} = -10 \text{ V}, R_L = 10 \text{ }\Omega$ $I_D \cong -1 \text{ A}, V_{GEN} = -4.5 \text{ V}, R_g = 1 \text{ }\Omega$		25	50	ns
Rise Time	t_r		22	45		
Turn-Off Delay Time	$t_{d(off)}$		25	50		
Fall Time	t_f		10	20		
Turn-On Delay Time	$t_{d(on)}$	$V_{DD} = -10 \text{ V}, R_L = 10 \text{ }\Omega$ $I_D \cong -1 \text{ A}, V_{GEN} = -10 \text{ V}, R_g = 1 \text{ }\Omega$		7	15	ns
Rise Time	t_r		10	20		
Turn-Off Delay Time	$t_{d(off)}$		22	45		
Fall Time	t_f		10	20		
Drain-Source Body Diode Characteristics						
Continuous Source-Drain Diode Current	I_S	$T_A = 25 \text{ °C}$			-1.5	A
Pulse Diode Forward Current	I_{SM}				-15	
Body Diode Voltage	V_{SD}	$I_S = -1 \text{ A}, V_{GS} = 0 \text{ V}$		-0.8	-1.2	V
Body Diode Reverse Recovery Time	t_{rr}	$I_F = -1 \text{ A}, di/dt = 100 \text{ A}/\mu\text{s}, T_J = 25 \text{ °C}$		22	40	ns
Body Diode Reverse Recovery Charge	Q_{rr}		10	20	nC	
Reverse Recovery Fall Time	t_a		8		ns	
Reverse Recovery Rise Time	t_b		14			

Notes:


- a. Pulse test; pulse width $\leq 300 \text{ }\mu\text{s}$, duty cycle $\leq 2 \%$.
 b. Guaranteed by design, not subject to production testing.

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.


TYPICAL CHARACTERISTICS 25 °C, unless otherwise noted

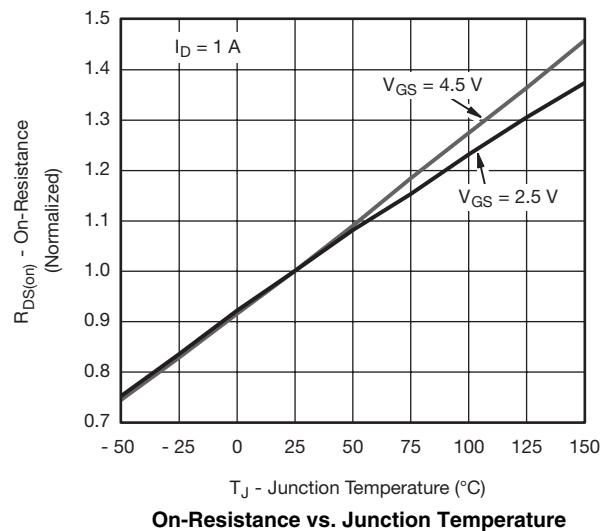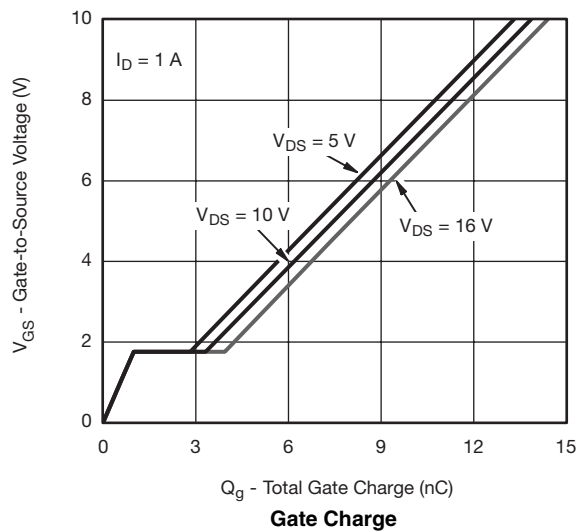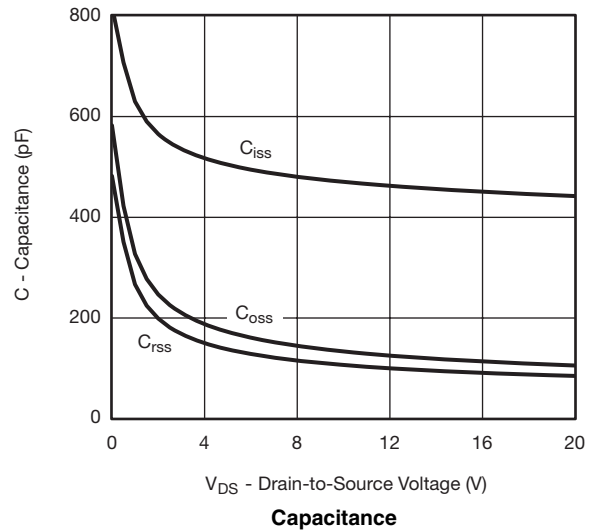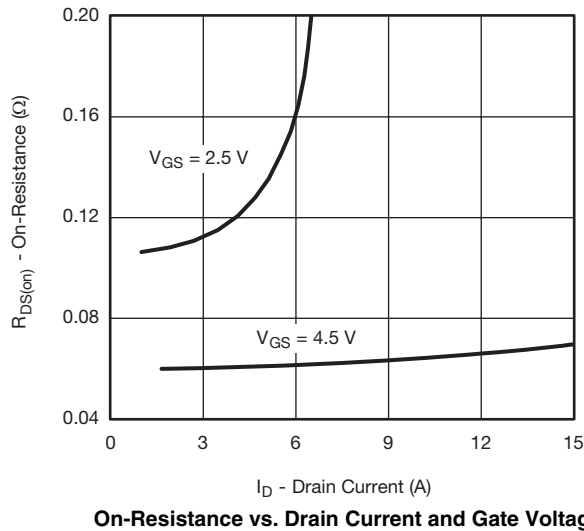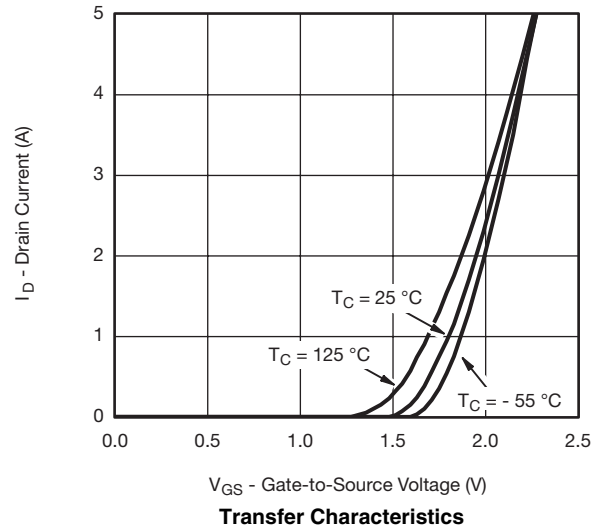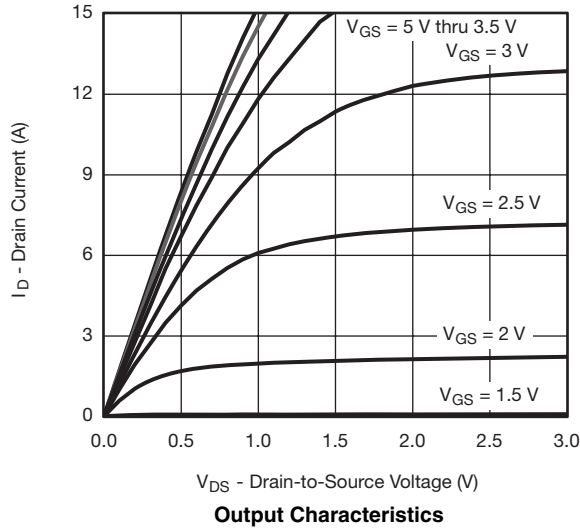


TYPICAL CHARACTERISTICS 25 °C, unless otherwise noted

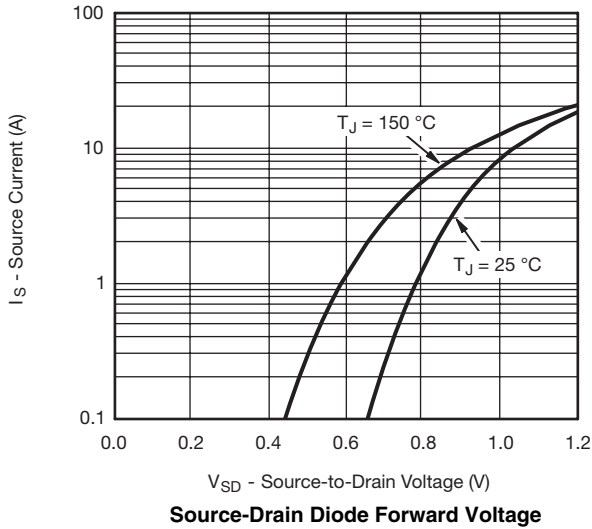


Source-Drain Diode Forward Voltage

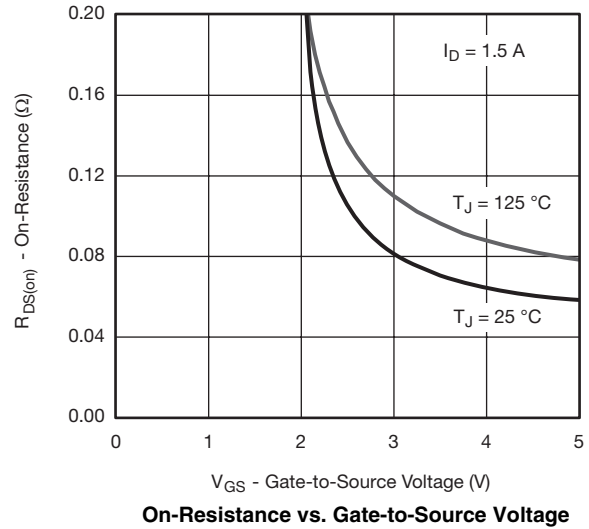


On-Resistance vs. Gate-to-Source Voltage

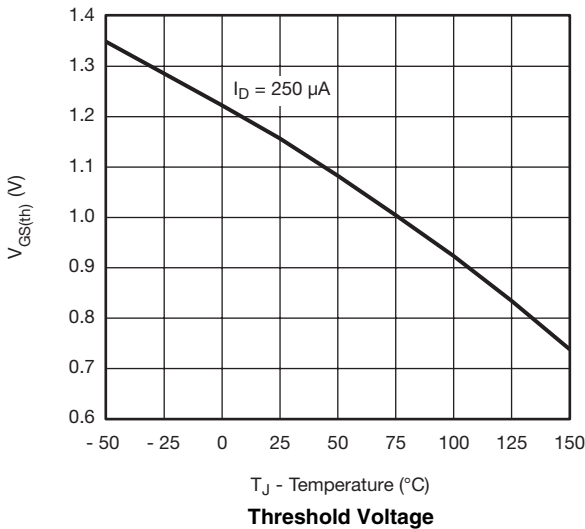

Threshold Voltage

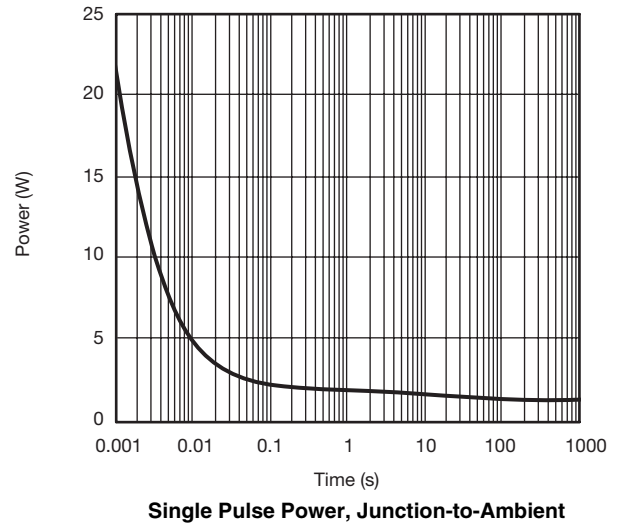



Single Pulse Power, Junction-to-Ambient

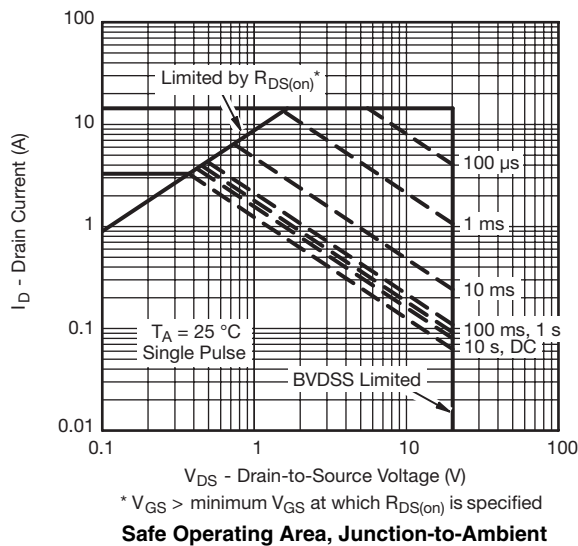

* $V_{GS} >$ minimum V_{GS} at which $R_{DS(on)}$ is specified

Safe Operating Area, Junction-to-Ambient


TYPICAL CHARACTERISTICS 25 °C, unless otherwise noted

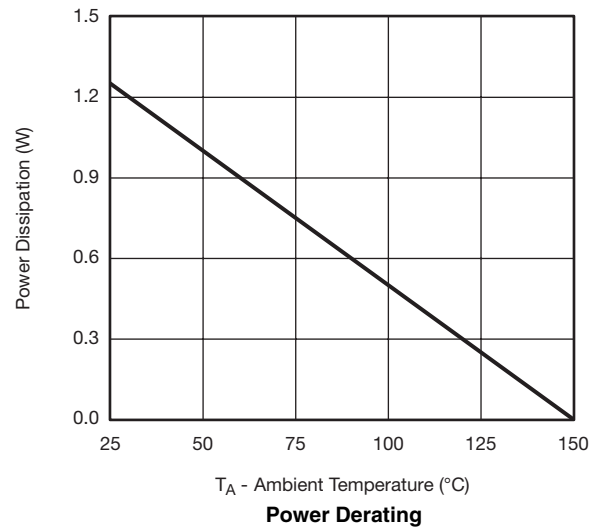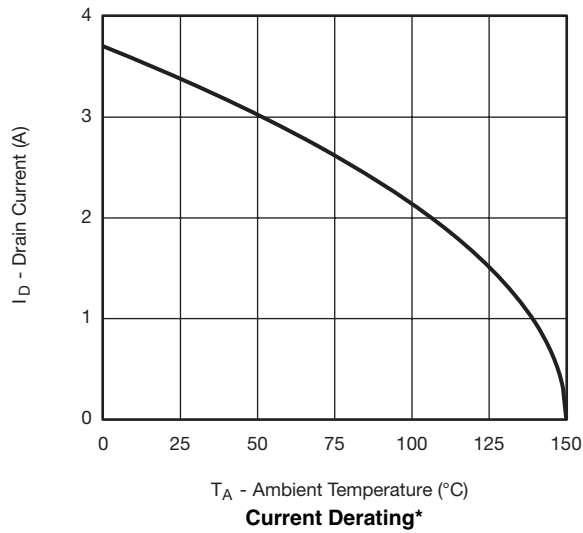


Note:
When mounted on 1" x 1" FR4 with full copper.

* The power dissipation P_D is based on $T_{J(max)} = 150$ °C, using junction-to-case thermal resistance, and is more useful in settling the upper dissipation limit for cases where additional heatsinking is used. It is used to determine the current rating, when this rating falls below the package limit.

TYPICAL CHARACTERISTICS 25 °C, unless otherwise noted

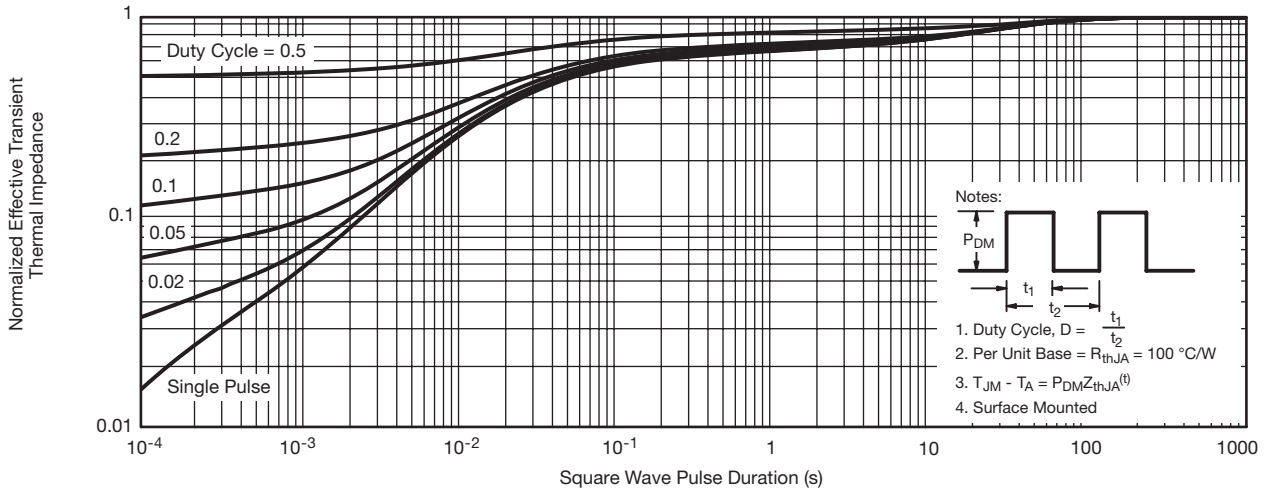


Normalized Thermal Transient Impedance, Junction-to-Ambient (1" x 1" FR4 Board with Full Copper)

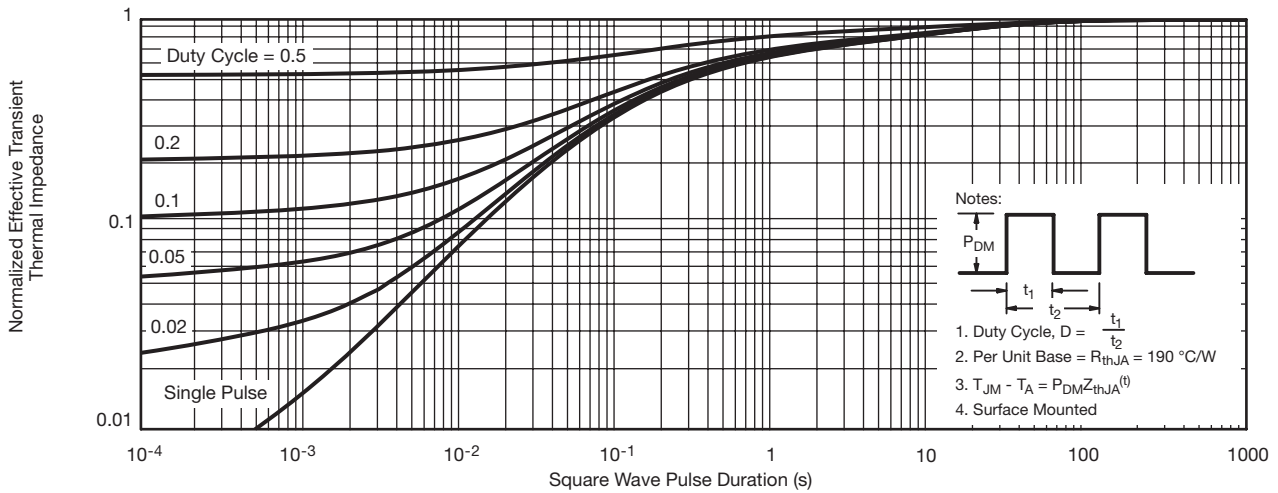

Normalized Thermal Transient Impedance, Junction-to-Ambient (1" x 1" FR4 Board with Minimum Copper)

PACKAGE OUTLINE

MICRO FOOT: 4-BUMP (2 x 2, 0.5 mm PITCH)

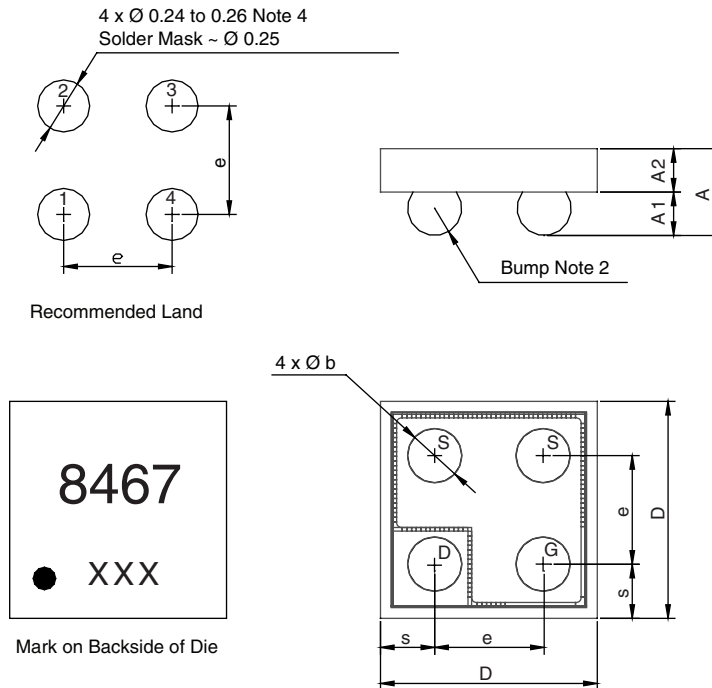

Notes (Unless otherwise specified):

1. All dimensions are in millimeters.
2. Four (4) solder bumps are lead (Pb)-free 95.5Sn/3.8Ag/0.7Cu with diameter \varnothing 0.30 mm to 0.32 mm.
3. Backside surface is coated with a Ti/Ni/Ag layer.
4. Non-solder mask defined copper landing pad.
5. • is location of pin 1.

Dim.	Millimeters ^a			Inches		
	Min.	Nom.	Max.	Min.	Nom.	Max.
A	0.462	0.505	0.548	0.0181	0.0198	0.0215
A₁	0.220	0.250	0.280	0.0086	0.0098	0.0110
A₂	0.242	0.255	0.268	0.0095	0.0100	0.0105
b	0.300	0.310	0.320	0.0118	0.0122	0.0126
e	0.500			0.0197		
s	0.230	0.250	0.270	0.0090	0.0098	0.0106
D	0.920	0.960	1.000	0.0362	0.0378	0.0394

Notes:

- a. Use millimeters as the primary measurement.

Vishay Siliconix maintains worldwide manufacturing capability. Products may be manufactured at one of several qualified locations. Reliability data for Silicon Technology and Package Reliability represent a composite of all qualified locations. For related documents such as package/tape drawings, part marking, and reliability data, see www.vishay.com/ppq?65930.



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View S18467DB-T2-E1 on WIN SOURCE](#)

 [Vishay Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management