

UNR911xG Series

Silicon PNP epitaxial planar type

For digital circuits

■ Features

- Costs can be reduced through downsizing of the equipment and reduction of the number of parts.
- SS-Mini type package, allowing automatic insertion through tape packing.


■ Resistance by Part Number

	Marking Symbol	(R ₁)	(R ₂)
• UNR9110G	6L	47 kΩ	—
• UNR9111G	6A	10 kΩ	10 kΩ
• UNR9112G	6B	22 kΩ	22 kΩ
• UNR9113G	6C	47 kΩ	47 kΩ
• UNR9114G	6D	10 kΩ	47 kΩ
• UNR9115G	6E	10 kΩ	—
• UNR9116G	6F	4.7 kΩ	—
• UNR9117G	6H	22 kΩ	—
• UNR9118G	6I	0.51 kΩ	5.1 kΩ
• UNR9119G	6K	1 kΩ	10 kΩ
• UNR911AG	6X	100 kΩ	100 kΩ
• UNR911BG	6Y	100 kΩ	—
• UNR911CG	6Z	—	47 kΩ
• UNR911DG	6M	47 kΩ	10 kΩ
• UNR911EG	6N	47 kΩ	22 kΩ
• UNR911FG	6O	4.7 kΩ	10 kΩ
• UNR911HG	6P	2.2 kΩ	10 kΩ
• UNR911LG	6Q	4.7 kΩ	4.7 kΩ
• UNR911MG	EI	2.2 kΩ	47 kΩ
• UNR911NG	EW	4.7 kΩ	47 kΩ
• UNR911TG	EY	22 kΩ	47 kΩ
• UNR911VG	FC	2.2 kΩ	2.2 kΩ

■ Package

- Code
SSMini3-F3
- Pin Name
1: Base
2: Emitter
3: Collector

■ Internal Connection



■ Absolute Maximum Ratings T_a = 25°C

Parameter	Symbol	Rating	Unit
Collector-base voltage (Emitter open)	V _{CBO}	-50	V
Collector-emitter voltage (Base open)	V _{CEO}	-50	V
Collector current	I _C	-100	mA
Total power dissipation	P _T	125	mW
Junction temperature	T _j	125	°C
Storage temperature	T _{stg}	-55 to +125	°C

■ Electrical Characteristics $T_a = 25^\circ\text{C} \pm 3^\circ\text{C}$


Parameter		Symbol	Conditions	Min	Typ	Max	Unit
Collector-base voltage (Emitter open)		V_{CBO}	$I_C = -10 \mu\text{A}, I_E = 0$	-50			V
Collector-emitter voltage (Base open)		V_{CEO}	$I_C = -2 \text{mA}, I_B = 0$	-50			V
Collector-base cutoff current (Emitter open)		I_{CBO}	$V_{CB} = -50 \text{V}, I_E = 0$			-0.1	μA
Collector-base cutoff current (Emitter open)		I_{CEO}	$V_{CE} = -50 \text{V}, I_B = 0$			-0.5	μA
Emitter-base cutoff current (Collector open)	UNR9110G/9115G/ 9116G/9117G/911BG	I_{EBO}	$V_{EB} = -6 \text{V}, I_C = 0$			-0.01	mA
	UNR9113G/911AG					-0.1	
	UNR9112G/9114G/911DG/ 911EG/911MG/911NG/911TG					-0.2	
	UNR9111G					-0.5	
	UNR911FG/911HG					-1.0	
	UNR9119G					-1.5	
	UNR9118G/911CG/911LG/911VG					-2.0	
Forward current transfer ratio	UNR911VG	h_{FE}	$V_{CE} = -10 \text{V}, I_C = -5 \text{mA}$	6		20	—
	UNR9118G/911LG			20			
	UNR9119G/911DG/911FG/911HG			30			
	UNR9111G			35			
	UNR9112G/911EG			60			
	UNR9113G/9114G/ 911AG/911CG/911MG			80			
	UNR911NG/911TG			80	400		
	UNR9110G/9115G/ 9116G/9117G/911BG			160	460		
Collector-emitter saturation voltage		$V_{CE(sat)}$	$I_C = -10 \text{mA}, I_B = -0.3 \text{mA}$			-0.25	V
	UNR911VG					$I_C = -10 \text{mA}, I_B = -1.5 \text{mA}$	
Output voltage high-level		V_{OH}	$V_{CC} = -5 \text{V}, V_B = -0.5 \text{V}, R_L = 1 \text{k}\Omega$	-4.9			V
Output voltage low-level		V_{OL}	$V_{CC} = -5 \text{V}, V_B = -2.5 \text{V}, R_L = 1 \text{k}\Omega$			-0.2	V
			$V_{CC} = -5 \text{V}, V_B = -3.5 \text{V}, R_L = 1 \text{k}\Omega$				
			$V_{CC} = -5 \text{V}, V_B = -10 \text{V}, R_L = 1 \text{k}\Omega$				
			$V_{CC} = -5 \text{V}, V_B = -6 \text{V}, R_L = 1 \text{k}\Omega$				
			$V_{CC} = -5 \text{V}, V_B = -5 \text{V}, R_L = 1 \text{k}\Omega$				
Transition frequency		f_T	$V_{CB} = -10 \text{V}, I_E = 1 \text{mA}, f = 200 \text{MHz}$		80		MHz
	UNR9113G		$V_{CB} = -10 \text{V}, I_E = 1 \text{mA}, f = 200 \text{MHz}$		150		
	UNR911AG		$V_{CB} = -10 \text{V}, I_E = 2 \text{mA}, f = 200 \text{MHz}$		80		
	UNR911CG		$V_{CB} = -10 \text{V}, I_E = 2 \text{mA}, f = 200 \text{MHz}$		150		
Input resistance	UNR9118G	R_1		-30%	0.51	+30%	k Ω
	UNR9119G				1.0		
	UNR911HG/911MG/911VG				2.2		
	UNR9116G/911FG/911LG/911NG				4.7		
	UNR9111G/9114G/9115G				10		
	UNR9112G/9117G/911TG				22		
	UNR9110G/9113G/911DG/911EG				47		
	UNR911AG/911BG				100		

■ Electrical Characteristics (continued) $T_a = 25^\circ\text{C} \pm 3^\circ\text{C}$




Parameter		Symbol	Conditions	Min	Typ	Max	Unit
Emitter-base resistance	UNR911CG	R_2		-30%	47	+30%	k Ω
Resistance ratio	UNR911MG	R_1/R_2			0.047		—
	UNR911NG				0.1		
	UNR9118G/9119G			0.08	0.10	0.12	
	UNR9114G			0.17	0.21	0.25	
	UNR911HG			0.17	0.22	0.27	
	UNR911TG				0.47		
	UNR911FG			0.37	0.47	0.57	
	UNR911AG/911VG				1.0		
	UNR9111G/9112G/9113G/911LG			0.8	1.0	1.2	
	UNR911EG			1.70	2.14	2.60	
UNR911DG	3.7	4.7	5.7				




Note) Measuring methods are based on JAPANESE INDUSTRIAL STANDARD JIS C 7030 measuring methods for transistors.

Common characteristics chart






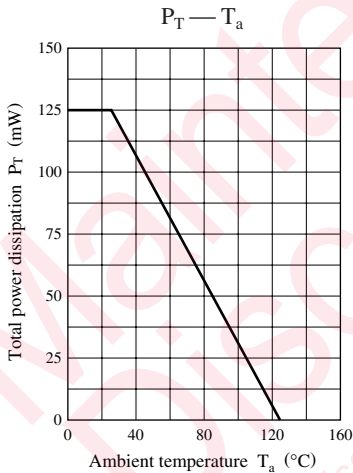


Characteristics charts of UNR9110G




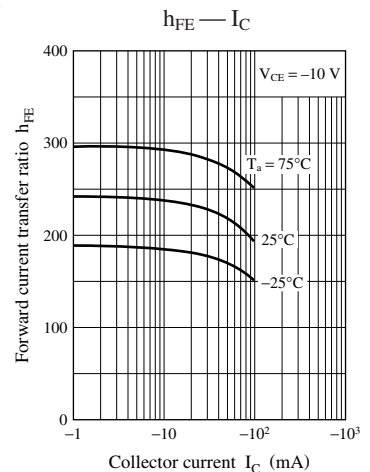
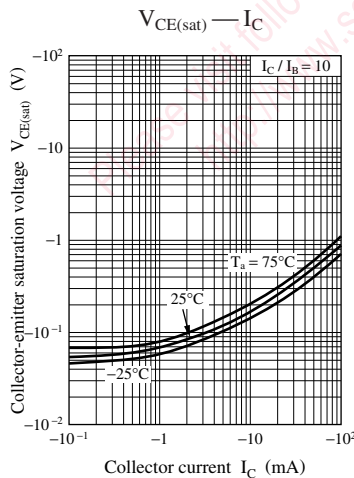
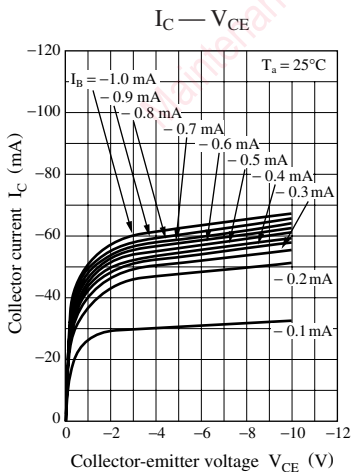


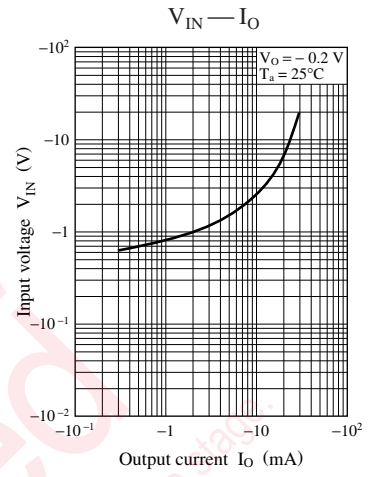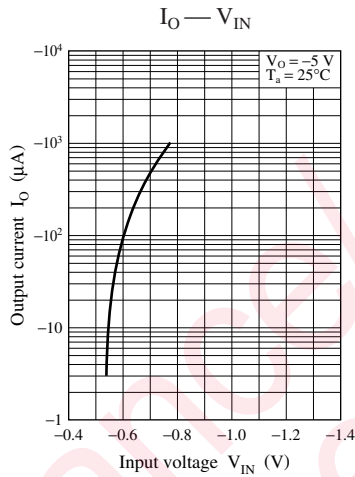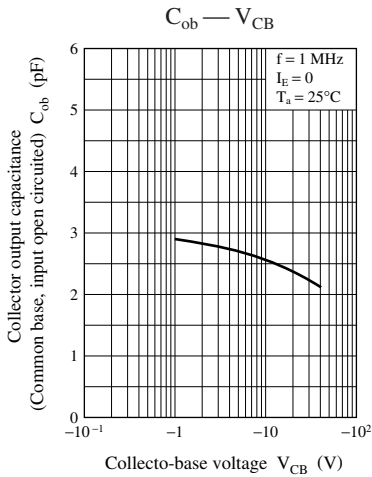




Characteristics charts of UNR9111G

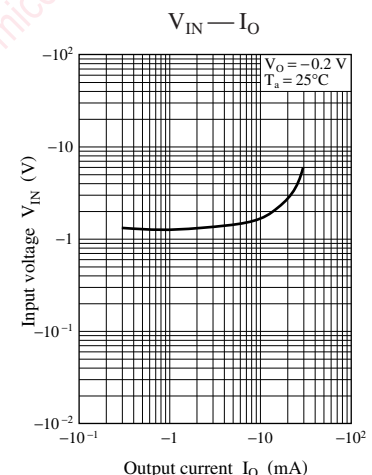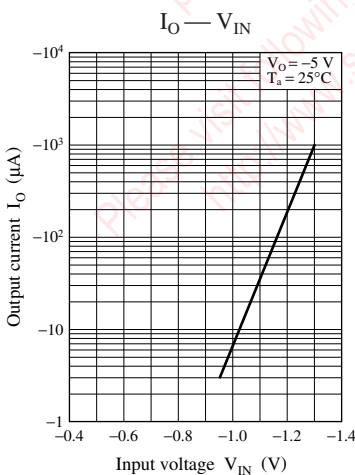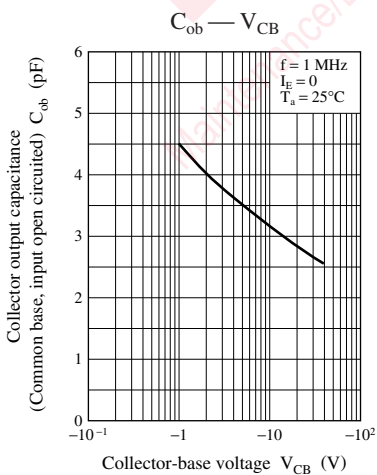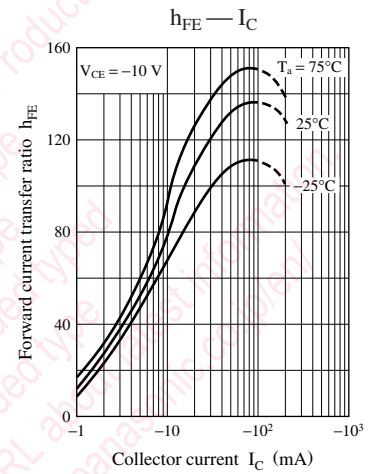
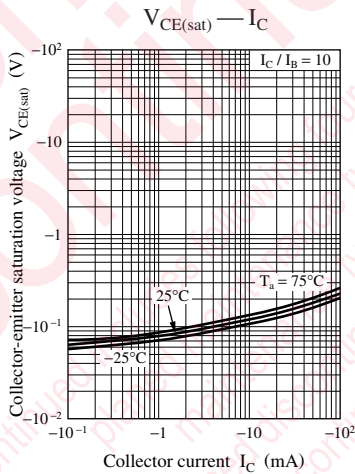
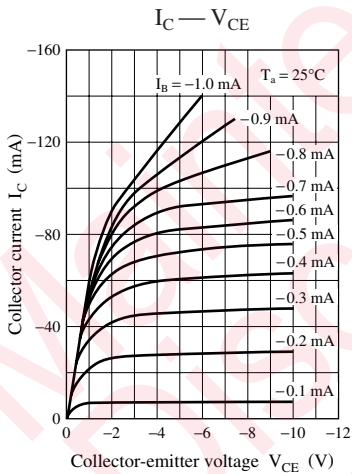


Characteristics charts of UNR9112G

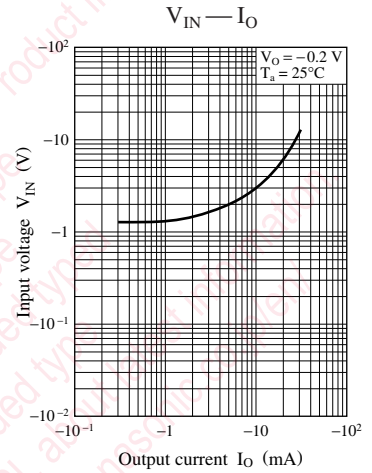
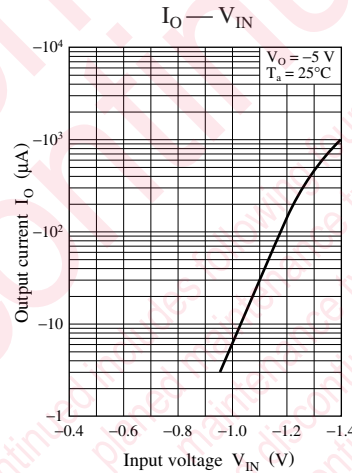
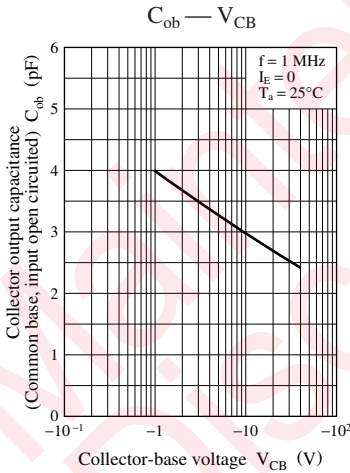
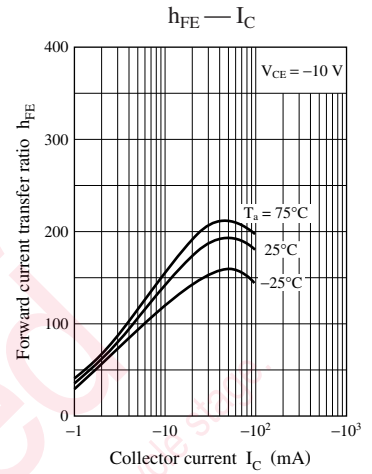
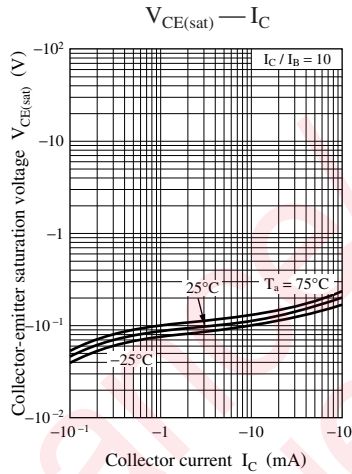
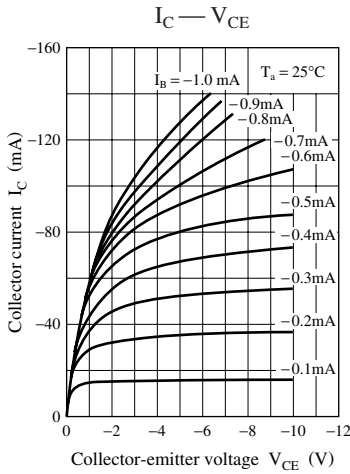


Characteristics charts of UNR9113G




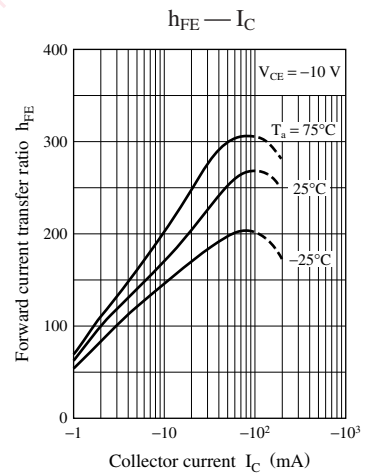
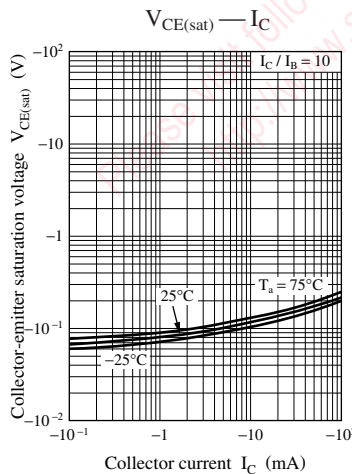
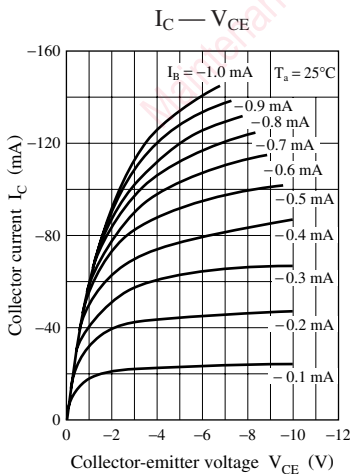


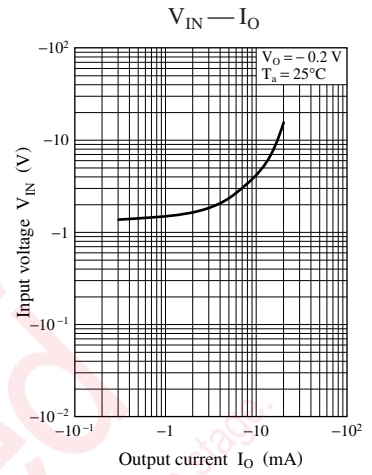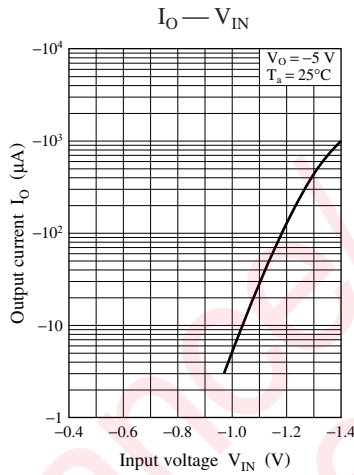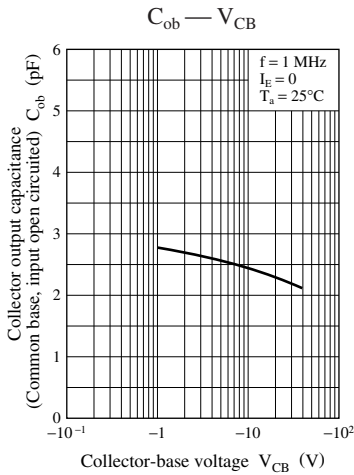




Characteristics charts of UNR9114G

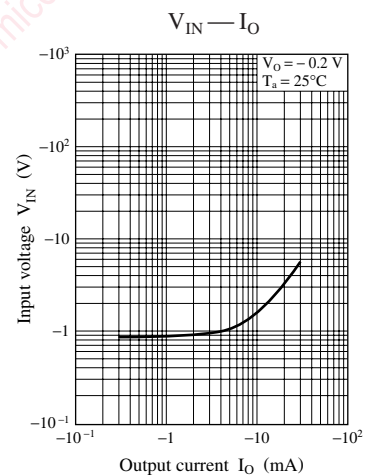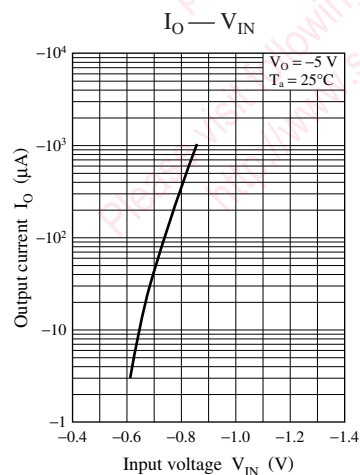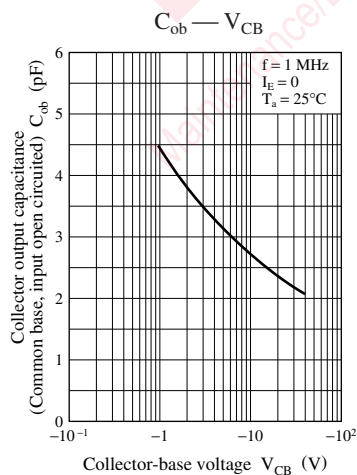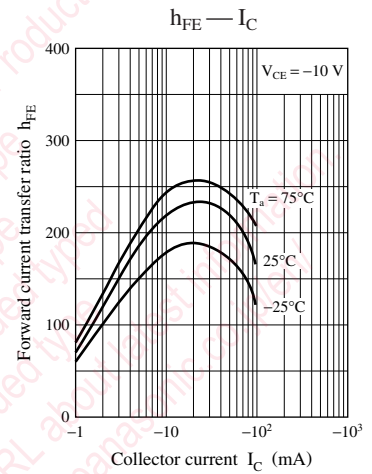
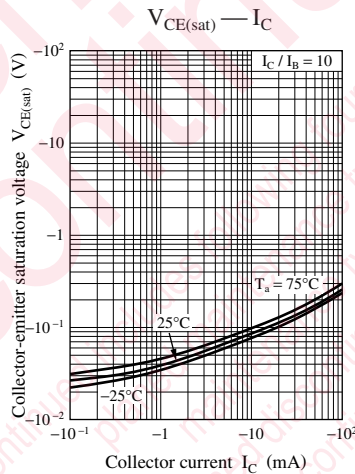
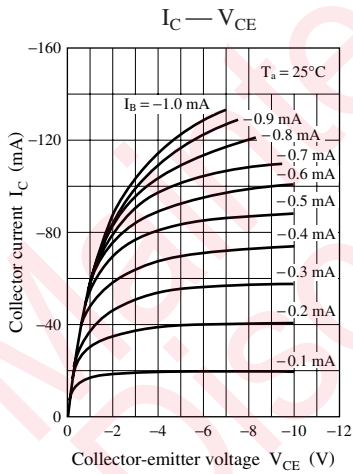


Characteristics charts of UNR9115G

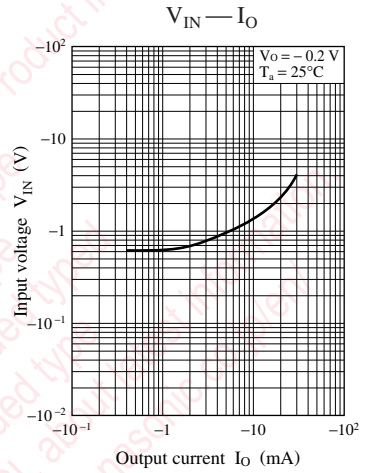
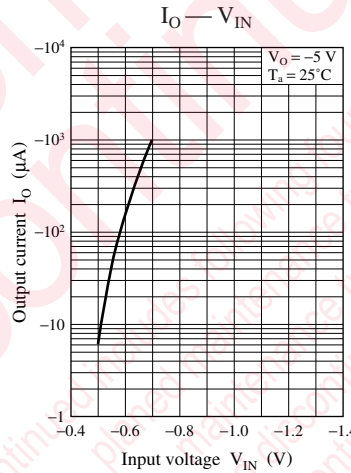
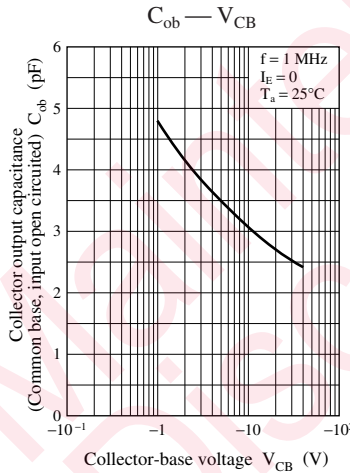
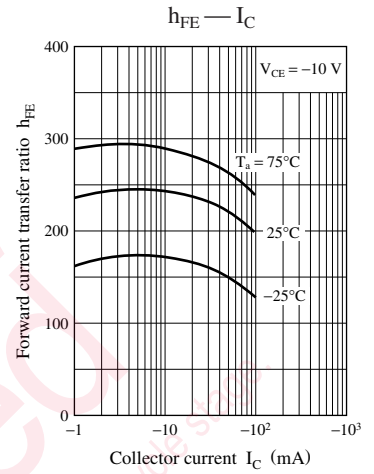
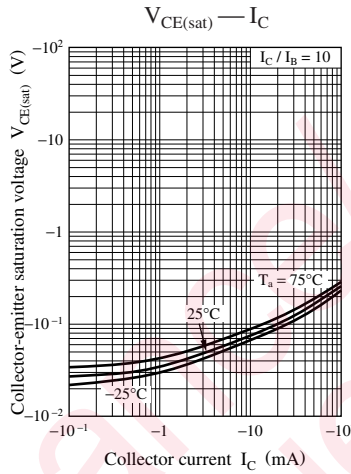
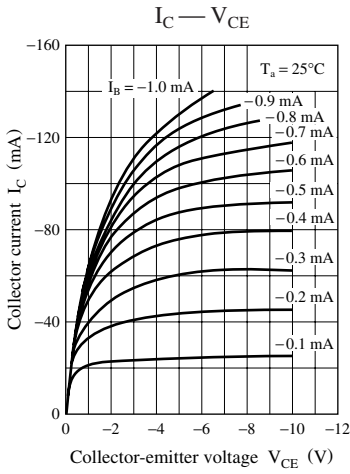


Characteristics charts of UNR9116G




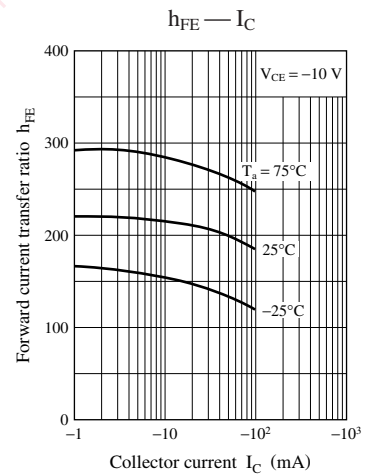
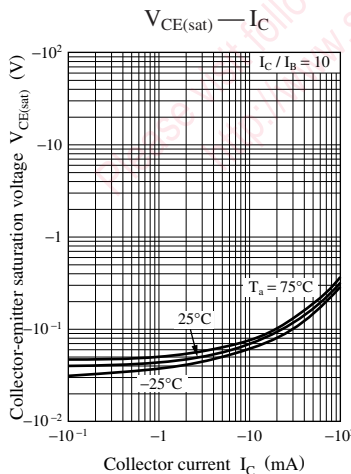
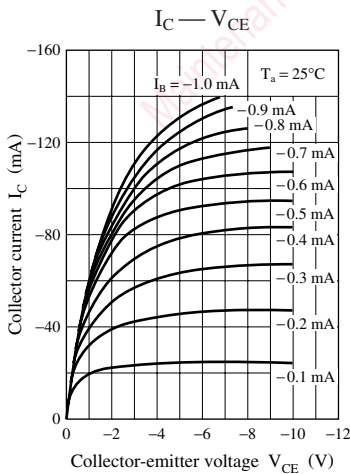


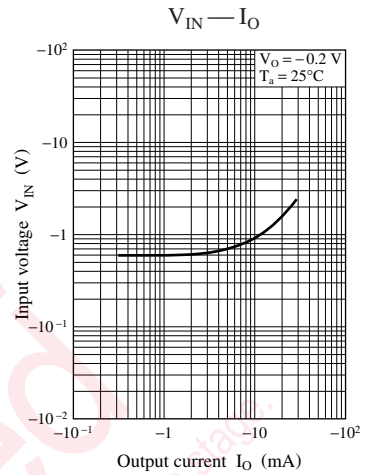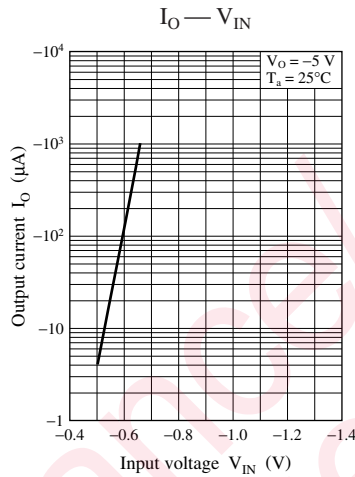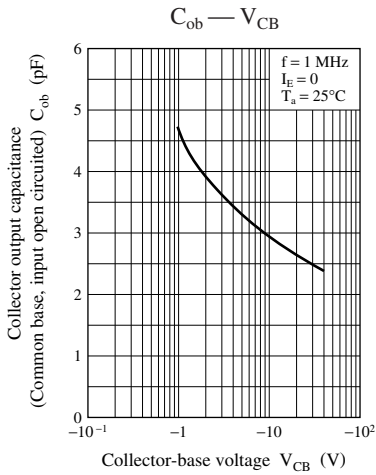




Characteristics charts of UNR9117G

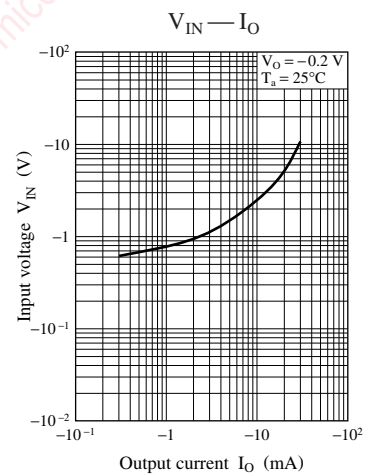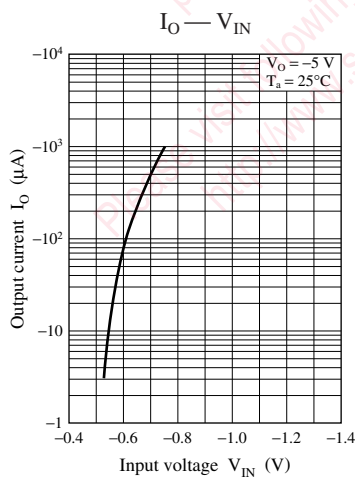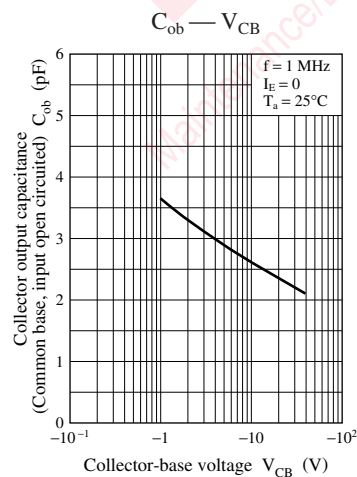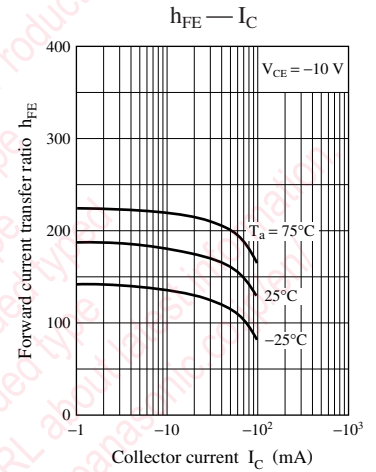
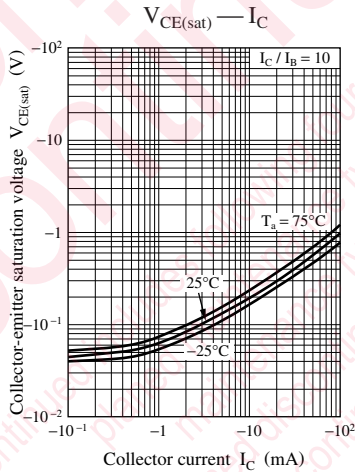
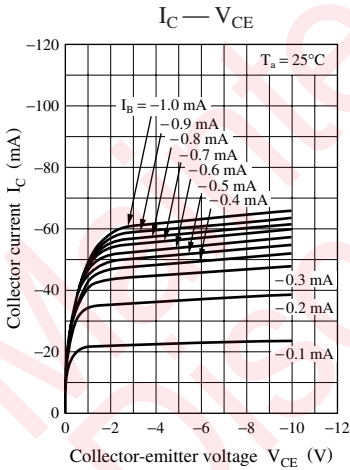


Characteristics charts of UNR9118G

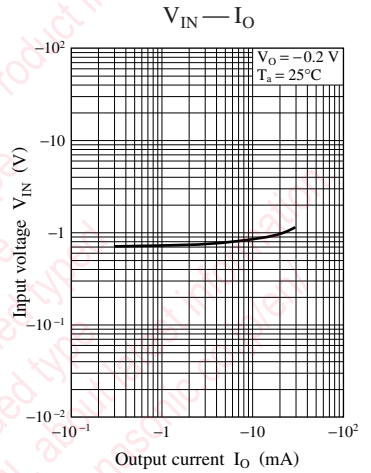
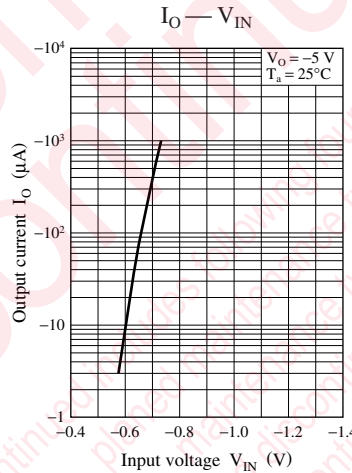
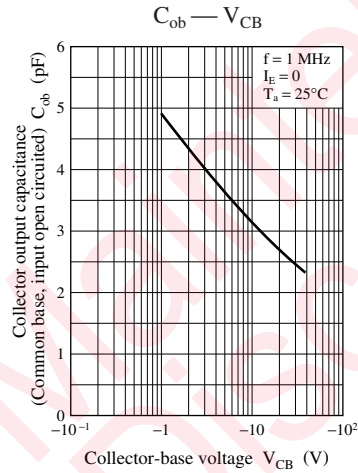
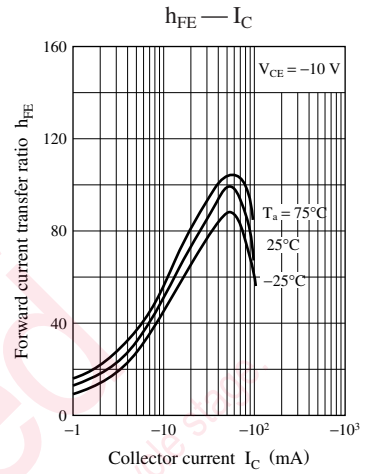
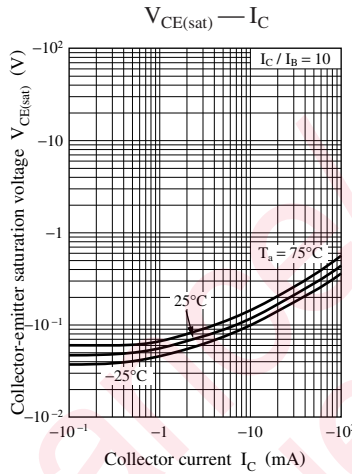
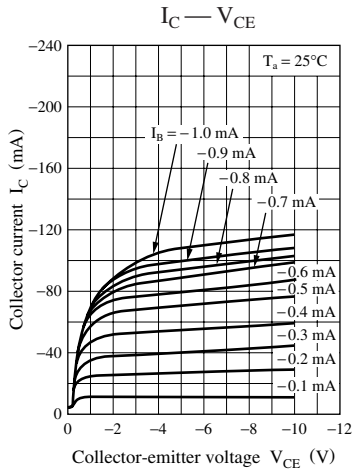


Characteristics charts of UNR9119G




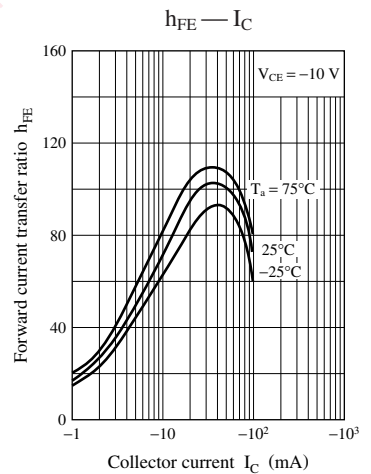
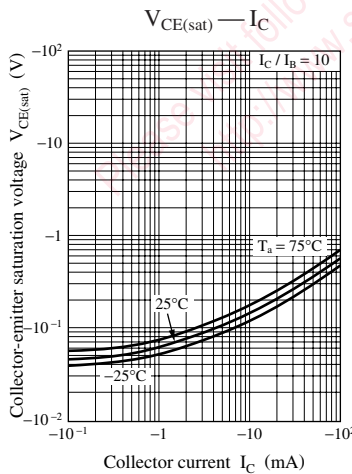
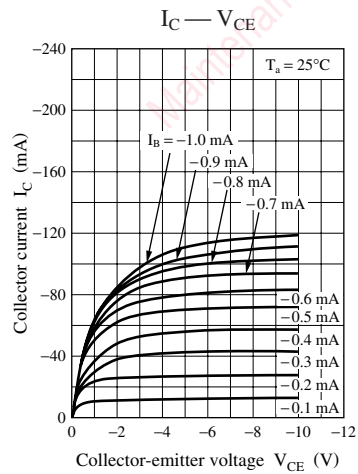


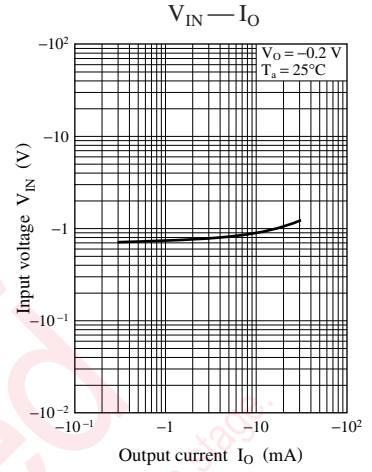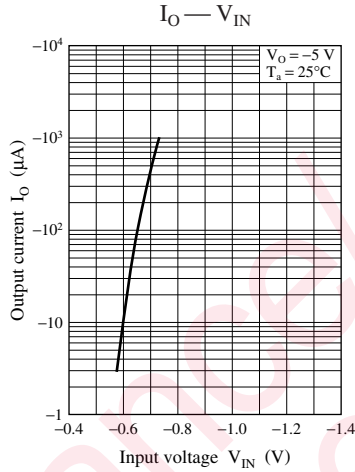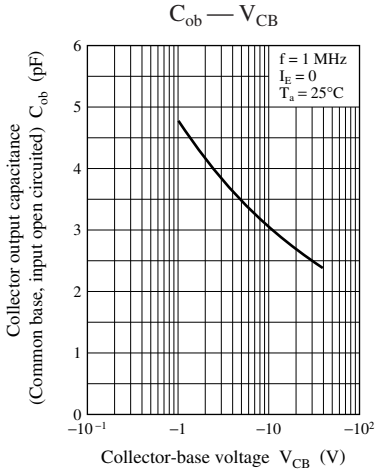




Characteristics charts of UNR911AG

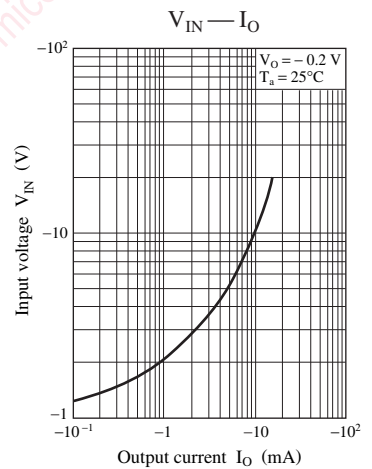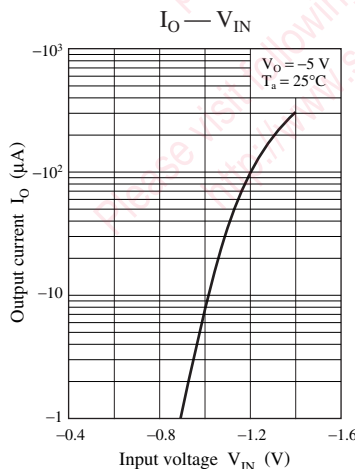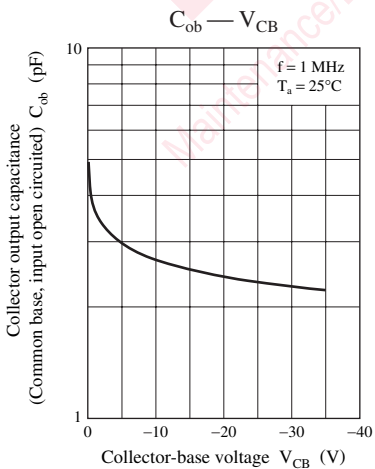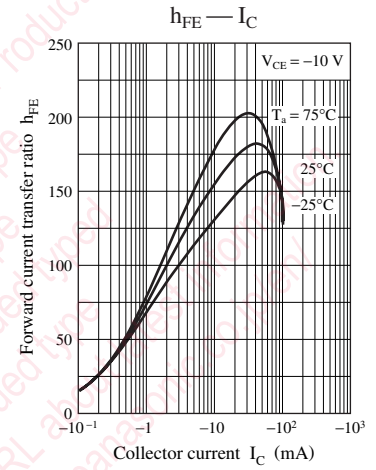
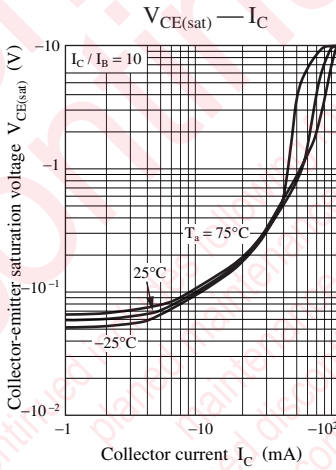
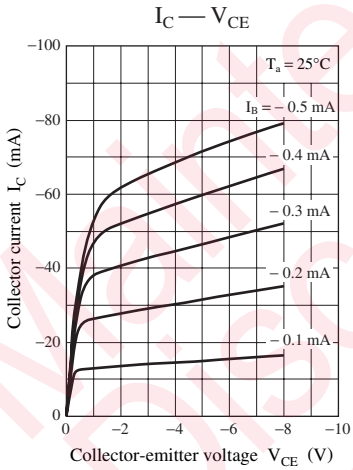


Characteristics charts of UNR911BG

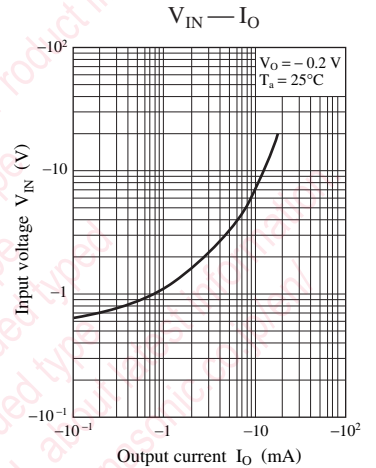
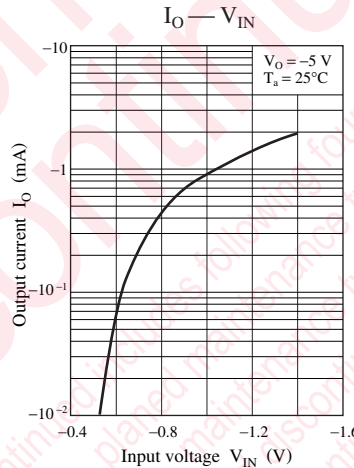
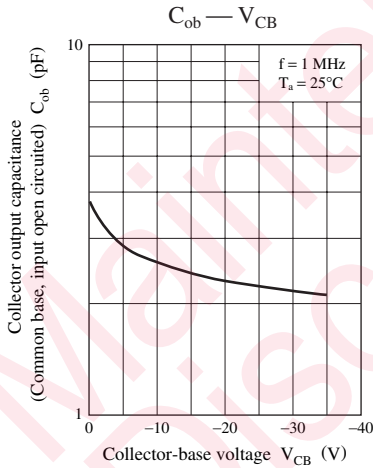
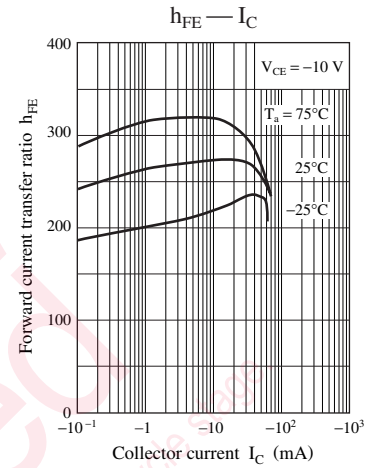
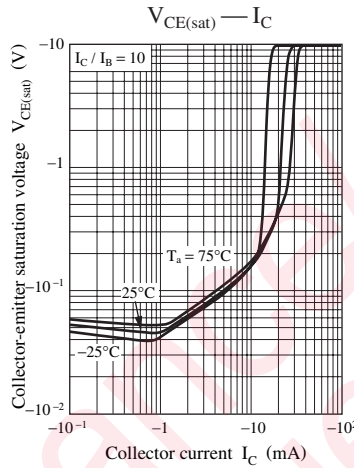
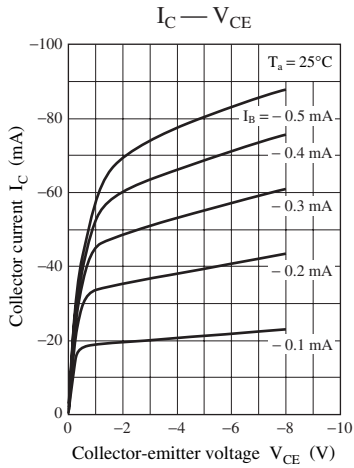


Characteristics charts of UNR911CG




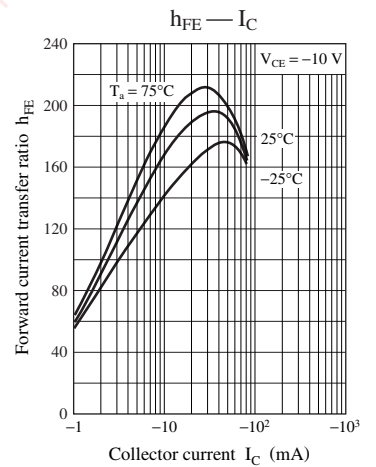
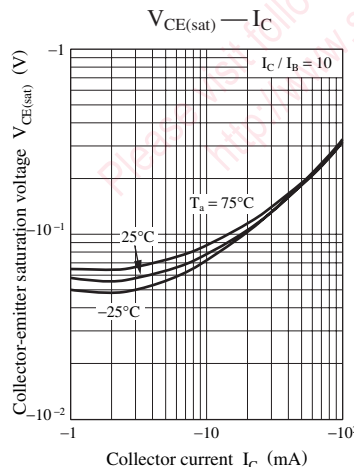
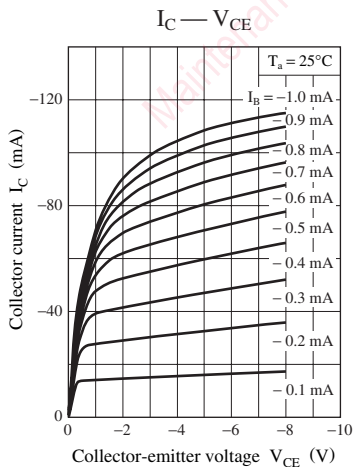


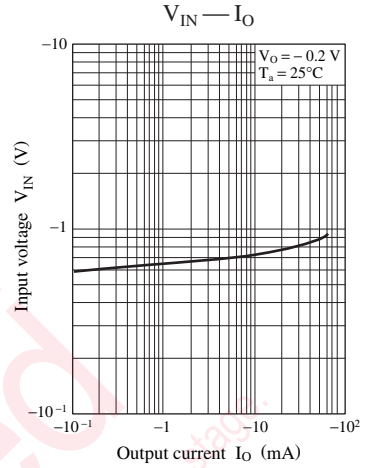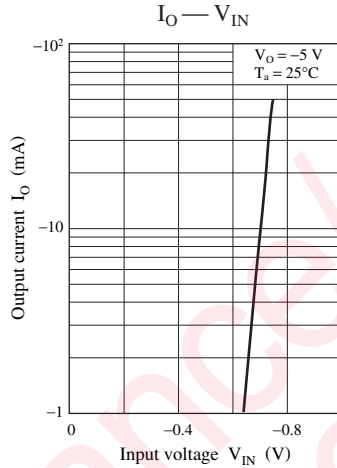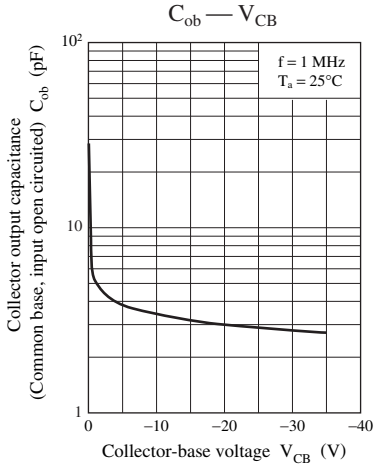




Characteristics charts of UNR911DG

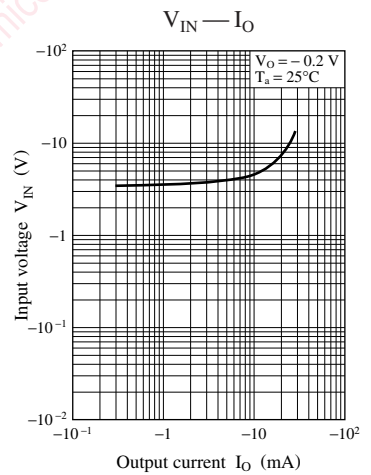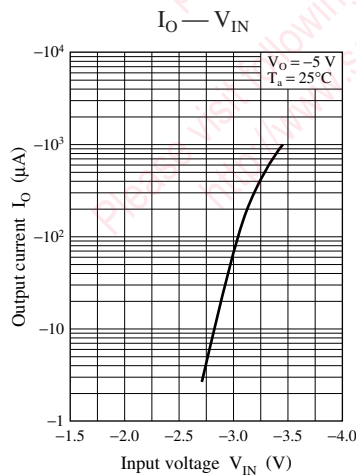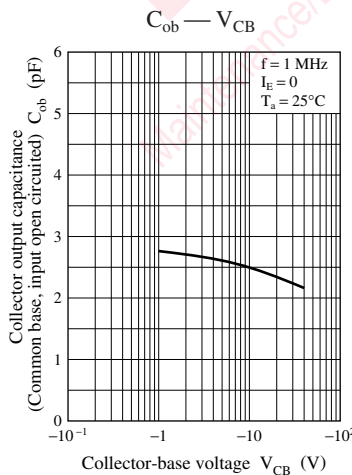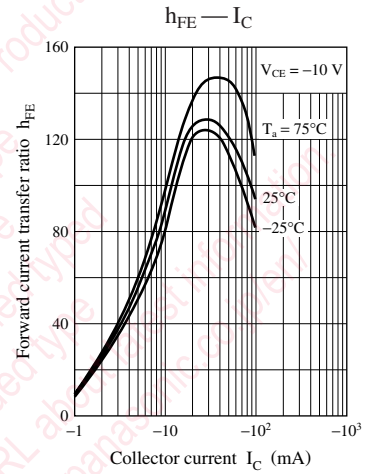
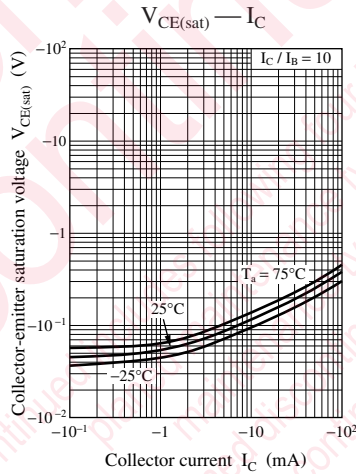
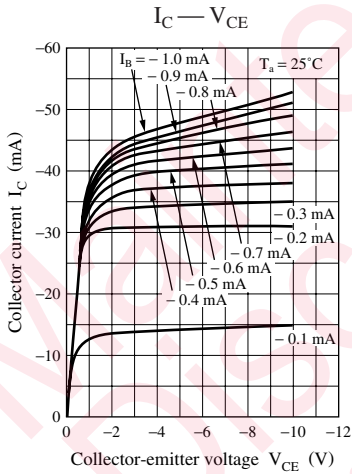


Characteristics charts of UNR911EG

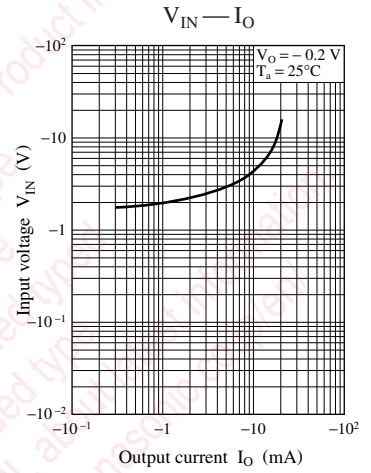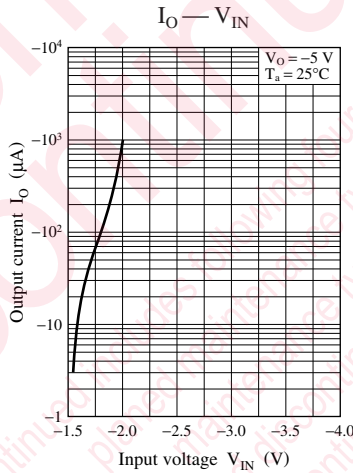
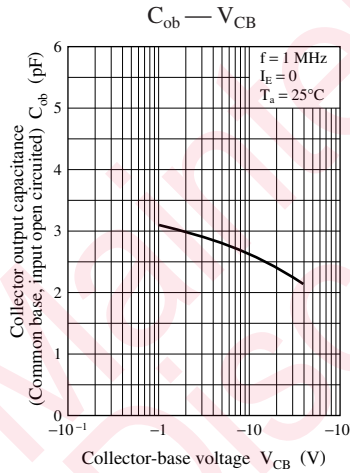
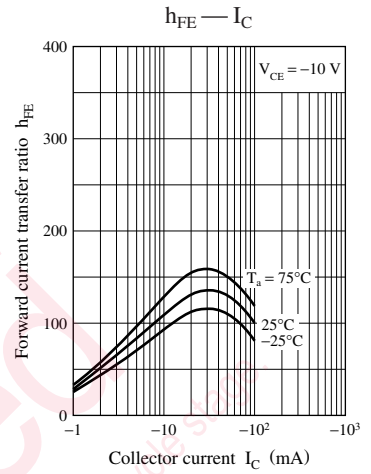
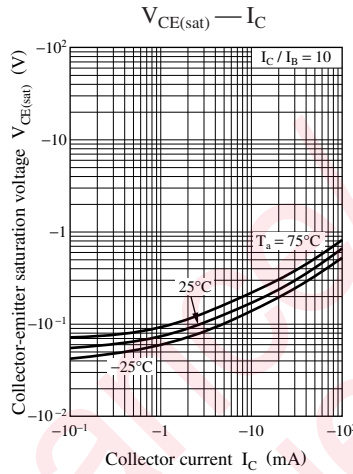
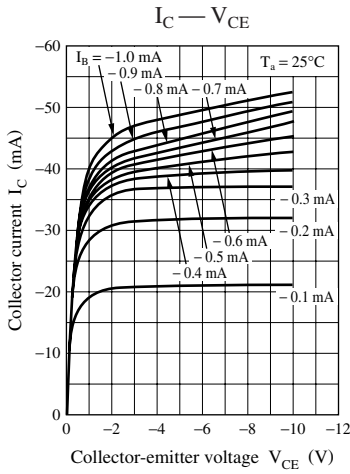


Characteristics charts of UNR911FG



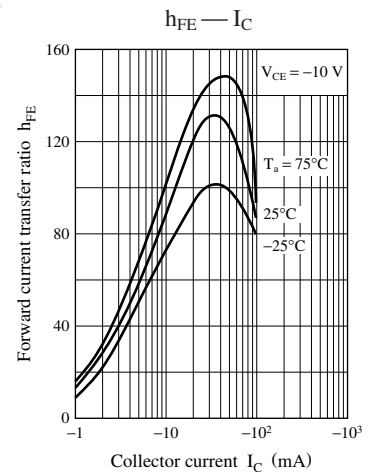
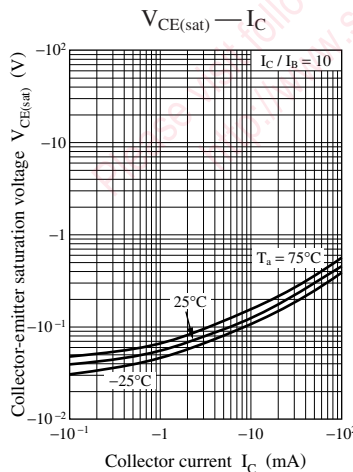
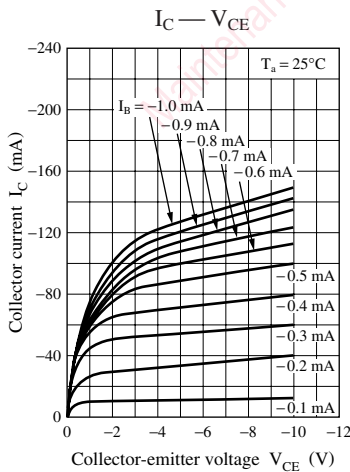


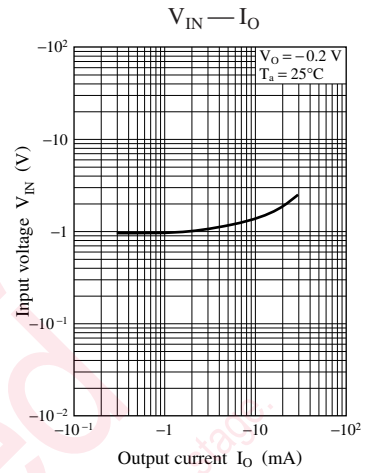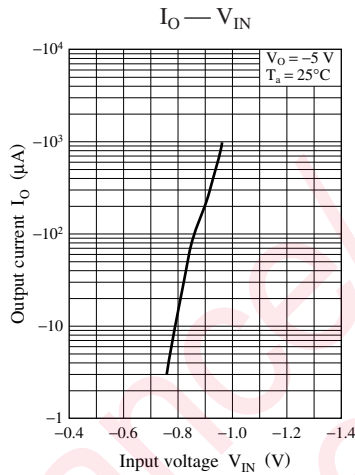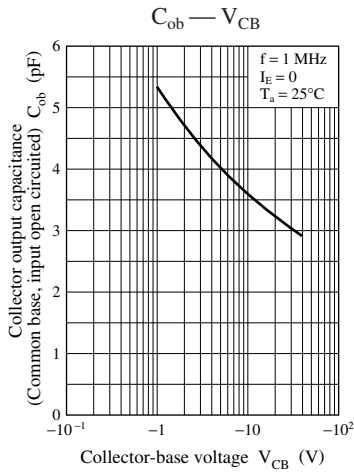




Characteristics charts of UNR911HG

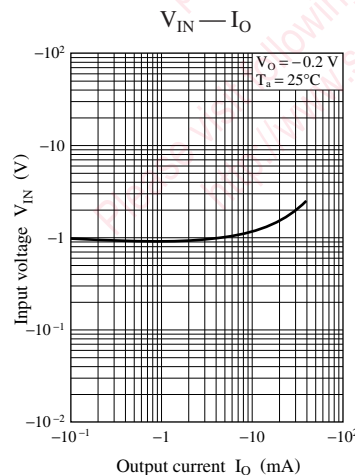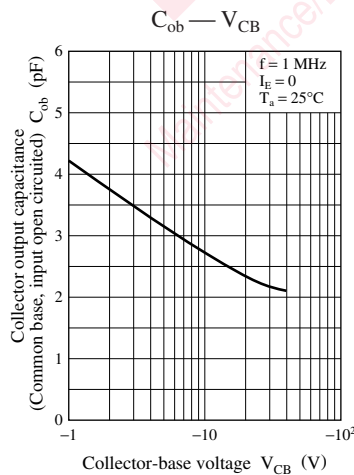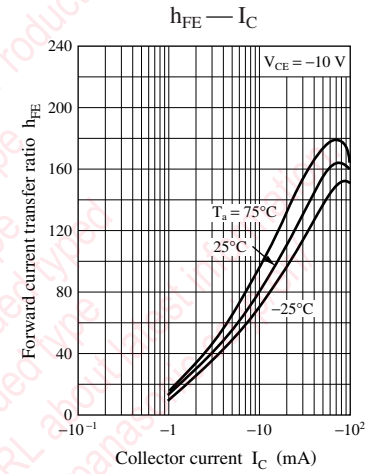
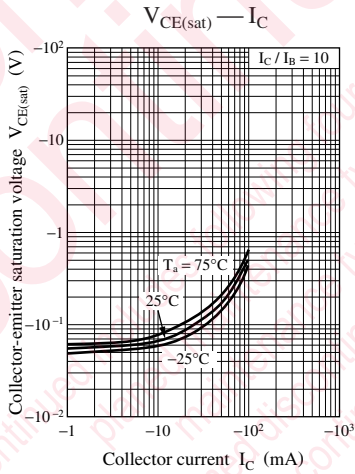
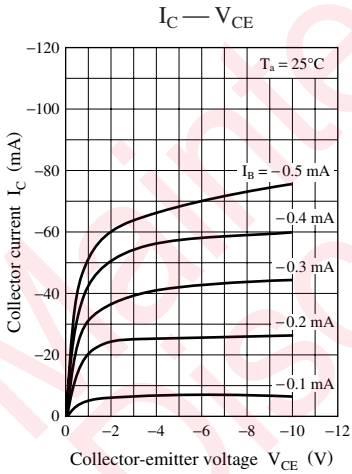


Characteristics charts of UNR911LG


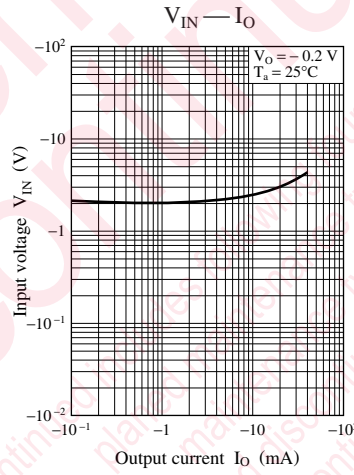
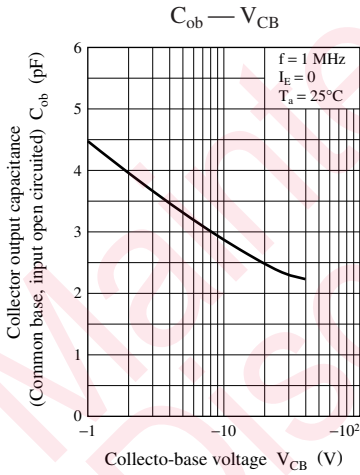
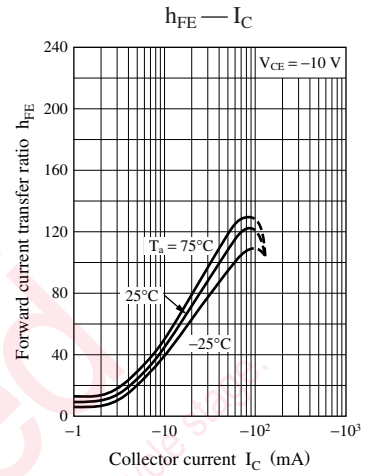
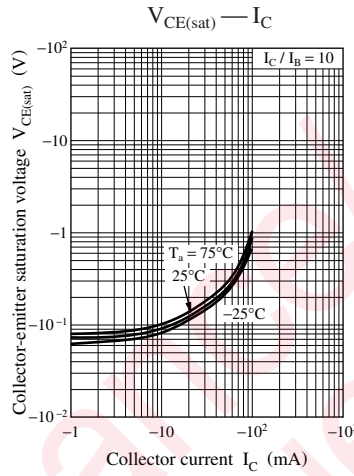
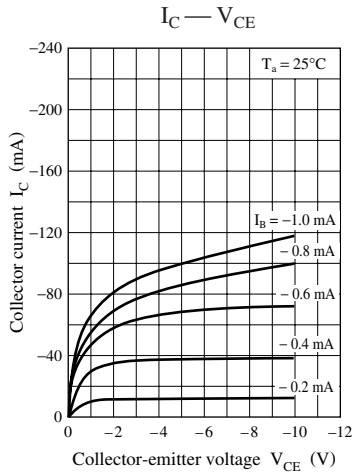


Characteristics charts of UNR911MG




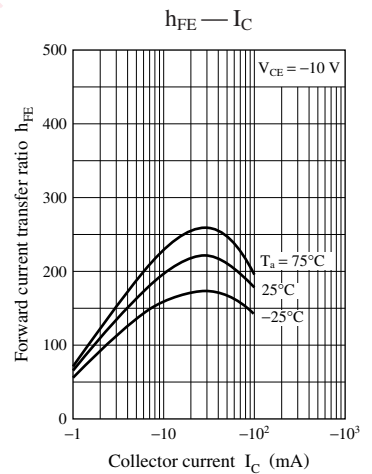
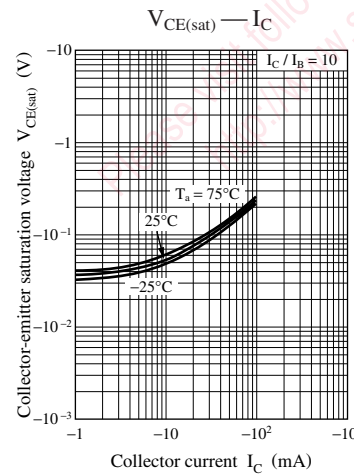
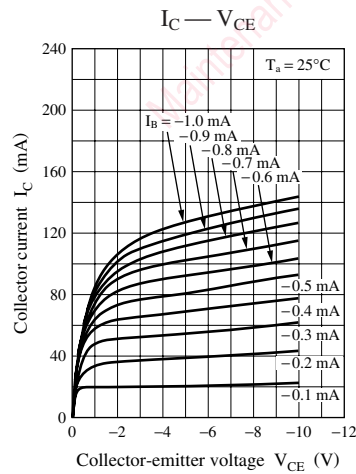


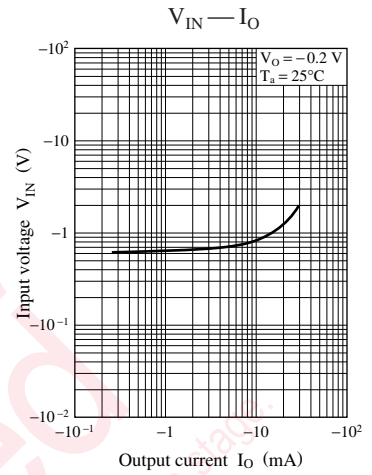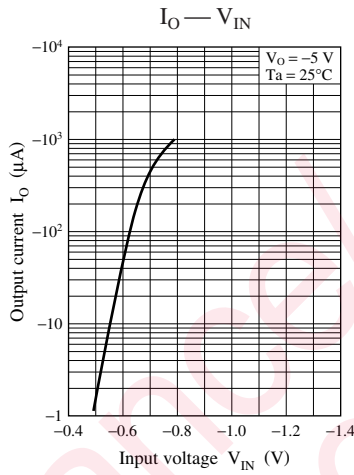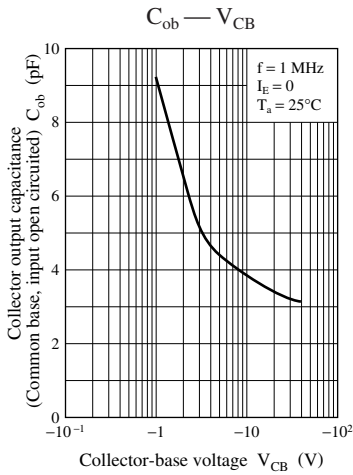




Characteristics charts of UNR911NG

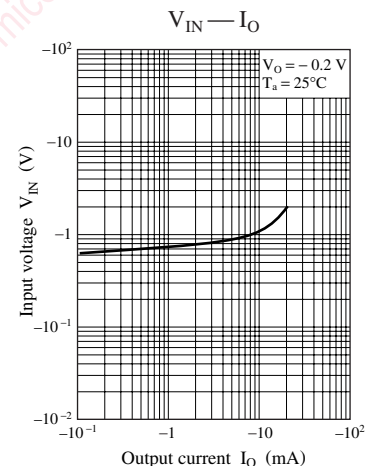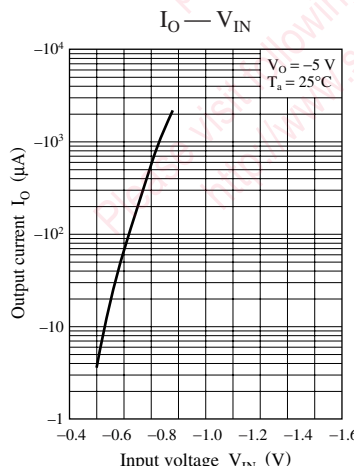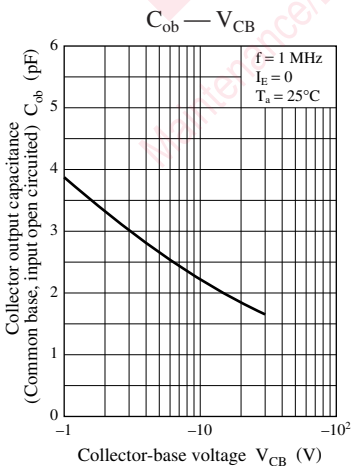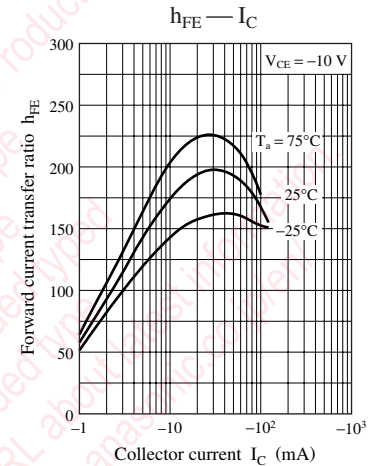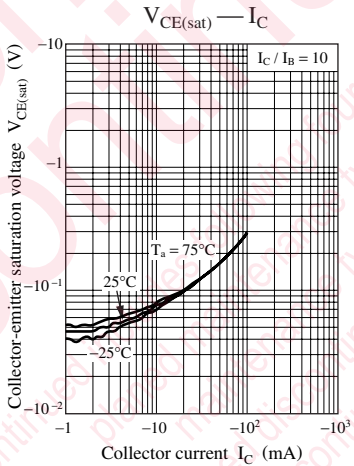
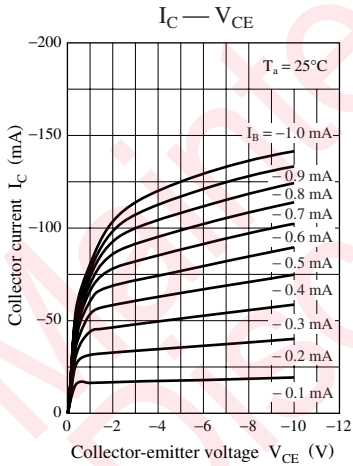


Characteristics charts of UNR911TG

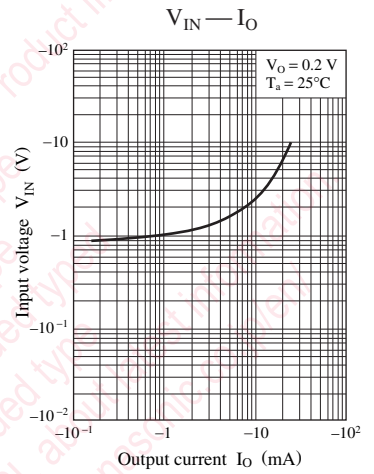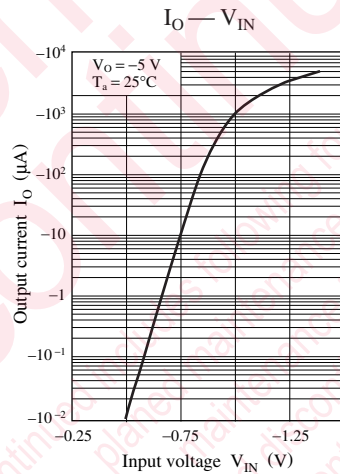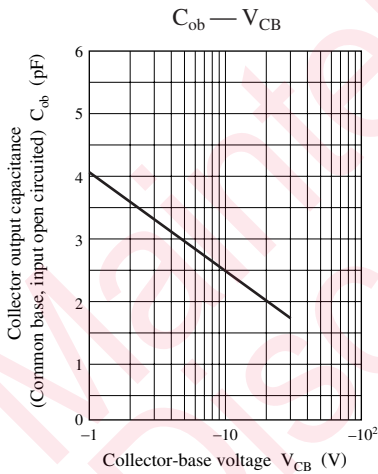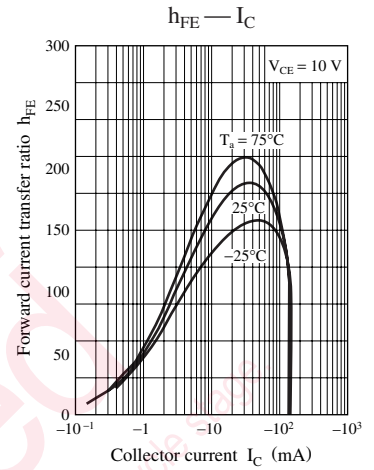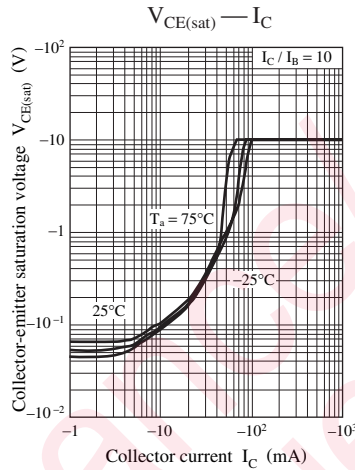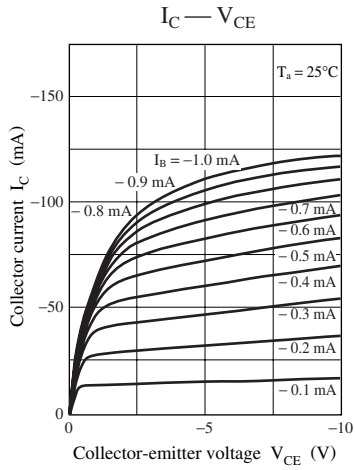

Characteristics charts of UNR911VG

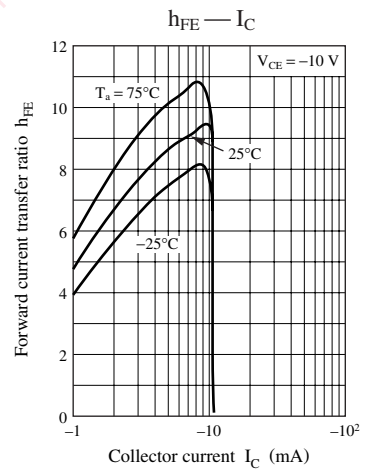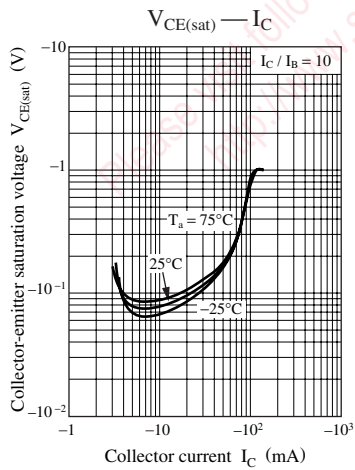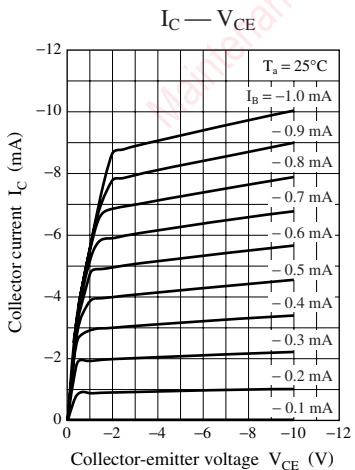

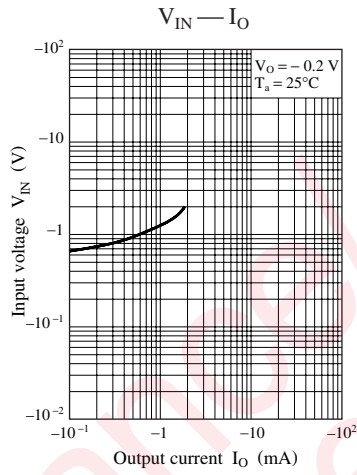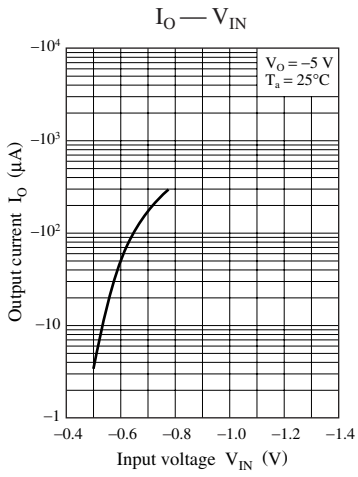


Maintenance/Discontinued

Maintenance/Discontinued includes following four Product lifecycle stage.
 planned maintenance type
 maintenance type
 planned discontinued type
 discontinued type
 Please visit following URL about latest information.
<http://www.semicon.panasonic.co.jp/en/>

SSMini3-F3

Unit: mm

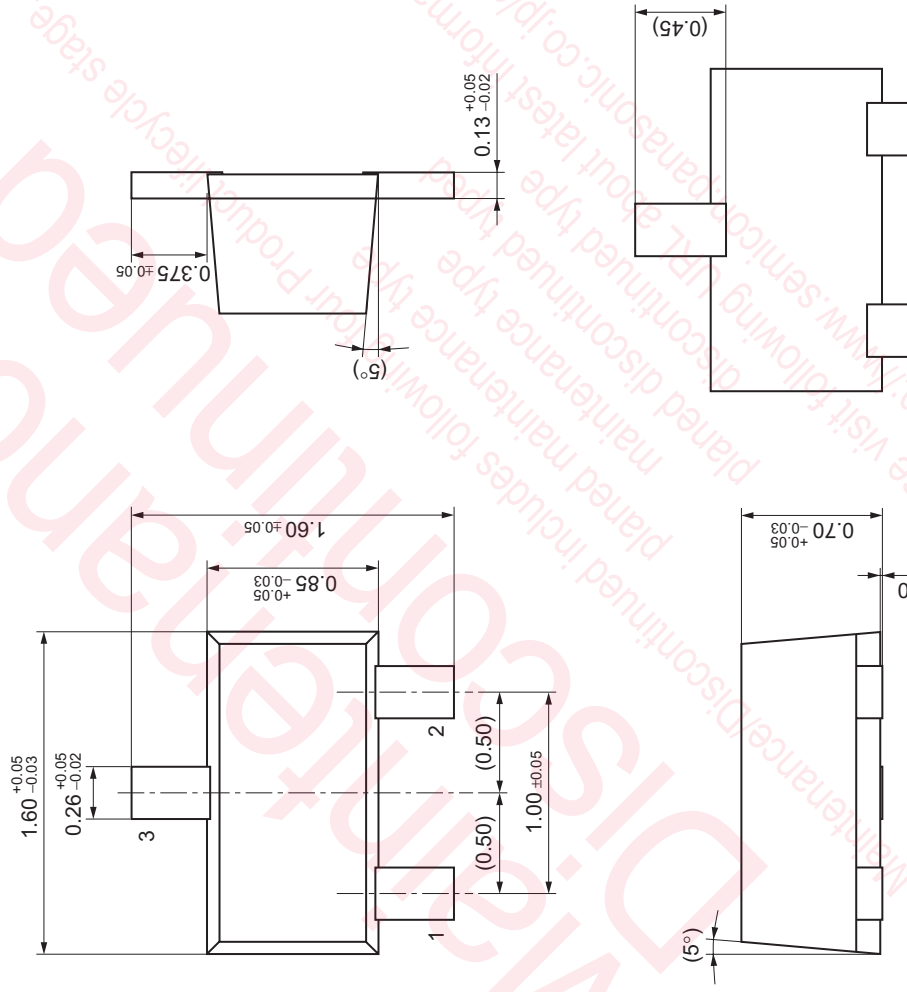

utions in using the technical information and scribed in this book

s book is to be exported or provided to non-residents, the laws and
rd to security export control, must be observed.

ly to show the main characteristics and application circuit examples
l property right or other right owned by our company or any other
any as to the infringement upon any such right owned by any other
rmation described in this book.

standard applications or general electronic equipment (such as office
and household appliances).

ng applications:

biles, traffic control equipment, combustion equipment, life support
reliability are required, or if the failure or malfunction of the prod-

ck are subject to change without notice for modification and/or im-
use of the products, therefore, ask for the most up-to-date Product
atisfy your requirements.

bsolute maximum rating and the guaranteed operating conditions
(.). Especially, please be careful not to exceed the range of absolute
er-off and mode-switching. Otherwise, we will not be liable for any

take into the consideration of incidence of break down and failure
n the systems such as redundant design, arresting the spread of fire
al injury, fire, social damages, for example, by using the products.

own and characteristics change due to external factors (ESD, EOS,
mounting or at customer's process. When using products for which
shelf life and the elapsed time since first opening the packages.

ly or partially, without the prior written permission of Matsushita







Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View UNR911EG0L on WIN SOURCE](#)

 [Panasonic Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management