



**THE DATASHEET OF  
AT-41486-TR1G**



# AT-41486

## Up to 6 GHz Low Noise Silicon Bipolar Transistor



### Data Sheet

#### Description


Avago's AT-41486 is a general purpose NPN bipolar transistor that offers excellent high frequency performance. The AT-41486 is housed in a low cost surface mount .085" diameter plastic package. The 4 micron emitter-to-emitter pitch enables this transistor to be used in many different functions. The 14 emitter finger interdigitated geometry yields an intermediate sized transistor with impedances that are easy to match for low noise and moderate power applications. Applications include use in wireless systems as an LNA, gain stage, buffer, oscillator, and mixer. An optimum noise match near 50Ω at 900 MHz, makes this device easy to use as a low noise amplifier.

The AT-41486 bipolar transistor is fabricated using Avago's 10 GHz  $f_T$  Self-Aligned-Transistor (SAT) process. The die is nitride passivated for surface protection. Excellent device uniformity, performance and reliability are produced by the use of ion-implantation, self-alignment techniques, and gold metalization in the fabrication of this device.


#### Features

- Low Noise Figure:  
1.4 dB Typical at 1.0 GHz  
1.7 dB Typical at 2.0 GHz
- High Associated Gain:  
18.0 dB Typical at 1.0 GHz  
13.0 dB Typical at 2.0 GHz
- High Gain-Bandwidth Product: 8.0 GHz Typical  $f_T$
- Surface Mount Plastic Package
- Tape-and-Reel Packaging Option Available
- Lead-free Option Available

#### 86 Plastic Package



#### Pin Connections

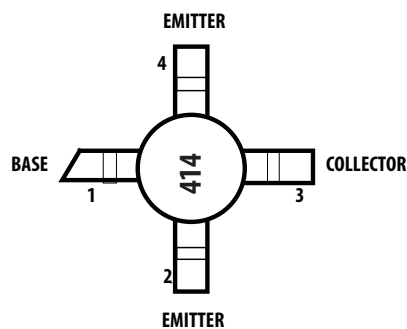

## AT-41486 Absolute Maximum Ratings

Symbol	Parameter	Units	Absolute Maximum <sup>[1]</sup>
V <sub>EBO</sub>	Emitter-Base Voltage	V	1.5
V <sub>CBO</sub>	Collector-Base Voltage	V	20
V <sub>CEO</sub>	Collector-Emitter Voltage	V	12
I <sub>C</sub>	Collector Current	mA	60
P <sub>T</sub>	Power Dissipation <sup>[2,3]</sup>	mW	500
T <sub>J</sub>	Junction Temperature	°C	150
T <sub>STG</sub>	Storage Temperature	°C	-65 to 150

### Thermal Resistance<sup>[2,4]</sup>:

$$\theta_{jc} = 165^{\circ}\text{C}/\text{W}$$

Notes:

1. Permanent damage may occur if any of these limits are exceeded.
2. T<sub>CASE</sub> = 25°C.
3. Derate at 6 mW/°C for T<sub>C</sub> > 68°C.
4. See MEASUREMENTS section "Thermal Resistance" for more information.

## Ordering Information

Part Numbers	No. of Devices	Comments
AT-41486-BLK	100	Bulk
AT-41486-BLKG	100	Bulk
AT-41486-TR1	1000	7" Reel
AT-41486-TR1G	1000	7" Reel
AT-41486-TR2	4000	13" Reel
AT-41486-TR2G	4000	13" Reel

Note: Order part number with a "G" suffix if lead-free option is desired.


## Electrical Specifications, T<sub>A</sub> = 25°C

Symbol	Parameters and Test Conditions	Units	Min.	Typ.	Max.
S <sub>21E</sub>   <sup>2</sup>	Insertion Power Gain; V <sub>CE</sub> = 8 V, I <sub>C</sub> = 25 mA	f = 1.0 GHz f = 2.0 GHz		17.5 11.5	
P <sub>1 dB</sub>	Power Output @ 1 dB Gain Compression V <sub>CE</sub> = 8 V, I <sub>C</sub> = 25 mA	f = 2.0 GHz		18.0	
G <sub>1 dB</sub>	1 dB Compressed Gain; V <sub>CE</sub> = 8 V, I <sub>C</sub> = 25 mA	f = 2.0 GHz		13.5	
NF <sub>0</sub>	Optimum Noise Figure; V <sub>CE</sub> = 8 V, I <sub>C</sub> = 10 mA	f = 1.0 GHz f = 2.0 GHz f = 4.0 GHz		1.4 1.7 3.0	1.8
G <sub>A</sub>	Gain @ NF <sub>0</sub> ; V <sub>CE</sub> = 8 V, I <sub>C</sub> = 10 mA	f = 1.0 GHz f = 2.0 GHz f = 4.0 GHz	17.0	18.0 13.0 9.0	
f <sub>T</sub>	Gain Bandwidth Product; V <sub>CE</sub> = 8 V, I <sub>C</sub> = 25 mA			8.0	
h <sub>FE</sub>	Forward Current Transfer Ratio; V <sub>CE</sub> = 8 V, I <sub>C</sub> = 10 mA		30	150	270
I <sub>CBO</sub>	Collector Cutoff Current; V <sub>CB</sub> = 8 V				0.2
I <sub>EBO</sub>	Emitter Cutoff Current; V <sub>EB</sub> = 1 V				1.0
C <sub>CB</sub>	Collector Base Capacitance <sup>[1]</sup> ; V <sub>CB</sub> = 8 V, f = 1 MHz			0.25	


Note:

1. For this test, the emitter is grounded.


**AT-41486 Typical Performance,  $T_A = 25^\circ\text{C}$**

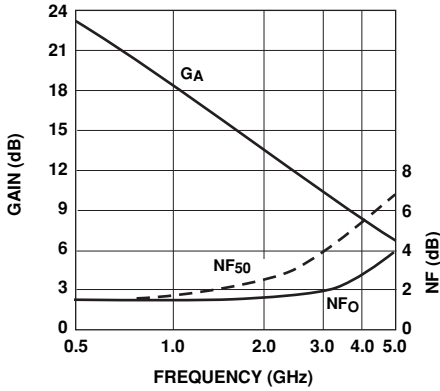


**Figure 1. Noise Figure and Associated Gain vs. Frequency.  $V_{CE} = 8\text{ V}$ ,  $I_C = 10\text{ mA}$ .**

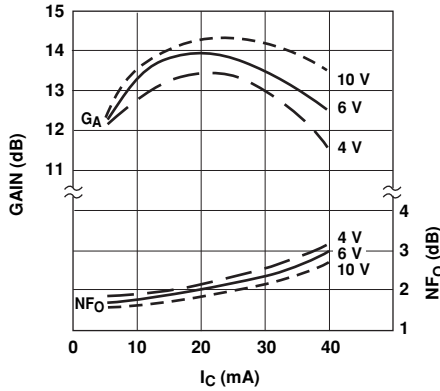


**Figure 2. Optimum Noise Figure and Associated Gain vs. Collector Current and Collector Voltage.  $f = 2.0\text{ GHz}$ .**

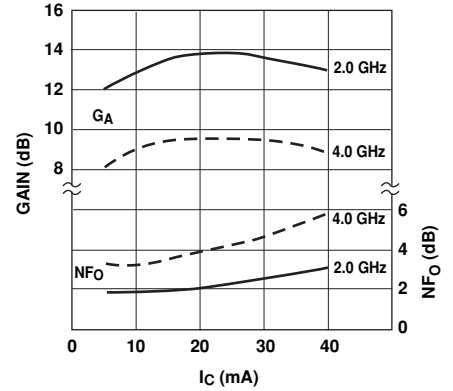


**Figure 3. Optimum Noise Figure and Associated Gain vs. Collector Current and Frequency.  $V_{CE} = 8\text{ V}$ .**

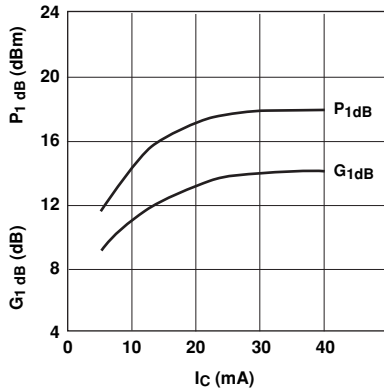

**Figure 4. Output Power and 1 dB Compressed Gain vs. Collector Current and Frequency.  $V_{CE} = 8\text{ V}$ ,  $f = 2.0\text{ GHz}$ .**

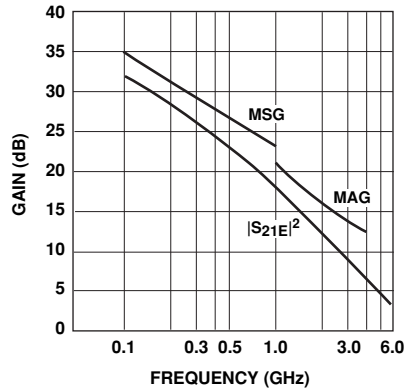

**Figure 5. Insertion Power Gain, Maximum Available Gain and Maximum Stable Gain vs. Frequency.  $V_{CE} = 8\text{ V}$ ,  $I_C = 25\text{ mA}$ .**

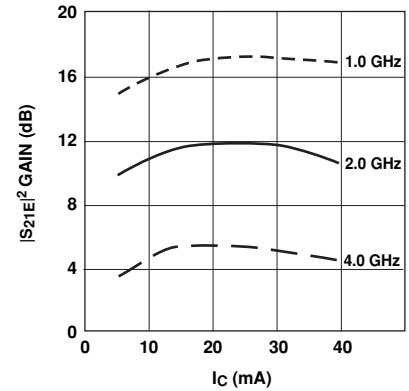

**Figure 6. Insertion Power Gain vs. Collector Current and Frequency.  $V_{CE} = 8\text{ V}$ .**

**AT-41486 Typical Scattering Parameters, Common Emitter,  $Z_0 = 50 \Omega$ ,  $T_A = 25^\circ\text{C}$ ,  $V_{CE} = 8\text{ V}$ ,  $I_C = 10\text{ mA}$**

Freq. GHz	$S_{11}$			$S_{21}$			$S_{12}$			$S_{22}$	
	Mag.	Ang.	dB	Mag.	Ang.	dB	Mag.	Ang.	Mag.	Ang.	
0.1	.74	-38	28.1	25.46	157	-39.6	.011	68	.94	-12	
0.5	.59	-127	22.0	12.63	107	-30.2	.031	47	.60	-29	
1.0	.56	-168	16.8	6.92	84	-27.7	.041	46	.49	-29	
1.5	.57	169	13.5	4.72	69	-26.2	.049	49	.45	-32	
2.0	.62	152	11.1	3.61	56	-24.8	.058	43	.42	-39	
2.5	.63	142	9.3	2.91	47	-23.4	.068	52	.40	-42	
3.0	.64	130	7.6	2.41	37	-22.2	.078	52	.39	-50	
3.5	.68	122	6.3	2.06	26	-20.6	.093	51	.37	-60	
4.0	.71	113	5.1	1.80	16	-19.5	.106	48	.35	-70	
4.5	.74	105	4.0	1.59	7	-18.0	.125	48	.35	-84	
5.0	.77	99	3.1	1.42	-4	-17.2	.139	43	.35	-98	
5.5	.79	93	2.0	1.27	-13	-16.3	.153	38	.35	-114	
6.0	.81	87	1.1	1.13	-22	-15.4	.170	34	.35	-131	

**AT-41486 Typical Scattering Parameters, Common Emitter,  $Z_0 = 50 \Omega$ ,  $T_A = 25^\circ\text{C}$ ,  $V_{CE} = 8\text{ V}$ ,  $I_C = 25\text{ mA}$**


Freq. GHz	$S_{11}$			$S_{21}$			$S_{12}$			$S_{22}$	
	Mag.	Ang.	dB	Mag.	Ang.	dB	Mag.	Ang.	Mag.	Ang.	
0.1	.50	-75	32.0	40.01	142	-41.3	.009	54	.85	-17	
0.5	.55	-158	23.2	14.38	97	-34.1	.020	48	.51	-24	
1.0	.57	177	17.5	7.50	78	-29.9	.032	61	.46	-24	
1.5	.57	161	14.1	5.07	65	-27.3	.043	62	.44	-28	
2.0	.59	148	11.5	3.75	53	-24.8	.058	59	.43	-35	
2.5	.61	139	9.6	3.02	45	-22.9	.072	58	.40	-41	
3.0	.65	128	8.0	2.52	34	-21.6	.083	57	.38	-49	
3.5	.70	121	6.7	2.17	24	-20.1	.099	56	.36	-59	
4.0	.74	113	5.7	1.92	14	-18.8	.115	52	.34	-72	
4.5	.78	107	4.7	1.72	3	-17.6	.132	47	.32	-87	
5.0	.78	102	3.7	1.53	-8	-16.6	.149	42	.31	-106	
5.5	.78	96	2.7	1.36	-19	-15.4	.169	36	.31	-125	
6.0	.76	91	1.6	1.21	-29	-14.5	.188	31	.33	-144	

A model for this device is available in the DEVICE MODELS section.

**AT-41486 Noise Parameters:  $V_{CE} = 8\text{ V}$ ,  $I_C = 10\text{ mA}$**

Freq. GHz	$NF_0$ dB	$\Gamma_{opt}$		$R_N/50$
		Mag	Ang	
0.1	1.3	.12	3	0.17
0.5	1.3	.10	16	0.17
1.0	1.4	.04	43	0.16
2.0	1.7	.12	-145	0.16
4.0	3.0	.44	-99	0.40

## 86 Plastic Package Dimensions

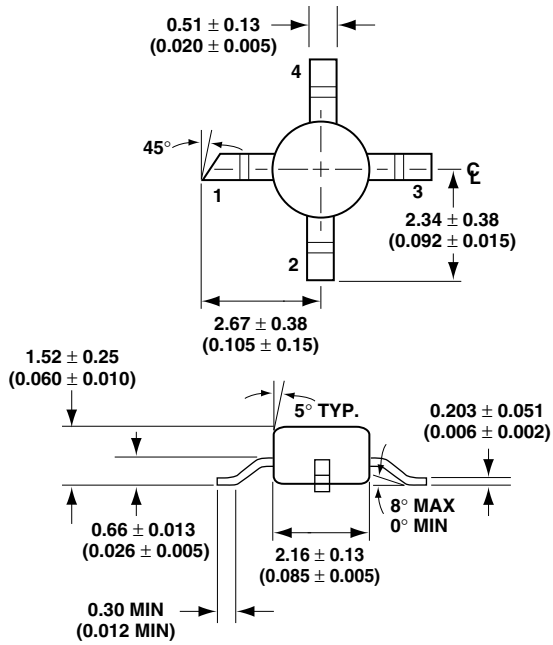

DIMENSIONS ARE IN MILLIMETERS (INCHES)

For product information and a complete list of distributors, please go to our web site: [www.avagotech.com](http://www.avagotech.com)

Avago, Avago Technologies, and the A logo are trademarks of Avago Technologies in the United States and other countries. Data subject to change. Copyright © 2005-2012 Avago Technologies. All rights reserved. Obsoletes 5989-2648EN AV02-3624EN - June 14, 2012

**Avago**  
TECHNOLOGIES

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View AT-41486-TR1G on WIN SOURCE](#)

 [Broadcom Limited Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management