



THE DATASHEET OF
2500BP15M400E



High Frequency Ceramic Solutions

2.5 GHz Band Pass Filter

P/N 2500BP15M400

Detail Specification: 1/18/2019

Page 1 of 3

General Specifications

Part Number	2500BP15M400	Impedance	50 Ω
Frequency (MHz)	2300 - 2700	Input Power	3W max.
Insertion Loss	2.0 dB max.	Operating Temperature	-40 to +105°C
Return Loss	9.5 dB min.	Recommended	+5 ~ +35°C, Humidity
Attenuation (min.)	15 dB @ 100 -1800 MHz	Storage Conditions	45~75%RH, 12 mos. Max*
Attenuation (min.)	20 dB @ 3400 - 11700 MHz	Reel Quantity	4,000


* - 1 yr shelf life in bag; 1 week shelf life out of bag; Vacuum reseal unused reel

Part Number Explanation

P/N Suffix	Packing Style	Bulk	Suffix = S	eg. 2500BP15M400S
		T & R	Suffix = E	eg. 2500BP15M400E
		100% Tin	Suffix = None	eg. 2500BP15M400(E or S)
	Termination style	Tin / Lead	Suffix = /Pb	eg. 2500BP15M400(E or S)/Pb


Mechanical Dimensions

	In	mm
L	0.079 ± 0.006	2.00 ± 0.15
W	0.049 ± 0.004	1.25 ± 0.10
T	0.037 ± 0.004	0.95 ± 0.10
a	0.049 ± 0.006	1.25 ± 0.15
b	0.012 ± 0.006	0.30 ± 0.15
c	0.010 + 0.006	0.25 + 0.15
g	0.014 + 0.006	0.35 + 0.15

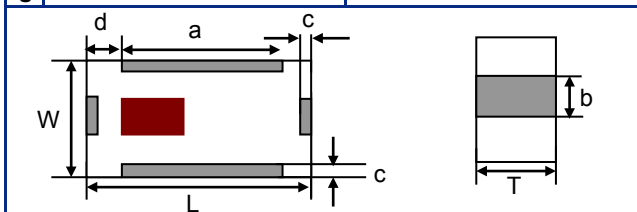

Terminal Configuration


No.	Function
1	GND
2	OUT
3	GND
4	IN

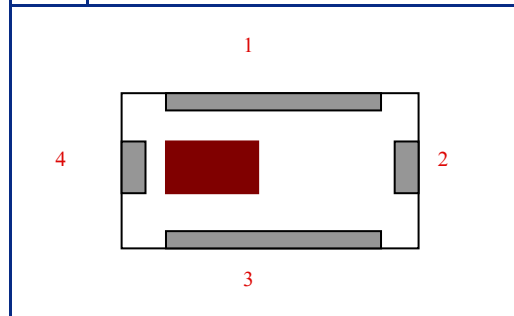

Mounting Considerations

Mount these devices with brown mark facing up.
 *Line width should be designed to provide 50 Ω impedance matching characteristics.

Units: mm

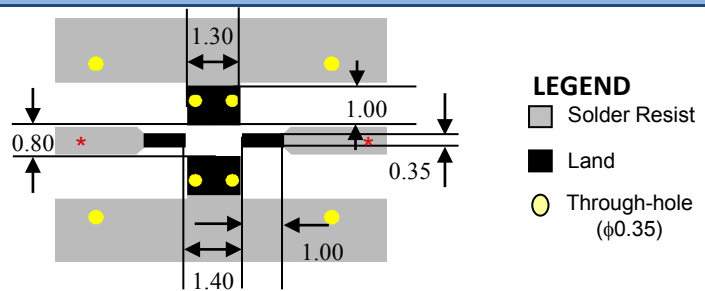

"High Frequency Ceramic Solutions"

2.5 GHz Band Pass Filter

P/N 2500BP15M400


Detail Specification: 1/18/2019

Page 2 of 3

Typical Electrical Performance (T=25°C)



Measurement Diagram

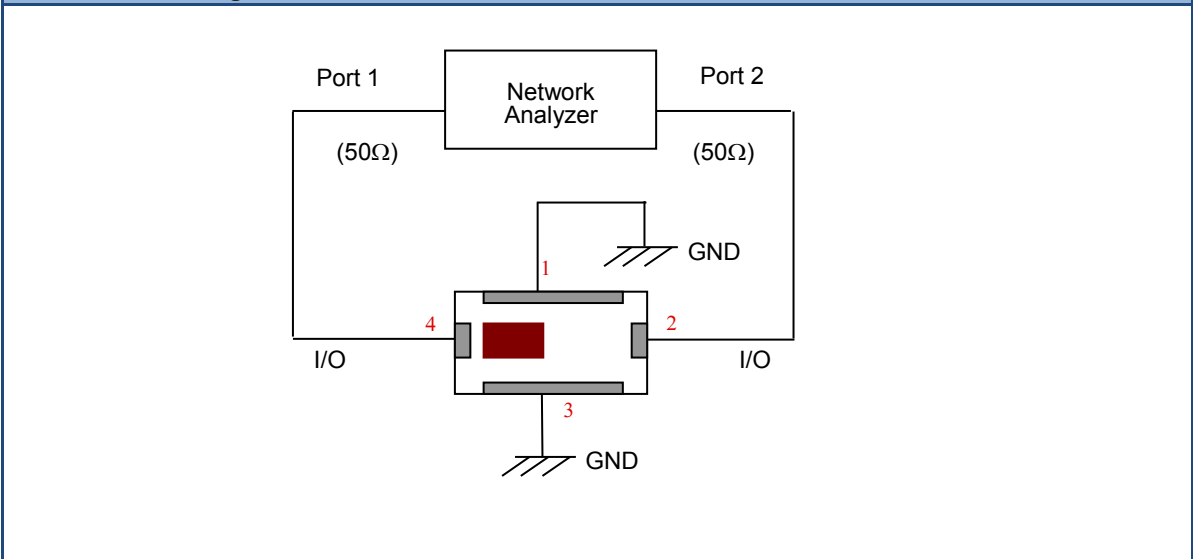

Johanson Technology, Inc. reserves the right to make design changes without notice. Please confirm the specifications and delivery conditions when placing your order. All sales are subject to Johanson Technology, Inc. terms and conditions.

High Frequency Ceramic Solutions

2.5 GHz Band Pass Filter

P/N 2500BP15M400

Detail Specification: 1/18/2019

Page 3 of 3

Application Notes, Layout Files, and more

<https://www.johansontechnology.com/band-pass-filters>

Packaging information

<https://www.johansontechnology.com/tape-reel-packaging>

Soldering Information

<https://www.johansontechnology.com/ipcsoldering-profile>

MSL Info

<https://www.johansontechnology.com/msl-rating>

Recommended Storage Condition and Max Shelf Life

<https://www.johansontechnology.com/recommended-storage-conditions>

RoHS Compliance

<https://www.johansontechnology.com/rohs-compliance>

Antenna layout and tuning techniques


<https://www.johansontechnology.com/tuning>

Antenna layout review, tuning, and characterization services





<https://www.johansontechnology.com/ipc-antenna-services>

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View 2500BP15M400E on WIN SOURCE](#)
-  [Johanson Technology Inc. Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management