



**THE DATASHEET OF  
SK14E3/TR13**



**SK12  
thru  
SK110**

**Features**

- Schottky Barrier Rectifier
- Guard Ring Protection
- Low Forward Voltage
- Reverse Energy Tested
- High Current Capability
- Extremely Low Thermal Resistance

**1 Amp Schottky  
Rectifier  
20 - 100 Volts**

**Maximum Ratings**

- Operating Temperature: -65°C to +175°C
- Storage Temperature: -65°C to +175°C
- Maximum Thermal Resistance; 15°C/W Junction To Lead


Microsemi Catalog Number	Device Marking	Maximum Recurrent Peak Reverse Voltage	Maximum RMS Voltage	Maximum DC Blocking Voltage
SMB5817	SK12	20V	14V	20V
SMB5818	SK13	30V	21V	30V
SMB5819	SK14	40V	28V	40V
SMBSR105	SK15	50V	35V	50V
SMBSR106	SK16	60V	42V	60V
SMBSR108	SK18	80V	56V	80V
SMBSR1010	SK110	100V	70V	100V

**Electrical Characteristics @ 25°C Unless Otherwise Specified**

Average Forward Current	$I_{F(AV)}$	1.0A	$T_J = 90^\circ\text{C}$
Peak Forward Surge Current	$I_{FSM}$	50A	8.3ms, half sine
Maximum Instantaneous Forward Voltage	$V_F$	SK12 .45V SK13 .55V SK14 .60V SK15-16 .72V SK18-110 .80V	$I_{FM} = 1.0A$ ; $T_J = 25^\circ\text{C}^*$
Maximum DC Reverse Current At Rated DC Blocking Voltage	$I_R$	.5mA	$T_J = 25^\circ\text{C}$
Typical Junction Capacitance	$C_J$	SK12 230pF SK13-SK110 50pF	Measured at 1.0MHz, $V_R=4.0V$

\*Pulse test: Pulse width 300  $\mu\text{sec}$ , Duty cycle 2%


**DO-214AA  
(SMBJ)**

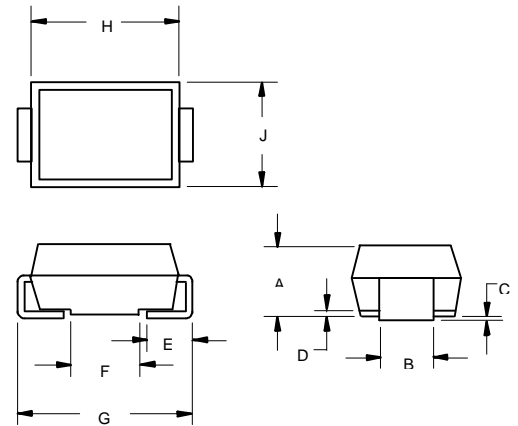

DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	.075	.115	1.90	2.92	1
B	.081	.087	2.06	2.21	
C	.004	.008	.10	.20	
D	---	.02	---	.51	
E	.030	.060	.76	1.52	
F	.065	.084	1.65	2.13	
G	.205	.220	5.21	5.59	
H	.160	.180	4.06	4.57	
J	.130	.155	3.30	3.94	


1) Maximum Jeduc Spec is .096" or 2.44 MM

**SUGGESTED SOLDER  
PAD LAYOUT**

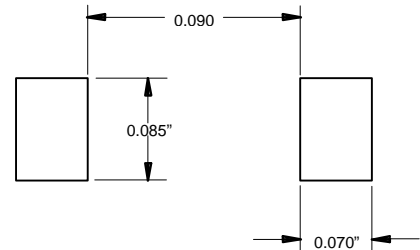


# SK12

Figure 1  
Typical Forward Characteristics

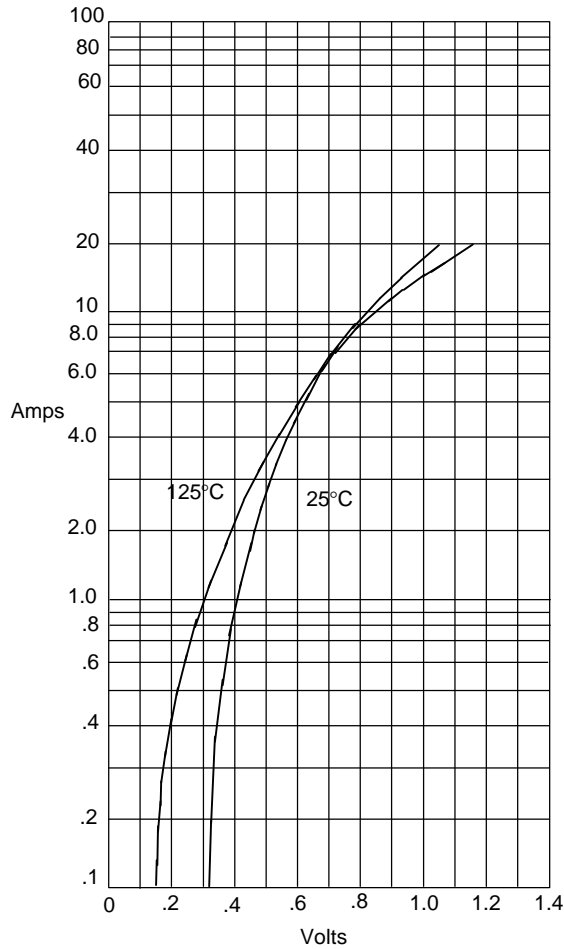


Instantaneous Forward Current - Amperes versus  
Instantaneous Forward Voltage - Volts

Figure 2  
Typical Reverse Characteristics

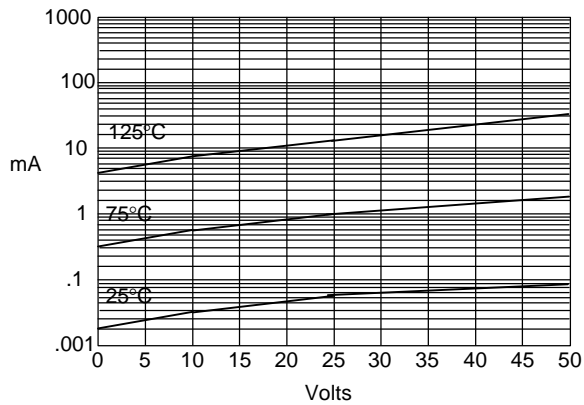


Typical Reverse Current - mA versus  
Reverse Voltage - Volts

Figure 3  
Typical Junction Capacitance

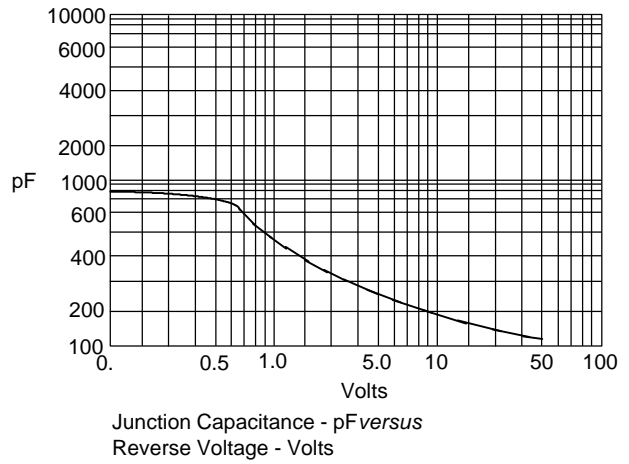


Junction Capacitance - pF versus  
Reverse Voltage - Volts




# SK13 thru SK110

Figure 1  
Typical Forward Characteristics

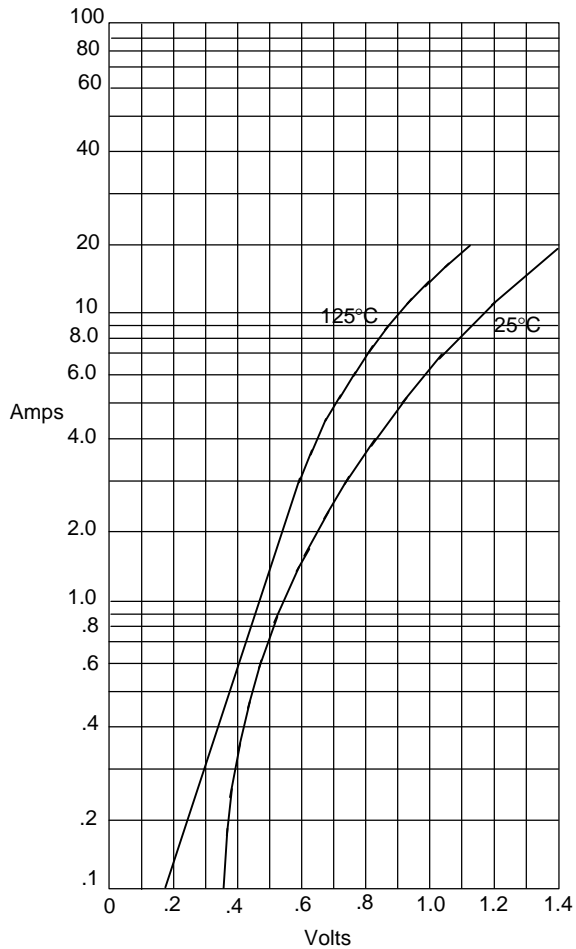


Instantaneous Forward Current - Amperes versus  
Instantaneous Forward Voltage - Volts

Figure 2  
Typical Reverse Characteristics

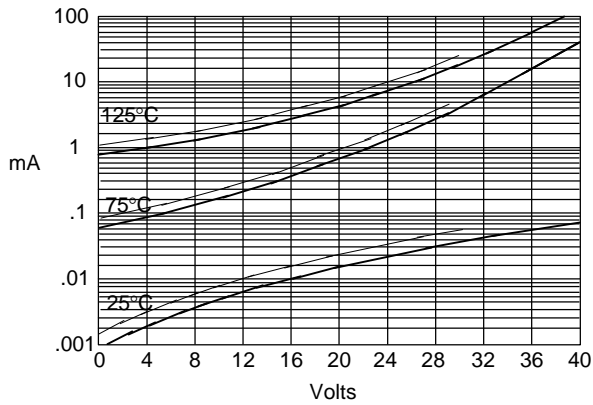


Typical Reverse Current - mA versus  
Reverse Voltage - Volts

Figure 3  
Typical Junction Capacitance

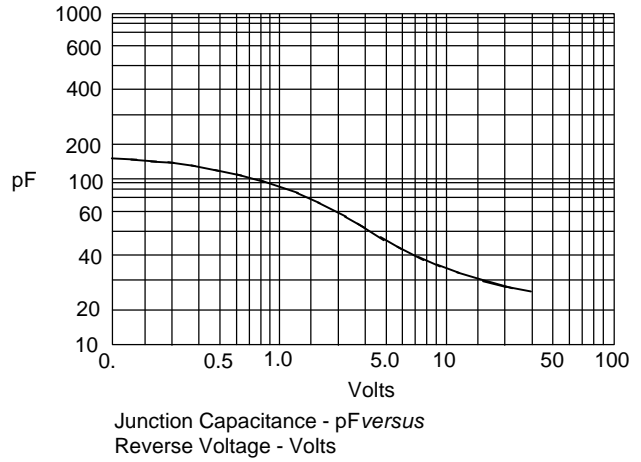

Junction Capacitance - pF versus  
Reverse Voltage - Volts



SK13 ———  
SK14 - - - -

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View SK14E3/TR13 on WIN SOURCE](#)

 [Microsemi Corporation](#) Information

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management