




2.0×1.6mm for Consumer Products/ Mobile Communications

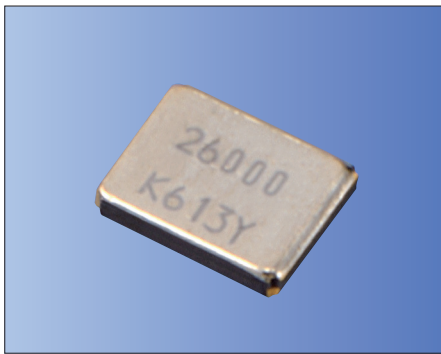

RoHS Compliant

Features

- Crystal unit for Consumer Products
- Ultra-miniature and low profile (2.0×1.6×0.40mm)
- Ceramic package
- Reflow compatible

Applications

- Digital Electronics
- Consumer Products
- Mobile Communications, Bluetooth\*, Wireless LAN

\* Bluetooth\* Trademarks are owned by Bluetooth SIG Inc.

How to Order

CX2016DB 27000 D0 G □ J CC  
① ② ③ ④ ⑤ ⑥ ⑦

- ① Series
  - ② Frequency
  - ③ Load Capacitance
  - ④ Frequency Tolerance
  - ⑤ Operating Temp. Range
  - ⑥ Frequency Temp. Stability
- |    |              |   |                      |
|----|--------------|---|----------------------|
| D0 | 8 pF         | G | ±15×10 <sup>-6</sup> |
| EJ | -10 to +70°C |   | ±15×10 <sup>-6</sup> |
| LN | -30 to +85°C |   | ±25×10 <sup>-6</sup> |

⑦ Individual Specification (STD Specification is "CC")

Packaging (Tape & Reel 1000/ 3000/ 15000 pcs./ reel)

Specifications

Item	Symbol	Specification	Units	Remarks
Frequency Range	f <sub>nom</sub>	16000 to 60000	kHz	
Overtone Order	OT	Fundamental	—	
Load Capacitance	CL	8	pF	Please contact us for other CL requirements.
Frequency Tolerance	f <sub>tol</sub>	±15	×10 <sup>-6</sup>	25°C±3°C
Motional Series Resistance	R1	Table 1	ohm	
Drive Level	DL	Table 2	μW	
Operating Temp. Range	T <sub>use</sub>	-10 to +70	°C	-30 to +85
Storage Temp. Range	T <sub>stg</sub>	-40 to +85	°C	
Frequency Temp. Characteristics	f <sub>tem</sub>	±15	×10 <sup>-6</sup>	Freq. deviation from the value at 25°C

Please contact us for other specifications.

Table 1 Motional Series Resistance


Frequency Range	Motional Series Resistance
16000≤f <sub>nom</sub> <18000kHz	200Ω max.
18000≤f <sub>nom</sub> <26000kHz	150Ω max.
26000≤f <sub>nom</sub> <40000kHz	60Ω max.
40000≤f <sub>nom</sub> ≤60000kHz	50Ω max.

Table 2 Level of Drive

Frequency Range	Level of Drive
16000≤f <sub>nom</sub> ≤60000kHz	10μW (100μW max.)


Dimensions

(Unit: mm)

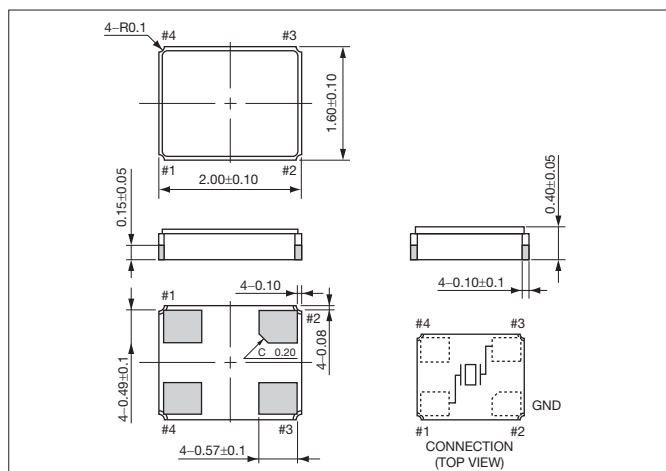

Recommended Land Pattern

(Unit: mm)

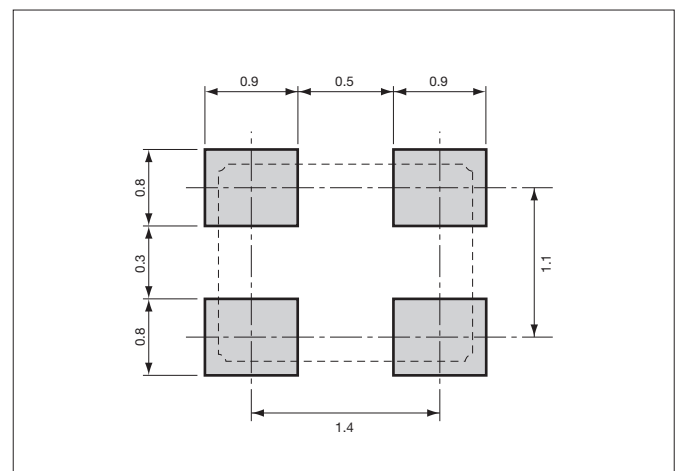

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- ⊖ [View CX2016DB48000C0WLLA1 on WIN SOURCE](#)
- ⊖ [AVX Corp/Kyocera Corp Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management