



THE DATASHEET OF MS-162A



ITS-P-07027W




MS-162A Series

RF switch for interface use

Low profile
2.5 mm Max.


Light weight
0.043 g

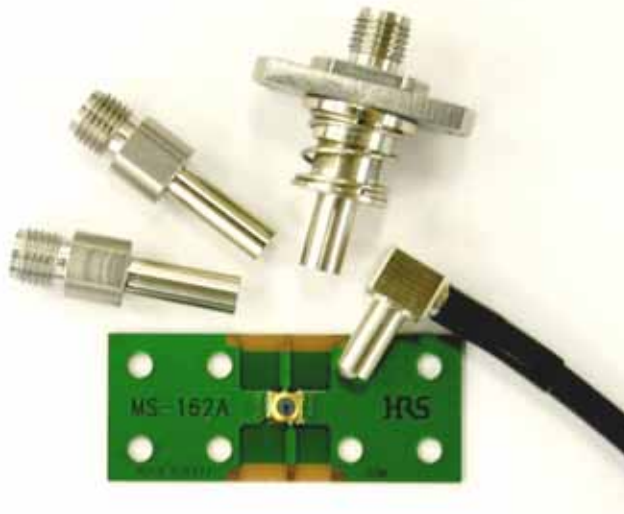

◆ Features

◆ Small size



1. Small size: 2.48 x 3.1 x 3.5 mm
 Occupied mounting area: 3.5 x 4.0 mm
2. Light weight: 0.043 g
3. Durability: 12,000 cycles
4. High electrical performance up to 10 GHz
5. Wide self alignment: ± 0.5 mm
6. Satisfies RoHS requirements
 Halogen-free*, Beryllium-free product

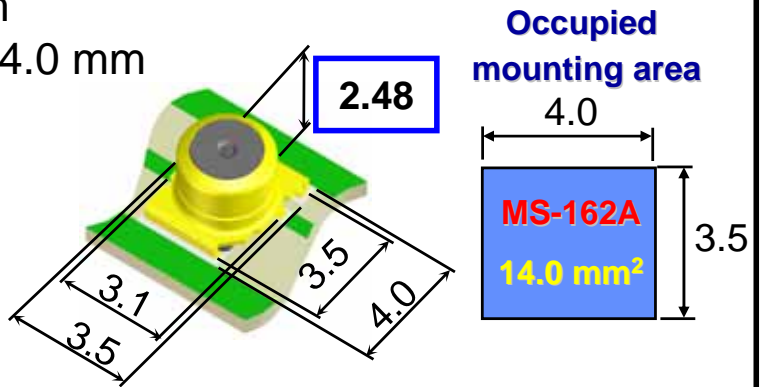

◆ V.S.W.R & Insertion Loss (Typical data)

Normally closed (Unmated condition)

Normally open (Mated condition**)

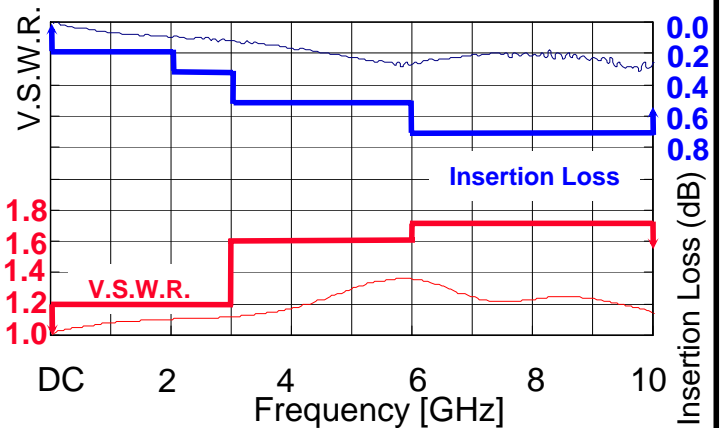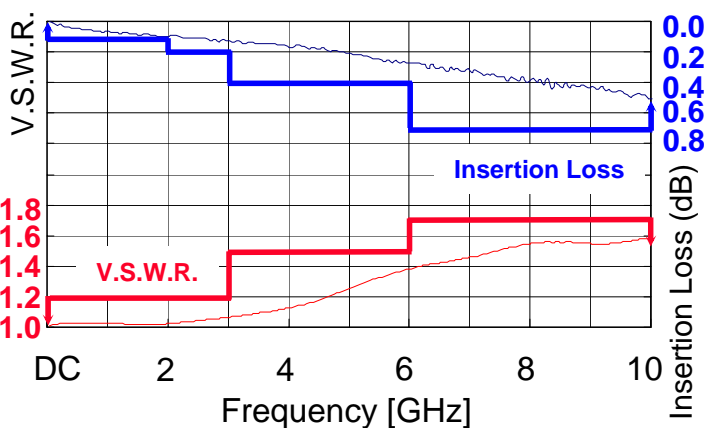

**Tested in the mated condition with MS-162-HRMJ-1.

*MS-162A is defined as halogen-free product in accordance with IEC61249-2-21.
 (Br: 900 ppm Max., Cl: 900 ppm Max., total concentration of Br and Cl: below 1500 ppm)

Specifications herein are subject to change without notice. Contact Hirose for latest specifications, drawings or availabilities.

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View MS-162A on WIN SOURCE](#)
-  [Hirose Electric Co Ltd Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management