




**THE DATASHEET OF  
ADS7826IDRBTG4**





## 10/8/12-BIT HIGH SPEED 2.7 V microPOWER™ SAMPLING ANALOG-TO-DIGITAL CONVERTER

### FEATURES

- **High Throughput at Low Supply Voltage (2.7 V  $V_{CC}$ )**
  - ADS7829: 12-bit 125 KSPS
  - ADS7826: 10-bit 200 KSPS
  - ADS7827: 8-bit 250 KSPS
- **Very Wide Operating Supply VoltageL: 2.7 V to 5.25 V (as Low as 2.0 V With Reduced Performance)**
- **Rail-to-Rail, Pseudo Differential Input**
- **Wide Reference Voltage: 50 mV to  $V_{CC}$**
- **Micropower Auto Power-Down:**
  - Less Than 60  $\mu$ W at 75 kHz, 2.7 V  $V_{CC}$
- **Low Power Down Current: 3  $\mu$ A Max**
- **Ultra Small Chip Scale Package:** 8-pin 3 x 3 PDSO (SON, Same Size as QFN)
- **SPI™ Compatible Serial Interface**

### APPLICATIONS


- Battery Operated Systems
- Remote Data Acquisition
- Isolated Data Acquisition
- Simultaneous Sampling, Multichannel Systems

### DESCRIPTION

The ADS7826/27/29 is a family of 10/8/12-bit sampling analog-to-digital converters (A/D) with assured specifications at 2.7-V supply voltage. It requires very little power even when operating at the full sample rate. At lower conversion rates, the high speed of the device enables it to spend most of its time in the power down mode—the power dissipation is less than 60  $\mu$ W at 7.5 kHz.

The ADS7826/27/29 also features operation from 2.0 V to 5 V, a synchronous serial interface, and a differential input. The reference voltage can be set to any level within the range of 50 mV to  $V_{CC}$ .

Ultra-low power and small package size make the ADS7826/27/29 family ideal for battery operated systems. It is also a perfect fit for remote data acquisition modules, simultaneous multichannel systems, and isolated data acquisition. The ADS7826/27/29 family is available in a 3 x 3 8-pin PDSO (SON, same size as QFN) package.

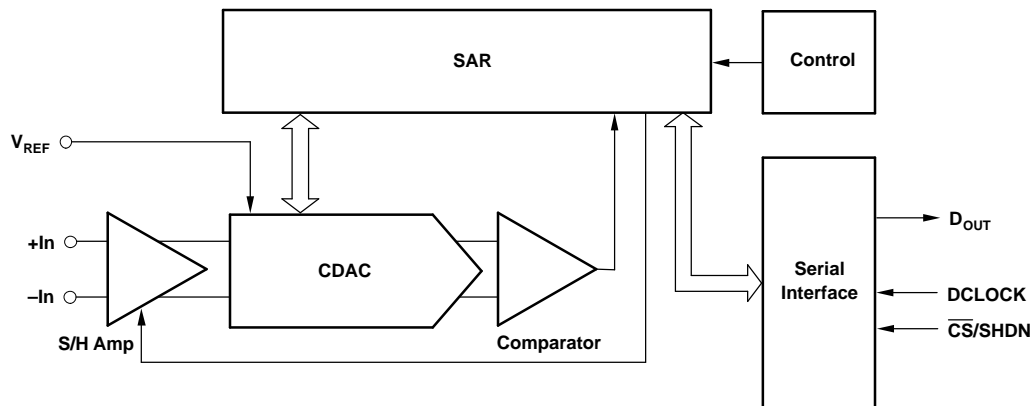

microPOWER is a trademark of Texas Instruments.



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.



These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

## PACKAGE/ORDERING INFORMATION

| PRODUCT   | MAXIMUM LINERARITY ERROR (LSB) |              | PACKAGE (1) | SPECIFICATION TEMPERATURE RANGE | PACKAGE MARKING (2) | ORDERING NUMBER | TRANSPORT MEDIA |
|-----------|--------------------------------|--------------|-------------|---------------------------------|---------------------|-----------------|-----------------|
|           | INTEGRAL                       | DIFFERENTIAL |             |                                 |                     |                 |                 |
| ADS7829I  | ±2                             | ±2           | SON-8       | -40°C to 85°C                   | F29                 | ADS7829IDRBR    | Tape and reel   |
| ADS7829IB | ±1.25                          | -1/1.25      | SON-8       | -40°C to 85°                    | F29                 | ADS7829IBDRBR   | Tape and reel   |
| ADS7826I  | ±1                             | ±1           | SON-8       | -40°C to 85°C                   | F26                 | ADS7826IDRBR    | Tape and reel   |
| ADS7827I  | ±1                             | ±1           | SON-8       | -40°C to 85°C                   | F27                 | ADS7827IDRBR    | Tape and reel   |
| ADS7829I  | ±2                             | ±2           | SON-8       | -40°C to 85°C                   | F29                 | ADS7829IDRBT    | Tape and reel   |
| ADS7829IB | ±1.25                          | -1/1.25      | SON-8       | -40°C to 85°C                   | F29                 | ADS7829IBDRBT   | Tape and reel   |
| ADS7826I  | ±1                             | ±1           | SON-8       | -40°C to 85°C                   | F26                 | ADS7826IDRBT    | Tape and reel   |
| ADS7827I  | ±1                             | ±1           | SON-8       | -40°C to 85°C                   | F27                 | ADS7827IDRBT    | Tape and reel   |

- (1) For detail drawing and dimension table, see end of this data sheet or package drawing file on web.  
 (2) Performance Grade information is marked on the reel.

## ABSOLUTE MAXIMUM RATINGS

over operating free-air temperature range (unless otherwise noted) (1)

|                            |                                     |
|----------------------------|-------------------------------------|
| V <sub>CC</sub>            | 6 V                                 |
| Analog input               | -0.3 V to (V <sub>CC</sub> + 0.3 V) |
| Logic input                | -0.3 V to 6 V                       |
| Case temperature           | 100°C                               |
| Junction temperature       | 150°C                               |
| Storage temperature        | 125°C                               |
| External reference voltage | 5.5 V                               |

- (1) Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

## SPECIFICATIONS

At -40°C to 85°C,  $V_{CC} = 2.7\text{ V}$ ,  $V_{ref} = 2.5\text{ V}$ , unless otherwise specified.

| PARAMETER                           | TEST CONDITIONS  | ADS7829IB    |           |                | ADS7829      |           |                | ADS7826I     |           |                | ADS7827I     |           |                | UNIT             |
|-------------------------------------|--|--------------|-----------|----------------|--------------|-----------|----------------|--------------|-----------|----------------|--------------|-----------|----------------|------------------|
|                                     |  | MIN          | TYP       | MAX            | MIN          | TYP       | MAX            | MIN          | TYP       | MAX            | MIN          | TYP       | MAX            |                  |
| <b>ANALOG INPUT</b>                 |  |              |           |                |              |           |                |              |           |                |              |           |                |                  |
| Full-scale input span               | +In - (-In)  | 0            |           | $V_{ref}$      | 0            |           | $V_{ref}$      | 0            |           | $V_{ref}$      | 0            |           | $V_{ref}$      | V                |
| Absolute input range                | +In  | -0.2         |           | $V_{CC} + 0.2$ | -0.2         |           | $V_{CC} + 0.2$ | -0.2         |           | $V_{CC} + 0.2$ | -0.2         |           | $V_{CC} + 0.2$ | V                |
|                                     | -IN  | -0.2         |           | 1.0            | -0.2         |           | 1.0            | -0.2         |           | 1.0            | -0.2         |           | 1.0            | V                |
| Capacitance                         |  | 25           |           |                | 25           |           |                | 25           |           |                | 25           |           |                | pF               |
| Leakage current                     |  | $\pm 1$      |           |                | $\pm 1$      |           |                | $\pm 1$      |           |                | $\pm 1$      |           |                | $\mu\text{A}$    |
| <b>SYSTEM PERFORMANCE</b>           |  |              |           |                |              |           |                |              |           |                |              |           |                |                  |
| Resolution                          |  | 12           |           |                | 12           |           |                | 10           |           |                | 8            |           |                | Bits             |
| No missing codes                    |  | 12           |           |                | 11           |           |                | 10           |           |                | 8            |           |                | Bits             |
| Integral linearity error            |  | -1.25        | $\pm 0.4$ | 1.25           | -2           | $\pm 0.8$ | 2              | -1           | $\pm 0.3$ | 1              | -1           | $\pm 0.2$ | 1              | LSB (1)          |
| Differential linearity error        |  | -1           | $\pm 0.4$ | 1.25           | -2           | $\pm 0.8$ | 2              | -1           | $\pm 0.3$ | 1              | -1           | $\pm 0.2$ | 1              | LSB              |
| Offset error                        |  | -3           | $\pm 0.3$ | 3              | -3           | $\pm 0.6$ | 3              | -2           | $\pm 0.4$ | 2              | -1           | $\pm 0.4$ | 1              | LSB              |
| Gain error                          |  | -2           | $\pm 0.3$ | 2              | -2           | $\pm 0.6$ | 2              | -1           | $\pm 0.3$ | 1              | -1           | $\pm 0.2$ | 1              | LSB              |
| Noise                               |  | 33           |           |                | 33           |           |                | 33           |           |                | 33           |           |                | $\mu\text{Vrms}$ |
| Power supply rejection              |  | 82           |           |                | 82           |           |                | 94           |           |                | 98           |           |                | dB               |
| <b>SAMPLING DYNAMICS</b>            |  |              |           |                |              |           |                |              |           |                |              |           |                |                  |
| Conversion time                     |  | 12           |           |                | 12           |           |                | 10           |           |                | 8            |           |                | DCLOCK Cycles    |
| Acquisition time                    |  | 1.5          |           |                | 1.5          |           |                | 1.5          |           |                | 1.5          |           |                | DCLOCK Cycles    |
| $f_{DCLOCK}$                        |  | 16 x fsample |           |                | 16 x fsample |           |                | 14 x fsample |           |                | 12 x fsample |           |                | kHz              |
| Throughput (sample rate)<br>fsample | $2.7\text{ V} \leq V_{CC} \leq 5.25\text{ V}$ (2)            | 125          |           |                | 125          |           |                | 200          |           |                | 250          |           |                | kHz              |
|                                     | $2.0\text{ V} \leq V_{CC} < 2.7\text{ V}$ (3) (2)            | 75           |           |                | 75           |           |                | 85           |           |                | 100          |           |                | kHz              |
| <b>DYNAMIC CHARACTERISTICS</b>      |  |              |           |                |              |           |                |              |           |                |              |           |                |                  |
| Total harmonic distortion           |  | -82          |           |                | -80          |           |                | -78          |           |                | -72          |           |                | dB               |
| SINAD                               | $V_{IN} = 2.5\text{ Vpp}$ at 1 kHz                           | 72           |           |                | 70           |           |                | 62           |           |                | 50           |           |                | dB               |
| Spurious free dynamic range (SFDR)  | $V_{IN} = 2.5\text{ Vpp}$ at 1 kHz                           | 85           |           |                | 82           |           |                | 81           |           |                | 68           |           |                | dB               |
| <b>REFERENCE INPUT</b>              |  |              |           |                |              |           |                |              |           |                |              |           |                |                  |
| Voltage range                       | $2.7\text{ V} \leq V_{CC} \leq 3.6\text{ V}$                 | 0.05         |           | $V_{CC} - 0.2$ | 0.05         |           | $V_{CC} - 0.2$ | 0.05         |           | $V_{CC} - 0.2$ | 0.05         |           | $V_{CC} - 0.2$ | V                |
| Resistance                          | $\overline{CS} = \text{GND}$ ,<br>$f_{SAMPLE} = 0\text{ Hz}$ | 5            |           |                | 5            |           |                | 5            |           |                | 5            |           |                | $\text{G}\Omega$ |
|                                     | $\overline{CS} = V_{CC}$                                     | 5            |           |                | 5            |           |                | 5            |           |                | 5            |           |                | $\text{G}\Omega$ |
| Current drain                       | Full speed at $V_{ref}/2$                                    | 12           |           | 60             | 12           |           | 60             | 20           |           | 100            | 24           |           | 120            | $\mu\text{A}$    |
|                                     | $f_{SAMPLE} = 7.5\text{ kHz}$                                | 0.8          |           |                | 0.8          |           |                | 0.8          |           |                | 0.8          |           |                | $\mu\text{A}$    |
|                                     | $\overline{CS} = V_{CC}$                                     | 0.001        |           | 3              | 0.001        |           | 3              | 0.001        |           | 3              | 0.001        |           | 3              | $\mu\text{A}$    |
| <b>DIGITAL INPUT/OUTPUT</b>         |  |              |           |                |              |           |                |              |           |                |              |           |                |                  |
| Logic family                        |  | CMOS         |           |                | CMOS         |           |                | CMOS         |           |                | CMOS         |           |                |                  |
| Logic levels                        |  |              |           |                |              |           |                |              |           |                |              |           |                |                  |
| $V_{IH}$                            | $I_{IH} = +5\ \mu\text{A}$                                   | 2.0          |           | 5.5            | 2.0          |           | 5.5            | 2.0          |           | 5.5            | 2.0          |           | 5.5            | V                |
| $V_{IL}$                            | $I_{IL} = +5\ \mu\text{A}$                                   | -0.3         |           | 0.8            | -0.3         |           | 0.8            | -0.3         |           | 0.8            | -0.3         |           | 0.8            | V                |

- (1) LSB means Least Significant Bit and is equal to  $V_{ref} / 2^N$  where N is the resolution of ADC. For example, with  $V_{ref}$  equal to 2.5 V, one LSB is 0.61 mV for a 12 bit ADC (ADS7829).
- (2) See the Typical Performance Curves for  $V_{CC} = 5\text{ V}$  and  $V_{ref} = 5\text{ V}$ .
- (3) The maximum clock rate of the ADS7826/27/29 are less than 1.2 MHz at  $2\text{ V} \leq V_{CC} < 2.7\text{ V}$ . The recommended reference voltage is between 1.25 V to 1.024 V.

**SPECIFICATIONS (continued)**

At -40°C to 85°C,  $V_{CC} = 2.7\text{ V}$ ,  $V_{ref} = 2.5\text{ V}$ , unless otherwise specified.

| PARAMETER                        | TEST CONDITIONS                    | ADS7829IB       |     |      | ADS7829         |     |      | ADS7826I        |     |      | ADS7827I        |     |      | UNIT          |
|----------------------------------|------------------------------------|-----------------|-----|------|-----------------|-----|------|-----------------|-----|------|-----------------|-----|------|---------------|
|                                  |                                    | MIN             | TYP | MAX  | MIN             | TYP | MAX  | MIN             | TYP | MAX  | MIN             | TYP | MAX  |               |
| $V_{OH}$                         | $I_{OH} = -250\ \mu\text{A}$       | 2.2             |     |      | 2.1             |     |      | 2.1             |     |      | 2.1             |     |      | V             |
| $V_{OL}$                         | $I_{OL} = 250\ \mu\text{A}$        |                 |     | 0.4  |                 |     | 0.4  |                 |     | 0.4  |                 |     | 0.4  | V             |
| Data format                      |                                    | Straight binary |     |      | Straight binary |     |      | Straight binary |     |      | Straight binary |     |      |               |
| <b>POWER SUPPLY REQUIREMENTS</b> |                                    |                 |     |      |                 |     |      |                 |     |      |                 |     |      |               |
| VCC                              | Operating range                    | 2.7             |     | 3.6  | 2.7             |     | 3.6  | 2.7             |     | 3.6  | 2.7             |     | 3.6  | V             |
|                                  | See (3) and (2)                    | 2.0             |     | 2.7  | 2.0             |     | 2.7  | 2.0             |     | 2.7  | 2.0             |     | 2.7  | V             |
|                                  | See (2)                            | 3.6             |     | 5.25 | 3.6             |     | 5.25 | 3.6             |     | 5.25 | 3.6             |     | 5.25 | V             |
| Quiescent current                | Full speed (4)                     |                 | 220 | 350  |                 | 220 | 350  |                 | 250 | 350  |                 | 260 | 350  | $\mu\text{A}$ |
|                                  | $f_{SAMPLE} = 7.5\text{ kHz}$ (5), |                 | 20  |      |                 | 20  |      |                 | 20  |      |                 | 20  |      | $\mu\text{A}$ |
|                                  | $f_{SAMPLE} = 7.5\text{ kHz}$ (6)  |                 | 180 |      |                 | 180 |      |                 | 180 |      |                 | 180 |      | $\mu\text{A}$ |
| Power down                       | $\overline{CS} = V_{CC}$           |                 |     | 3    |                 |     | 3    |                 |     | 3    |                 |     | 3    | $\mu\text{A}$ |
| <b>TEMPERATURE RANGE</b>         |                                    |                 |     |      |                 |     |      |                 |     |      |                 |     |      |               |
| Specified performance            |                                    | -40             |     | 85   | -40             |     | 85   | -40             |     | 85   | -40             |     | 85   | °C            |

- (4) Full speed: 125 kpsps for ADS7829, 200 kpsps for ADS7826, and 250 kpsps for ADS7827.
- (5)  $f_{DCLOCK} = 1.2\text{ MHz}$ ,  $\overline{CS} = V_{CC}$  for 145 clock cycles out of every 160 for the ADS7829I and ADS7829IB.
- (6) See the Power Dissipation section for more information regarding lower sample rates.


At -40°C to 85°C,  $V_{CC} = 5\text{ V}$ ,  $V_{ref} = 5\text{ V}$ , unless otherwise specified.

| PARAMETER                    | TEST CONDITIONS | ADS7829IB |           |          | ADS7829 |           |          | ADS7826I |            |          | ADS7827I |           |          | UNIT    |
|------------------------------|-----------------|-----------|-----------|----------|---------|-----------|----------|----------|------------|----------|----------|-----------|----------|---------|
|                              |                 | MIN       | TYP       | MAX      | MIN     | TYP       | MAX      | MIN      | TYP        | MAX      | MIN      | TYP       | MAX      |         |
| <b>SYSTEM PERFORMANCE</b>    |                 |           |           |          |         |           |          |          |            |          |          |           |          |         |
| Resolution                   |                 |           | 12        |          |         | 12        |          |          | 10         |          |          | 8         |          | Bits    |
| No missing codes             |                 |           | 12        |          |         | 11        |          |          | 10         |          |          | 8         |          | Bits    |
| Integral linearity error     |                 |           | $\pm 0.6$ |          |         | $\pm 0.8$ |          |          | $\pm 0.15$ |          |          | $\pm 0.1$ | 1        | LSB (7) |
| Differential linearity error |                 |           | $\pm 0.5$ |          |         | $\pm 0.8$ |          |          | $\pm 0.15$ |          |          | $\pm 0.1$ | 1        | LSB     |
| <b>ANALOG INPUT</b>          |                 |           |           |          |         |           |          |          |            |          |          |           |          |         |
| Offset error                 |                 |           | $\pm 2.6$ |          |         | $\pm 2.6$ |          |          | $\pm 1.2$  |          |          | $\pm 0.7$ |          | LSB     |
| Gain error                   |                 |           | $\pm 1.2$ |          |         | $\pm 1.2$ |          |          | $\pm 0.2$  |          |          | $\pm 0.1$ |          | LSB     |
| <b>REFERENCE INPUT</b>       |                 |           |           |          |         |           |          |          |            |          |          |           |          |         |
| Voltage range                |                 |           | 0.05      | $V_{CC}$ |         | 0.05      | $V_{CC}$ |          | 0.05       | $V_{CC}$ |          | 0.05      | $V_{CC}$ | V       |

- (7) LSB means Least Significant Bit . With  $V_{ref}$  equal to 5 V, one LSB is 1.22 mV for a 12 bit ADC.

## DEVICE INFORMATION

### PIN DESCRIPTION PDSO (SON-8) PACKAGE (TOP VIEW)



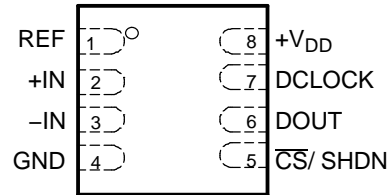


### Terminal Functions

| PIN | NAME                         | DESCRIPTION  |
|-----|------------------------------|--|
| 1   | V <sub>ref</sub>             | Reference input  |
| 2   | +In                          | Noninverting input   |
| 3   | -In                          | Inverting input. Connect to ground or to remote ground sense point.  |
| 4   | GND                          | Ground   |
| 5   | $\overline{\text{CS}}$ /SHDN | Chip select when LOW, shutdown mode when HIGH  |
| 6   | DOUT                         | The serial output data word is comprised of 12 bits of data. In operation the data is valid on the falling edge of DCLOCK. The second clock pulse after the falling edge of $\overline{\text{CS}}$ enables the serial output. After one null bit, the data is valid for the next 12 edges. |
| 7   | DCLOCK                       | Data Clock synchronizes the serial data transfer and determines conversion speed.  |
| 8   | +V <sub>CC</sub>             | Power supply   |




### TYPICAL CHARACTERISTICS

At  $T_A = 25^\circ\text{C}$ ,  $V_{CC} = 2.7\text{ V}$ ,  $V_{ref} = 25\text{ V}$ , (unless otherwise specified)

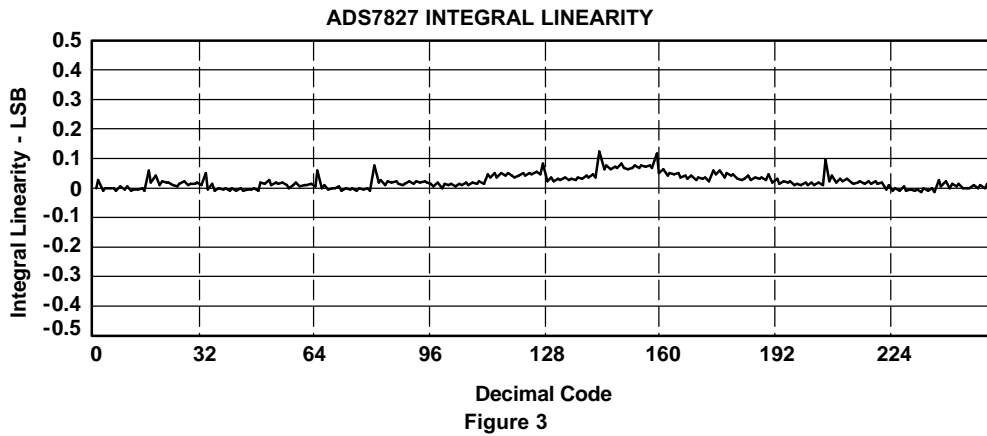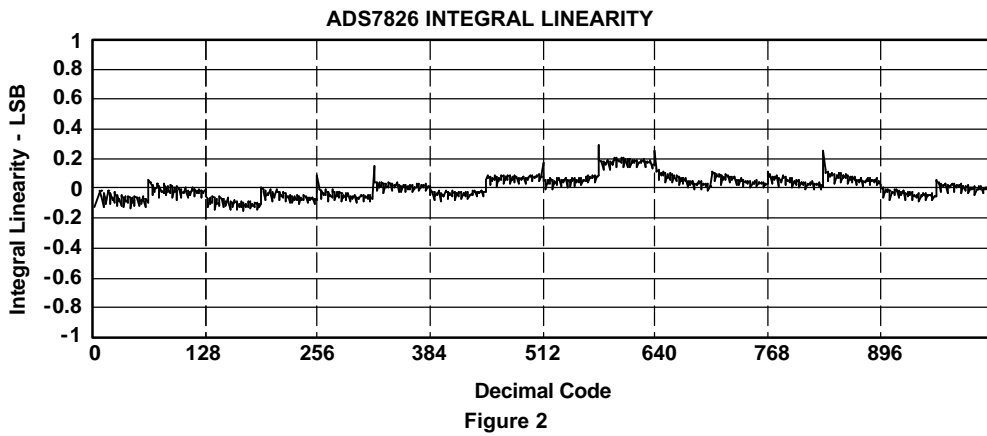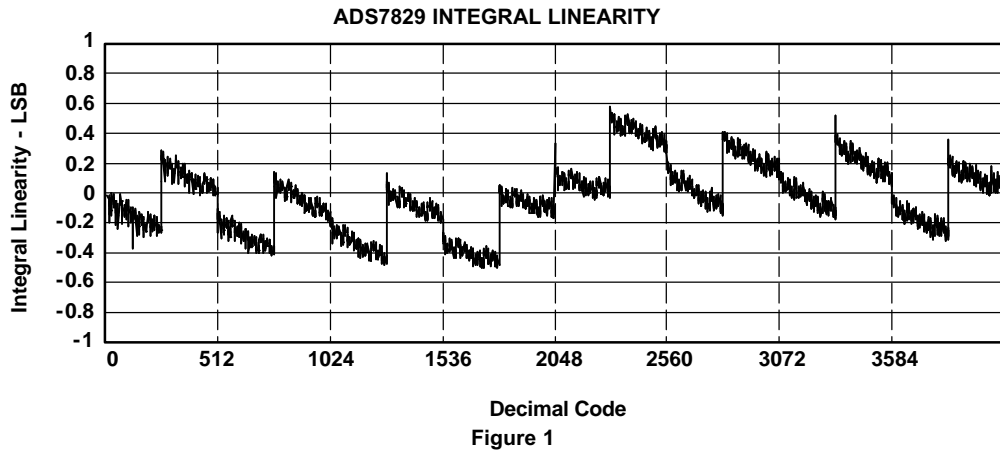

### TYPICAL CHARACTERISTICS (continued)

At  $T_A = 25^\circ\text{C}$ ,  $V_{CC} = 2.7\text{ V}$ ,  $V_{ref} = 25\text{ V}$ , (unless otherwise specified)

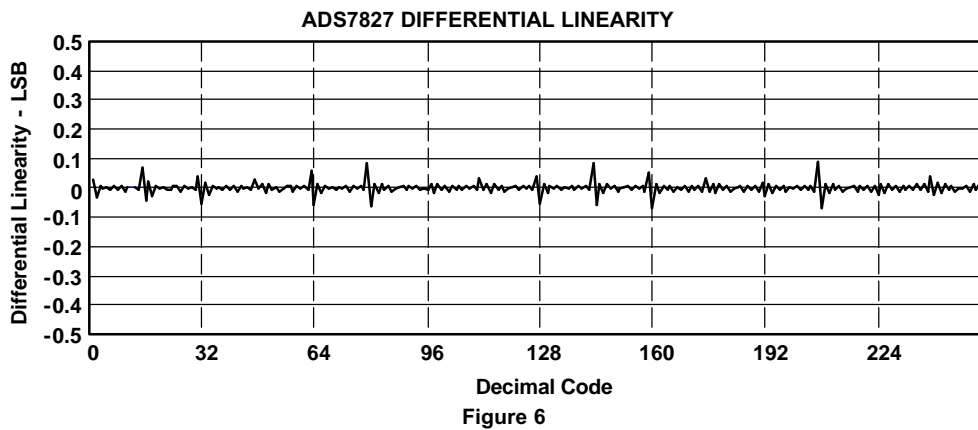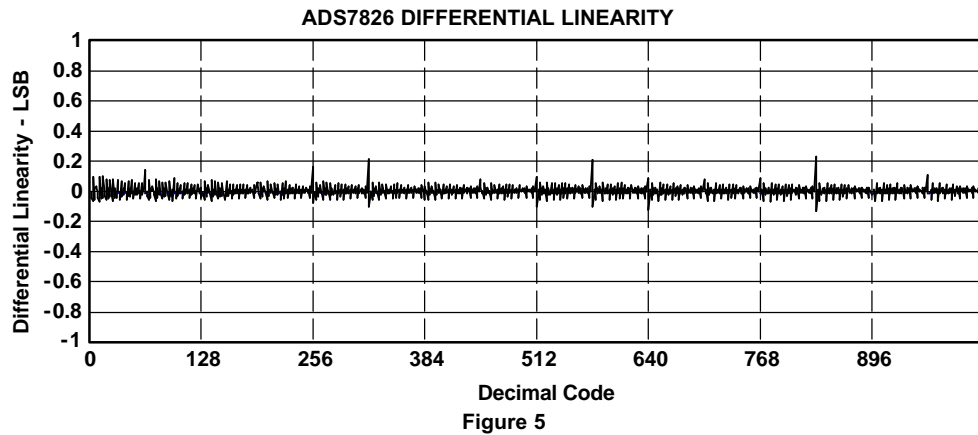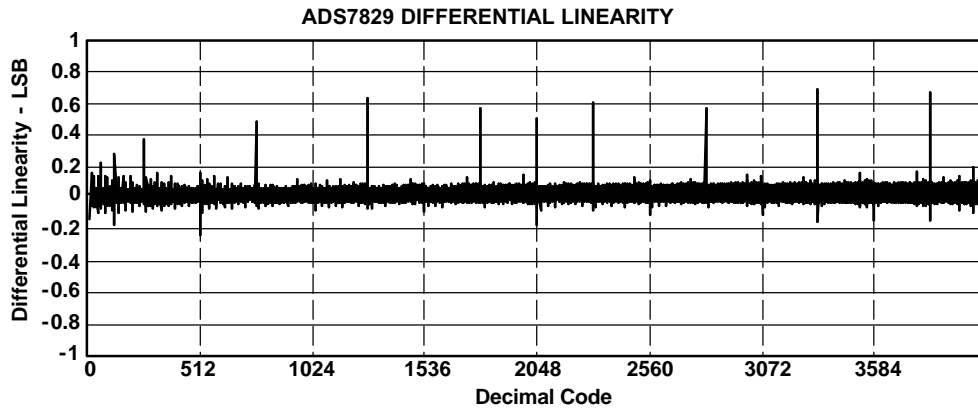

**TYPICAL CHARACTERISTICS (continued)**

At  $T_A = 25^\circ\text{C}$ ,  $V_{CC} = 2.7\text{ V}$ ,  $V_{ref} = 25\text{ V}$ , (unless otherwise specified)

**CHANGE IN MINIMUM INTEGRAL LINEARITY  
 vs  
 FREE-AIR TEMPERATURE**

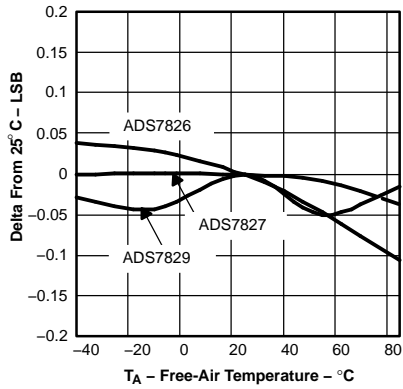


Figure 7.

**CHANGE IN MAXIMUM INTEGRAL LINEARITY  
 vs  
 FREE-AIR TEMPERATURE**

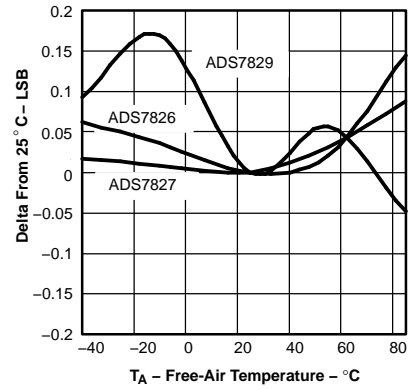


Figure 8.

**CHANGE IN MINIMUM DIFFERENTIAL LINEARITY  
 vs  
 FREE-AIR TEMPERATURE**

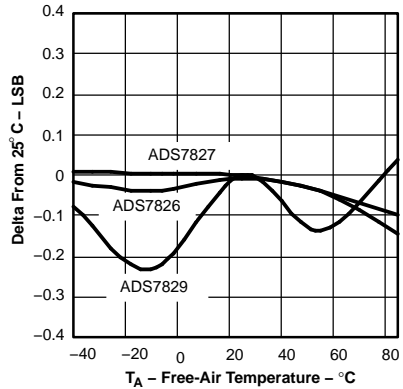


Figure 9.

**CHANGE IN MAXIMUM DIFFERENTIAL LINEARITY  
 vs  
 FREE-AIR TEMPERATURE**

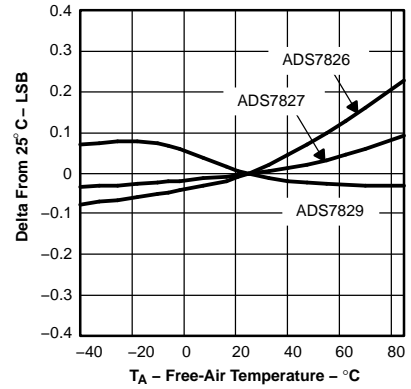


Figure 10.

**CHANGE IN OFFSET ERROR  
 vs  
 FREE-AIR TEMPERATURE**

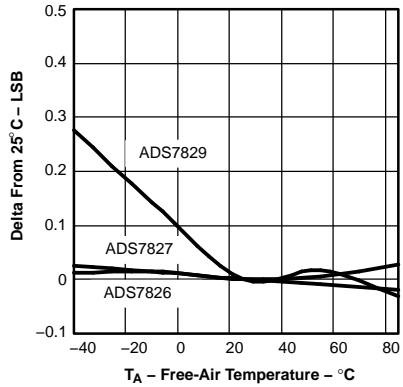


Figure 11.

**CHANGE IN GAIN ERROR  
 vs  
 FREE-AIR TEMPERATURE**

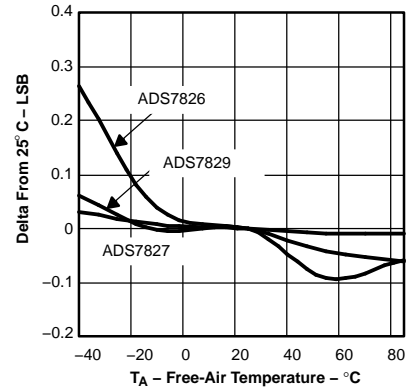


Figure 12.

### TYPICAL CHARACTERISTICS (continued)

At  $T_A = 25^\circ\text{C}$ ,  $V_{CC} = 2.7\text{ V}$ ,  $V_{ref} = 25\text{ V}$ , (unless otherwise specified)

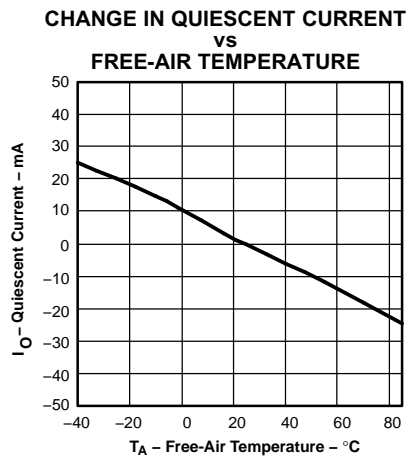


Figure 13.

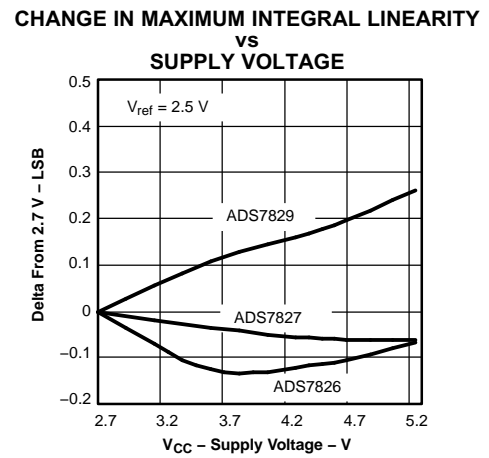


Figure 14.

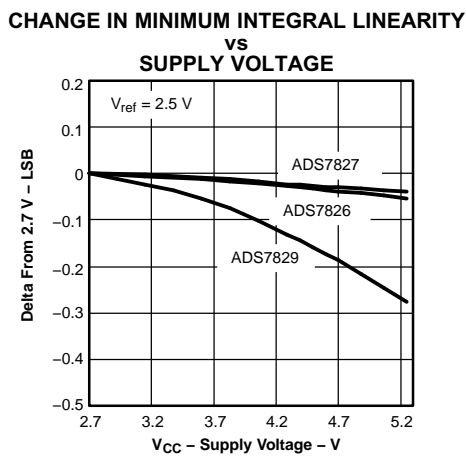


Figure 15.

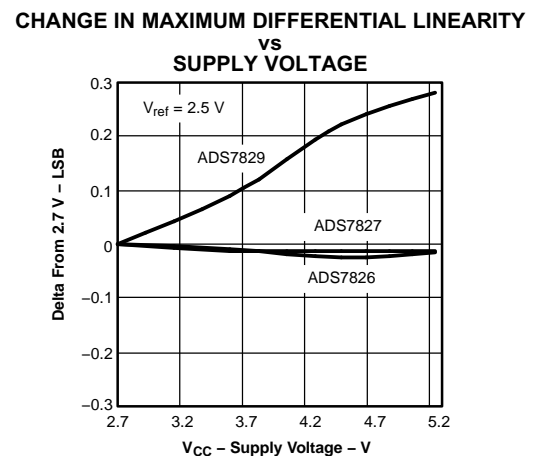


Figure 16.

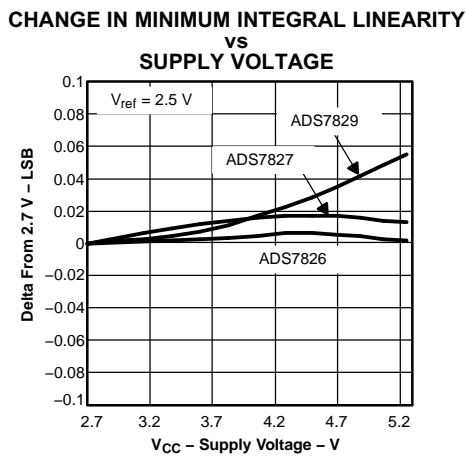


Figure 17.

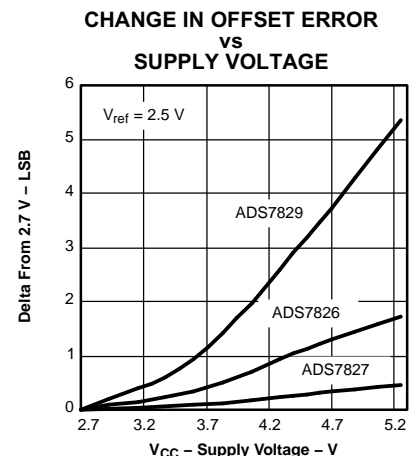


Figure 18.

**TYPICAL CHARACTERISTICS (continued)**

At  $T_A = 25^\circ\text{C}$ ,  $V_{CC} = 2.7\text{ V}$ ,  $V_{ref} = 2.5\text{ V}$ , (unless otherwise specified)

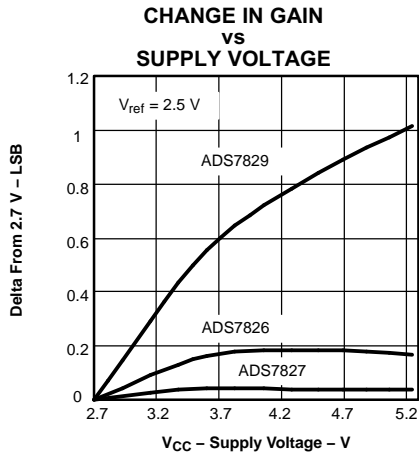


Figure 19.

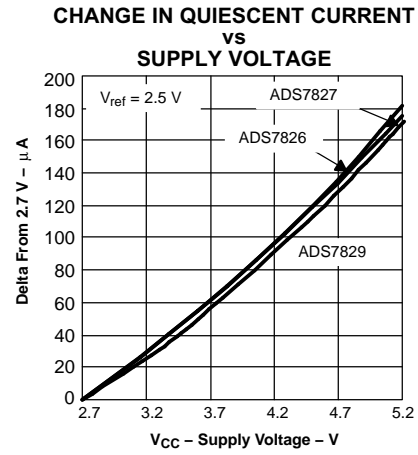


Figure 20.

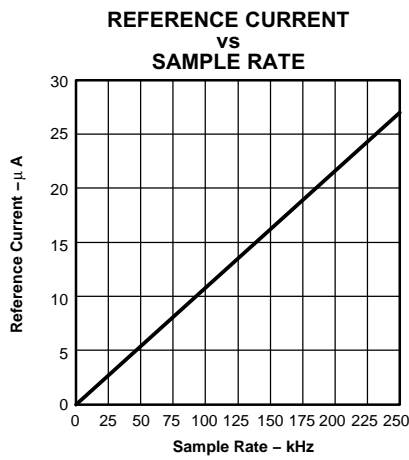


Figure 21.

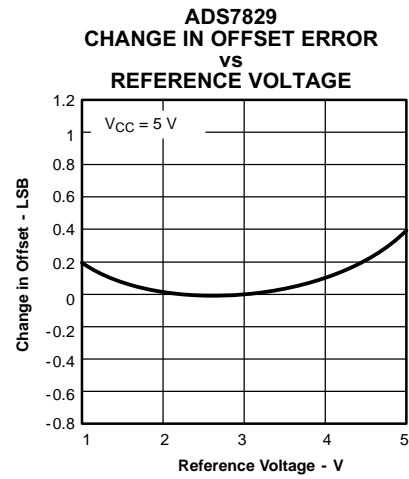


Figure 22.

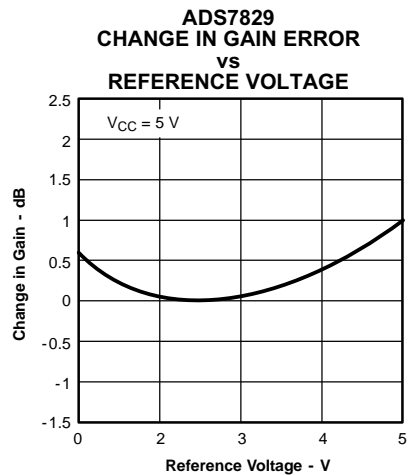


Figure 23.


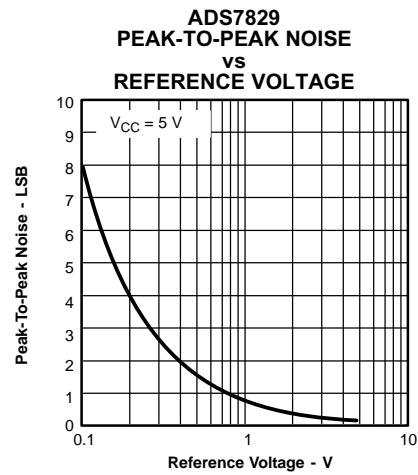



Figure 24.

**TYPICAL CHARACTERISTICS (continued)**


At  $T_A = 25^\circ\text{C}$ ,  $V_{CC} = 2.7\text{ V}$ ,  $V_{ref} = 25\text{ V}$ , (unless otherwise specified)

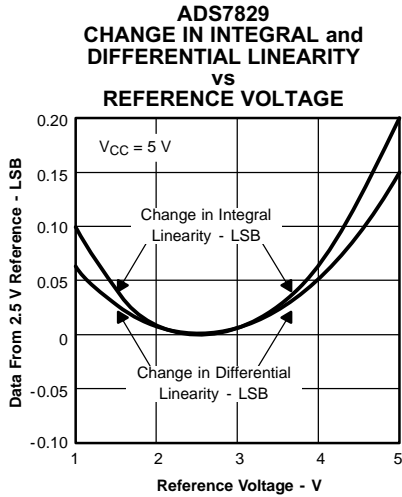


**Figure 25.**

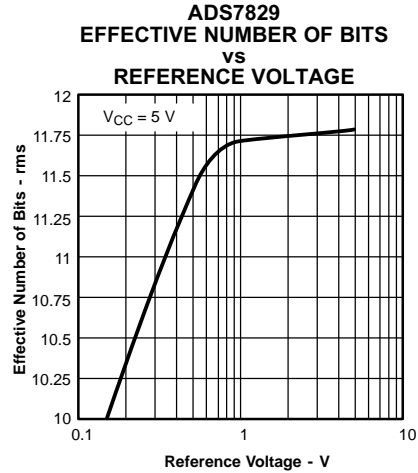


**Figure 26.**

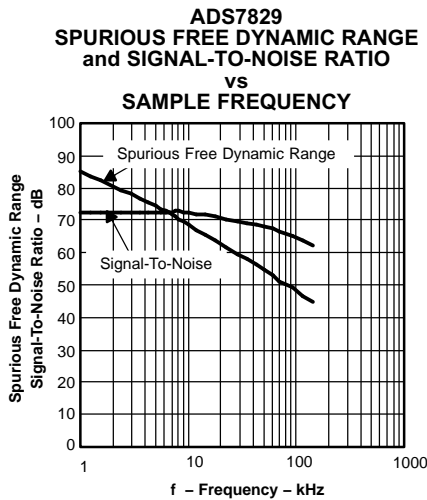


**Figure 27.**

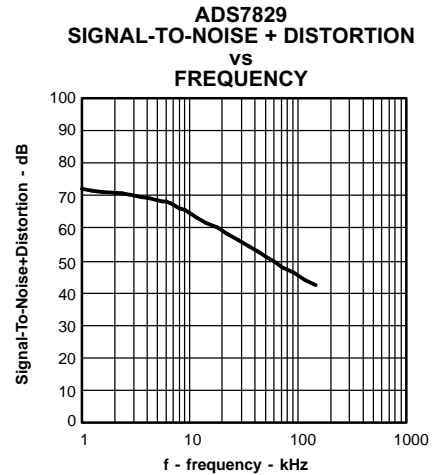

**Figure 28.**

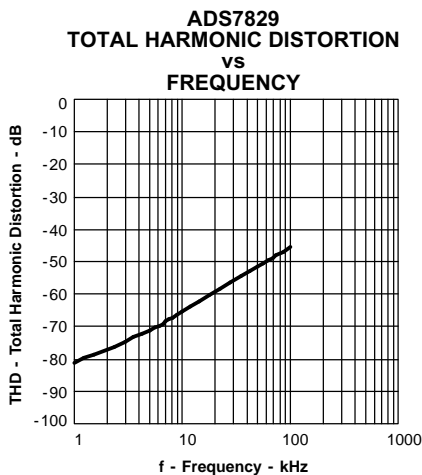

**Figure 29.**

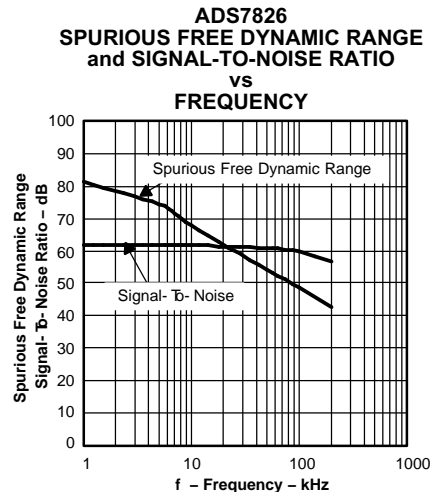

**Figure 30.**

**TYPICAL CHARACTERISTICS (continued)**

At  $T_A = 25^\circ\text{C}$ ,  $V_{CC} = 2.7\text{ V}$ ,  $V_{ref} = 25\text{ V}$ , (unless otherwise specified)

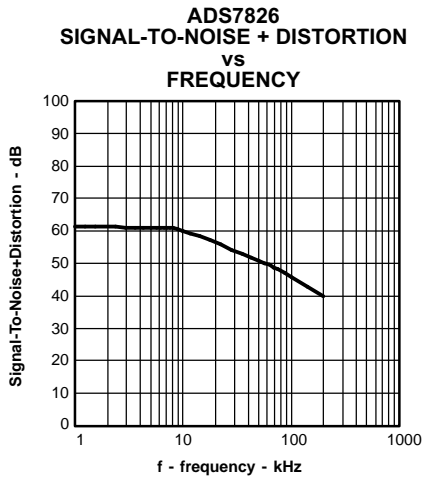


Figure 31.

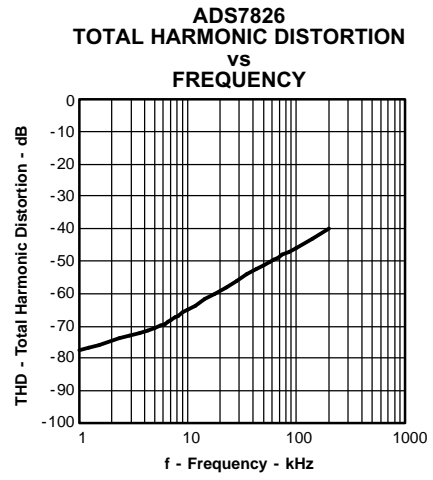


Figure 32.

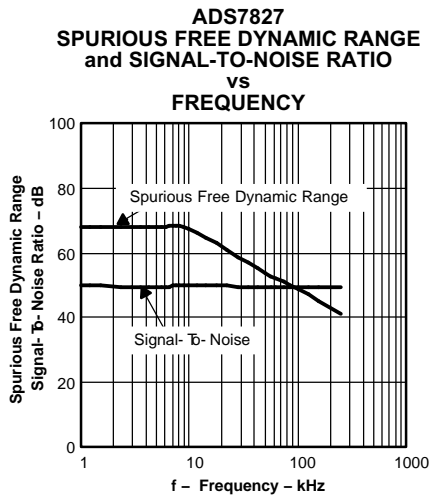


Figure 33.

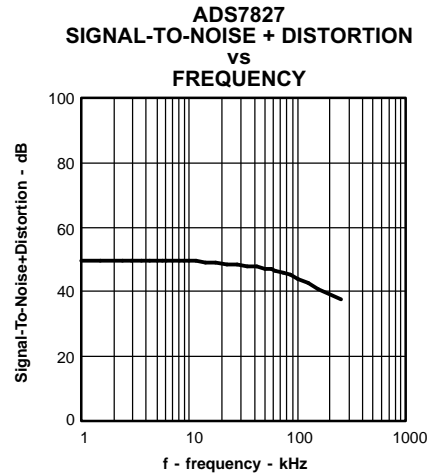


Figure 34.

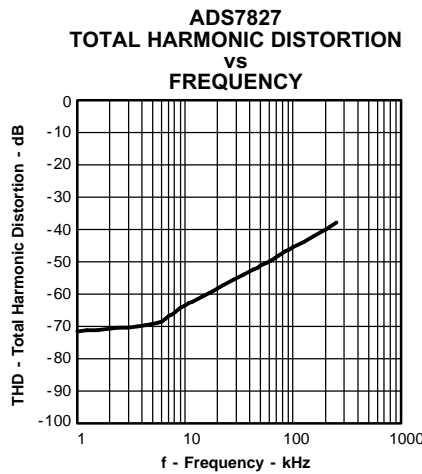


Figure 35.

## THEORY OF OPERATION

The ADS7826/27/29 is a family of micropower classic successive approximation register (SAR) analog-to-digital (A/D) converters. The architecture is based on capacitive redistribution which inherently includes a sample/hold function. The converter is fabricated on a 0.6  $\mu\text{m}$  CMOS process. The architecture and process allow the ADS7826/27/29 family to acquire and convert an analog signal at up to 200K/250K/125K conversions per second respectively while consuming very little power.

The ADS7826/27/29 family requires an external reference, an external clock, and a single power source ( $V_{\text{CC}}$ ). The external reference can be any voltage between 50 mV and  $V_{\text{CC}}$ . The value of the reference voltage directly sets the range of the analog input. The reference input current depends on the conversion rate of the ADS7826/27/29 family.

The minimum external clock input to DCLOCK can be as low as 10 kHz. The maximum external clock frequency is 2 MHz for ADS7829, 2.8 MHz for ADS7826 and 3 MHz for ADS7827 respectively. The duty cycle of the clock is essentially unimportant as long as the minimum high and low times are at least 400 ns ( $V_{\text{CC}} = 2.7\text{ V}$  or greater). The minimum DCLOCK frequency is set by the leakage on the capacitors internal to the ADS7826/27/29 family.

The analog input is provided to two input pins: +In and -In. When a conversion is initiated, the differential input on these pins is sampled on the internal capacitor array. While a conversion is in progress, both inputs are disconnected from any internal function.

The digital result of the conversion is clocked out by the DCLOCK input and is provided serially, most significant bit first, on the  $D_{\text{OUT}}$  pin. The digital data that is provided on the  $D_{\text{OUT}}$  pin is for the conversion currently in progress—there is no pipeline delay.

### ANALOG INPUT

The +In and -In input pins allow for a differential input signal. Unlike some converters of this type, the -In input is not re-sampled later in the conversion cycle. When the converter goes into the hold mode, the voltage difference between +In and -In is captured on the internal capacitor array.

The range of the -In input is limited to -0.2 V to 1 V. Because of this, the differential input can be used to reject only small signals that are common to both inputs. Thus, the -In input is best used to sense a remote signal ground that may move slightly with respect to the local ground potential.

The input current on the analog inputs depends on a number of factors: sample rate, input voltage, source impedance, and power down mode. Essentially, the current into the ADS7826/27/29 family charges the internal capacitor array during the sample period. After this capacitance has been fully charged, there is no further input current. The source of the analog input voltage must be able to charge the input capacitance (25 pF) to a 10/8/12-bit settling level within 1.5 DCLOCK cycles. When the converter goes into the hold mode or while it is in the power down mode, the input impedance is greater than 1 G $\Omega$ .

Care must be taken regarding the absolute analog input voltage. To maintain the linearity of the converter, the -In input should not drop below GND - 200 mV or exceed GND + 1 V. The +In input should always remain within the range of GND - 200 mV to  $V_{\text{CC}} + 200\text{ mV}$ . Outside of these ranges, the converter's linearity may not meet specifications.

### REFERENCE INPUT

The external reference sets the analog input range. The ADS7826/27/29 family operates with a reference in the range of 50 mV to  $V_{\text{CC}}$ . There are several important implications of this.

As the reference voltage is reduced, the analog voltage weight of each digital output code is reduced. This is often referred to as the LSB (least significant bit) size and is equal to the reference voltage divided by  $2^N$  (where N is 12 for ADS7829, 10 for ADS7826, and 8 for ADS7827). This means that any offset or gain error inherent in the A/D converter appears to increase, in terms of LSB size, as the reference voltage is reduced.

The noise inherent in the converter also appears to increase with lower LSB size. With a 2.5 V reference, the internal noise of the converter typically contributes only 0.32 LSB peak-to-peak of potential error to the output code. When the external reference is 50 mV, the potential error contribution from the internal noise is 50 times larger —16 LSBs. The errors due to the internal noise are gaussian in nature and can be reduced by averaging consecutive conversion results.

For more information regarding noise, consult the typical performance curves *Effective Number of Bits vs Reference Voltage* and *Peak-to-Peak Noise vs Reference Voltage* (only curves for ADS7829 are shown). Note that the effective number of bits (ENOB) figure is calculated based on the converter's signal-to-(noise + distortion) ratio with a 1 kHz, 0 dB input signal. SINAD is related to ENOB as follows:

$$SINAD = 6.02 \times ENOB + 1.76$$

With lower reference voltages, extra care should be taken to provide a clean layout including adequate bypassing, a clean power supply, a low-noise reference, and a low-noise input signal. Because the LSB size is lower, the converter is more sensitive to external sources of error such as nearby digital signals and electromagnetic interference.

## DIGITAL INTERFACE

### Signal Levels


The digital inputs of the ADS7826/27/29 family can accommodate logic levels up to 6 V regardless of the value of  $V_{CC}$ . Thus, the ADS7826/27/29 family can be powered at 3 V and still accept inputs from logic powered at 5 V.

The CMOS digital output ( $D_{OUT}$ ) swings 0 V to  $V_{CC}$ . If  $V_{CC}$  is 3 V and this output is connected to a 5-V CMOS logic input, then that IC may require more supply current than normal and may have a slightly longer propagation delay.

## Serial Interface


The ADS7826/27/29 family communicates with microprocessors and other digital systems via a synchronous 3-wire serial interface. Timings for ADS7829 are shown in Figure 36 and Table 1. The DCLOCK signal synchronizes the data transfer with each bit being transmitted on the falling edge of DCLOCK. Most receiving systems capture the bitstream on the rising edge of DCLOCK. However, if the minimum hold time for  $D_{OUT}$  is acceptable, the system can use the falling edge of DCLOCK to capture each bit.

The timings for ADS7826 and ADS7827 serial interface are shown in Figure 37 and Table 1. The DCLOCK signal synchronizes the data transfer with each bit being transmitted on the falling edge of DCLOCK. Most receiving systems capture the bitstream on the rising edge of DCLOCK. However, if the minimum hold time for  $D_{OUT}$  is acceptable, the system can use the falling edge of DCLOCK to capture each bit.

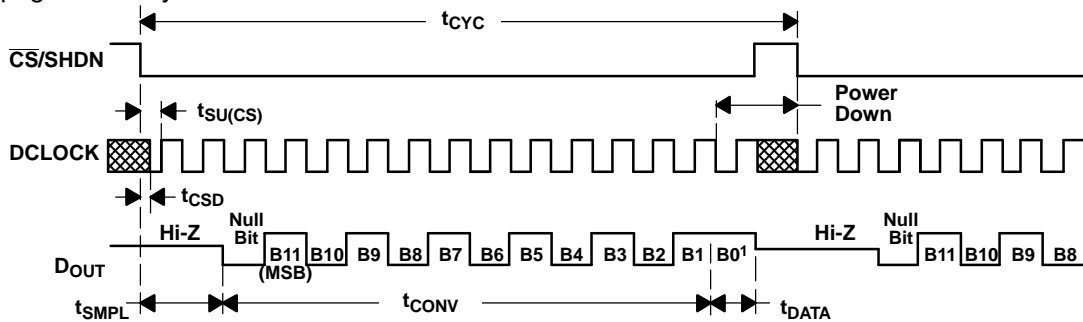

After completing the data transfer, if further clocks are applied with  $\overline{CS}$  LOW, the A/D outputs LSB-First data then followed with zeroes indefinitely.

**Figure 36. ADS7829 Timing**

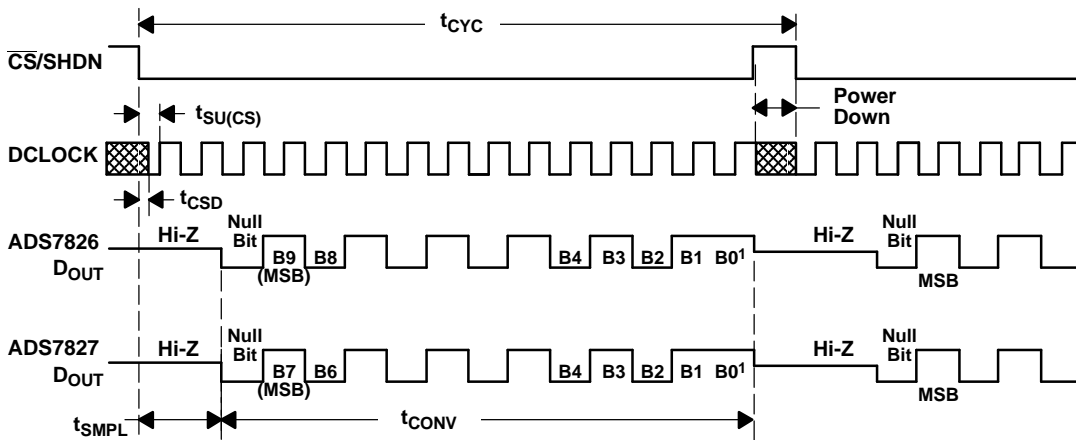

**Figure 37. ADS7826 and ADS7827 Timing**

**Table 1. Timing Specifications ( $V_{CC} = 2.7\text{ V}$  and Above  $-40^{\circ}\text{C}$  to  $85^{\circ}\text{C}$ )**

| SYMBOL              | DESCRIPTION   | MIN                   | TYP | MAX | UNIT          |
|---------------------|---|-----------------------|-----|-----|---------------|
| $t_{\text{SAMPLE}}$ | Analog input sample time                                  | 1.5                   |     | 2.0 | DCLOCK Cycles |
| $t_{\text{CONV}}$   | Conversion time   | ADS7829I or ADS7829IB |     | 12  | DCLOCK Cycles |
|                     |   | ADS7826I              |     | 11  |               |
|                     |   | ADS7827I              |     | 9   |               |
| $t_{\text{CYC}}$    | Cycle time  | ADS7829I or ADS7829IB |     | 16  | DCLOCK Cycles |
|                     |   | ADS7826               |     | 14  |               |
|                     |   | ADS7827               |     | 12  |               |
| $t_{\text{CSD}}$    | $\overline{\text{CS}}$ falling to DCLOCK LOW              |                       |     | 0   | ns            |
| $t_{\text{SU(CS)}}$ | $\overline{\text{CS}}$ falling to DCLOCK rising           | 30                    |     |     | ns            |
| $t_{\text{h(DO)}}$  | DCLOCK falling to current $D_{\text{OUT}}$ not valid      | 15                    |     |     | ns            |
| $t_{\text{d(DO)}}$  | DCLOCK falling to next $D_{\text{OUT}}$ valid             |                       | 130 | 200 | ns            |
| $t_{\text{dis}}$    | $\overline{\text{CS}}$ rising to $D_{\text{OUT}}$ 3-state |                       | 40  | 80  | ns            |
| $t_{\text{en}}$     | DCLOCK falling to $D_{\text{OUT}}$ enabled                |                       | 75  | 175 | ns            |
| $t_{\text{f}}$      | $D_{\text{OUT}}$ fall time                                |                       | 90  | 200 | ns            |
| $t_{\text{r}}$      | $D_{\text{OUT}}$ rise time                                |                       | 110 | 220 | ns            |


A falling  $\overline{\text{CS}}$  signal initiates the conversion and data transfer. The first 1.5 to 2.0 clock periods of the conversion cycle are used to sample the input signal. After the second falling DCLOCK edge,  $D_{\text{OUT}}$  is enabled and outputs a LOW value for one clock period. For the next N (N is 12 for ADS7829, 10 for ADS7826, and 8 for ADS7827) DCLOCK periods,  $D_{\text{OUT}}$  outputs the conversion result, most significant bit first. After the least significant bit has been sent,  $D_{\text{OUT}}$  goes to 3-state after the rising edge of  $\overline{\text{CS}}$ . A new conversion is initiated only when  $\overline{\text{CS}}$  has been taken high and returned low again.

## DATA FORMAT

The output data from the ADS7826/27/29 family is in straight binary format. ADS7829 out is shown in Table 2, as an example. This table represents the ideal output code for the given input voltage and does not include the effects of offset, gain error, or noise. For ADS7826 the last two LSB's are don't cares, while for ADS7827 the last four LSB's are don't cares.

**Table 2. Ideal Input Voltages and Output Codes (ADS7829 Shown as an Example)**

| DESCRIPTION                 | ANALOG VALUE                      | DIGITAL OUTPUT  |          |
|-----------------------------|-----------------------------------|-----------------|----------|
|                             |                                   | STRAIGHT BINARY |          |
| FULL SCALE RANGE            | $V_{\text{ref}}$                  | BINARY CODE     | HEX CODE |
| LEAST SIGNIFICANT BIT (LSB) | $V_{\text{ref}}/4096$             |                 |          |
| Full scale                  | $V_{\text{ref}} - 1\text{ LSB}$   | 1111 1111 1111  | FFF      |
| Midscale                    | $V_{\text{ref}}/2$                | 1000 0000 0000  | 800      |
| Midscale - 1 LSB            | $V_{\text{ref}}/2 - 1\text{ LSB}$ | 0111 1111 1111  | 7FF      |
| Zero                        | 0 V                               | 0000 0000 0000  | 000      |

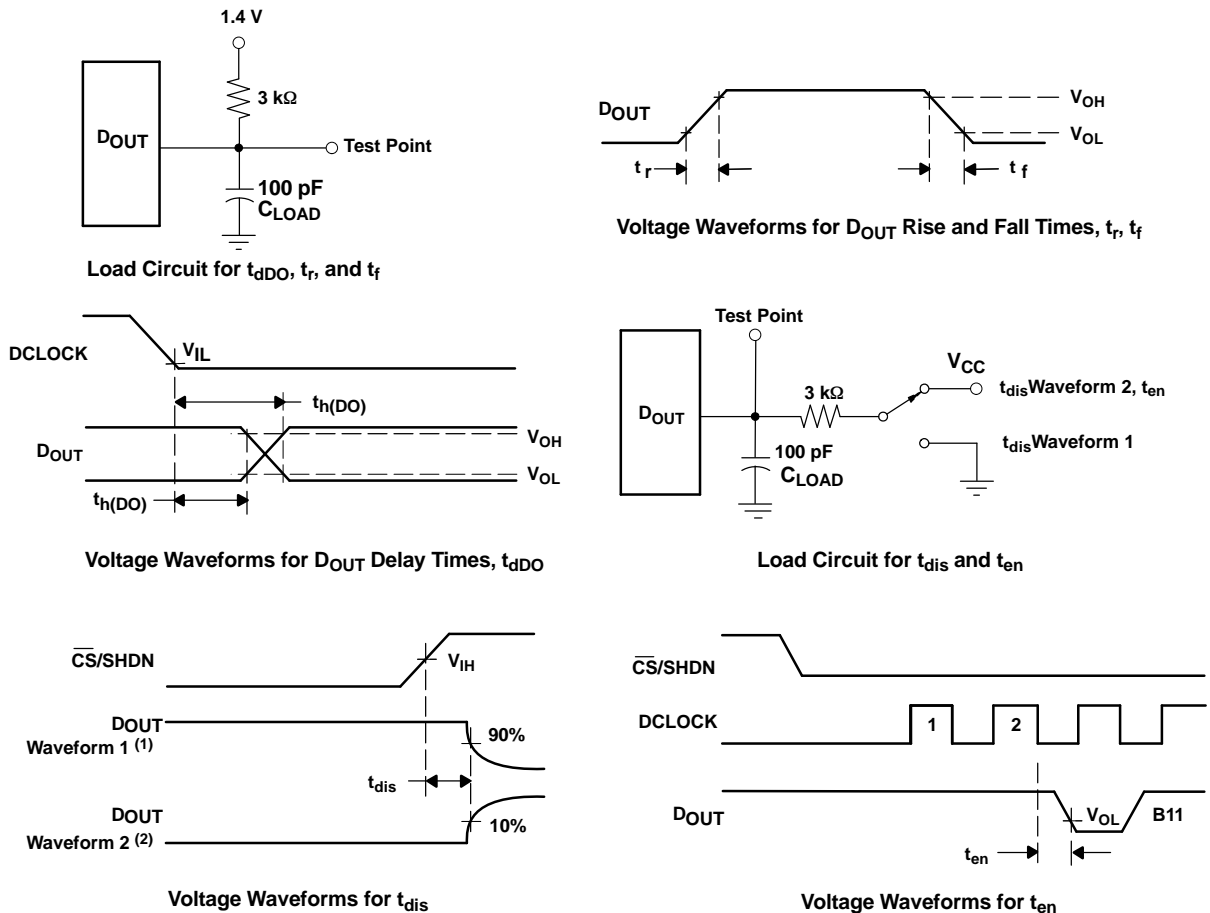

- (1) Waveform 1 is for an output with internal conditions such that the output is HIGH unless disabled by the output control.
- (2) Waveform 2 is for an output with internal conditions such that the output is LOW unless disabled by the output control.

Figure 38. Timing Diagrams and Test Circuits for the Parameters in Table 1.

## POWER DISSIPATION

The architecture of the converter, the semiconductor fabrication process, and a careful design allows the ADS7826/27/29 family to convert at the full sample rate while requiring very little power. But, for the absolute lowest power dissipation, there are several things to keep in mind.

The power dissipation of the ADS7826/27/29 family scales directly with conversion rate. Therefore, the first step to achieving the lowest power dissipation is to find the lowest conversion rate that satisfies the requirements of the system.

In addition, the ADS7826/27/29 family is in power down mode under two conditions: when the conversion is complete and whenever  $\overline{CS}$  is HIGH. Ideally, each conversion occurs as quickly as possible, preferably, at DCLOCK rate.

This way, the converter spends the longest possible time in the power down mode. This is very important as the converter not only uses power on each DCLOCK transition (as is typical for digital CMOS components) but also uses some current for the analog circuitry, such as the comparator. The analog section dissipates power continuously, until the power-down mode is entered.

The current consumption of the ADS7826/27/29 family versus sample rate. For this graph, the converter is clocked at maximum DCLOCK rate regardless of the sample rate  $\overline{CS}$  is HIGH for the remaining sample period. Figure 4 also shows current consumption versus sample rate. However, in this case, the minimum DCLOCK cycle time is used  $\overline{CS}$  is HIGH for one DCLOCK cycle.

There is an important distinction between the power down mode that is entered after a conversion is complete and the full power-down mode which is enabled when  $\overline{CS}$  is HIGH. While both shutdown the analog section, the digital section is completely shutdown only when  $\overline{CS}$  is HIGH. Thus, if  $\overline{CS}$  is left LOW at the end of a conversion and the converter is continually clocked, the power consumption is not as low as when  $\overline{CS}$  is HIGH.

Power dissipation can also be reduced by lowering the power supply voltage and the reference voltage. The ADS7826/27/29 family operates over a  $V_{CC}$  range of 2.0 V to 5.25 V. However, at voltages below 2.7 V, the converter does not run at the maximum sample rate. See the typical performance curves for more information regarding power supply voltage and maximum sample rate.

## LAYOUT

For optimum performance, care should be taken with the physical layout of the ADS7826/27/29 family circuitry. This is particularly true if the reference voltage is low and/or the conversion rate is high. At a 125-kHz to 250-kHz conversion rate, the ADS7826/27/29 family makes a bit decision every 800 ns to 400 ns. That is, for each subsequent bit decision, the digital output must be updated with the results of the last bit decision, the capacitor array appropriately switched and charged, and the input to the comparator settled, for example the ADS7829, to a 12-bit level all within one clock cycle.

The basic SAR architecture is sensitive to spikes on the power supply, reference, and ground connections that occur just prior to latching the comparator output. Thus, during any single conversion for an n-bit SAR converter, there are n *windows* in which large external transient voltages can easily affect the conversion result. Such spikes might originate from switching power supplies, digital logic, and high power devices, to name a few. This particular source of error can be very difficult to track down if the glitch is almost synchronous to the converter's DCLOCK signal—as the phase difference between the two changes with time and temperature, causing sporadic misoperation.

With this in mind, power to the ADS7826/27/29 family should be clean and well bypassed. A 0.1- $\mu$ F ceramic bypass capacitor should be placed as close to the ADS7826/27/29 family package as possible. In addition, a 1- $\mu$  to 10- $\mu$ F capacitor and a 5- $\Omega$  or 10- $\Omega$  series resistor may be used to lowpass filter a noisy supply.

The reference should be similarly bypassed with a 0.1- $\mu$ F capacitor. Again, a series resistor and large capacitor can be used to lowpass filter the reference voltage. If the reference voltage originates from an op-amp, be careful that the op-amp can drive the bypass capacitor without oscillation (the series resistor can help in this case). Keep in mind that while the ADS7826/27/29 family draws very little current from the reference on average, there are still instantaneous current demands placed on the external reference circuitry.

Also, keep in mind that the ADS7826/27/29 family offers no inherent rejection of noise or voltage variation in regards to the reference input. This is of particular concern when the reference input is tied to the power supply. Any noise and ripple from the supply appears directly in the digital results. While high frequency noise can be filtered out as described in the previous paragraph, voltage variation due to the line frequency (50 Hz or 60 Hz), can be difficult to remove.

The GND pin on the ADS7826/27/29 family must be placed on a clean ground point. In many cases, this is the *analog* ground. Avoid connecting the GND pin too close to the grounding point for a microprocessor, microcontroller, or digital signal processor. If needed, run a ground trace directly from the converter to the power supply connection point. The ideal layout includes an analog ground plane for the converter and associated analog circuitry.

## APPLICATION CIRCUITS

Figure 39 and Figure 40 show some typical application circuits the ADS7826/27/29 family. Figure 39 uses an ADS7826/27/29 and a multiplexer to provide for a flexible data acquisition circuit. A resistor string provides for various voltages at the multiplexer input. The selected voltage is buffered and driven into  $V_{ref}$ . As shown in Figure 39, the input range of the ADS7826/27/29 family programmable to 100 mV, 200 mV, 300 mV, or 400 mV. The 100-mV range would be useful for sensors such as thermocouple shown.

Figure 39 shows a basic data acquisition system. The ADS7826/27/29 family input range is 0 V to  $V_{CC}$ , as the reference input is connected directly to the power supply. The 5- $\Omega$  resistor and 1- $\mu$ F to 10- $\mu$ F capacitor filters the microcontroller *noise* on the supply, as well as any high-frequency noise from the supply itself. The exact values should be picked such that the filter provides adequate rejection of the noise.



**PACKAGING INFORMATION**

| Orderable Device | Status<br>(1) | Package Type | Package<br>Drawing | Pins | Package<br>Qty | Eco Plan<br>(2)            | Lead/Ball Finish<br>(6) | MSL Peak Temp<br>(3) | Op Temp (°C) | Device Marking<br>(4/5) | Samples                 |
|------------------|---------------|--------------|--------------------|------|----------------|----------------------------|-------------------------|----------------------|--------------|-------------------------|-------------------------|
| ADS7826IDRBR     | ACTIVE        | SON          | DRB                | 8    | 2500           | Green (RoHS<br>& no Sb/Br) | CU NIPDAU               | Level-2-260C-1 YEAR  | -40 to 85    | F26                     | <a href="#">Samples</a> |
| ADS7826IDRBRG4   | ACTIVE        | SON          | DRB                | 8    | 2500           | Green (RoHS<br>& no Sb/Br) | CU NIPDAU               | Level-2-260C-1 YEAR  | -40 to 85    | F26                     | <a href="#">Samples</a> |
| ADS7826IDRBT     | ACTIVE        | SON          | DRB                | 8    | 250            | Green (RoHS<br>& no Sb/Br) | CU NIPDAU               | Level-2-260C-1 YEAR  | -40 to 85    | F26                     | <a href="#">Samples</a> |
| ADS7826IDRBTG4   | ACTIVE        | SON          | DRB                | 8    | 250            | Green (RoHS<br>& no Sb/Br) | CU NIPDAU               | Level-2-260C-1 YEAR  | -40 to 85    | F26                     | <a href="#">Samples</a> |
| ADS7827IDRBR     | ACTIVE        | SON          | DRB                | 8    | 2500           | Green (RoHS<br>& no Sb/Br) | CU NIPDAU               | Level-2-260C-1 YEAR  | -40 to 85    | F27                     | <a href="#">Samples</a> |
| ADS7827IDRBRG4   | ACTIVE        | SON          | DRB                | 8    | 2500           | Green (RoHS<br>& no Sb/Br) | CU NIPDAU               | Level-2-260C-1 YEAR  | -40 to 85    | F27                     | <a href="#">Samples</a> |
| ADS7827IDRBT     | ACTIVE        | SON          | DRB                | 8    | 250            | Green (RoHS<br>& no Sb/Br) | CU NIPDAU               | Level-2-260C-1 YEAR  | -40 to 85    | F27                     | <a href="#">Samples</a> |
| ADS7827IDRBTG4   | ACTIVE        | SON          | DRB                | 8    | 250            | Green (RoHS<br>& no Sb/Br) | CU NIPDAU               | Level-2-260C-1 YEAR  | -40 to 85    | F27                     | <a href="#">Samples</a> |
| ADS7829IBDRBR    | ACTIVE        | SON          | DRB                | 8    | 2500           | Green (RoHS<br>& no Sb/Br) | CU NIPDAU               | Level-2-260C-1 YEAR  | -40 to 85    | F29                     | <a href="#">Samples</a> |
| ADS7829IBDRBT    | ACTIVE        | SON          | DRB                | 8    | 250            | Green (RoHS<br>& no Sb/Br) | CU NIPDAU               | Level-2-260C-1 YEAR  | -40 to 85    | F29                     | <a href="#">Samples</a> |
| ADS7829IBDRBTG4  | ACTIVE        | SON          | DRB                | 8    | 250            | Green (RoHS<br>& no Sb/Br) | CU NIPDAU               | Level-2-260C-1 YEAR  | -40 to 85    | F29                     | <a href="#">Samples</a> |
| ADS7829IDRBR     | ACTIVE        | SON          | DRB                | 8    | 2500           | Green (RoHS<br>& no Sb/Br) | CU NIPDAU               | Level-2-260C-1 YEAR  | -40 to 85    | F29                     | <a href="#">Samples</a> |
| ADS7829IDRBT     | ACTIVE        | SON          | DRB                | 8    | 250            | Green (RoHS<br>& no Sb/Br) | CU NIPDAU               | Level-2-260C-1 YEAR  | -40 to 85    | F29                     | <a href="#">Samples</a> |

(1) The marketing status values are defined as follows:

**ACTIVE:** Product device recommended for new designs.

**LIFEBUY:** TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

**PREVIEW:** Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

(2) **RoHS:** TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".

**RoHS Exempt:** TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.

**Green:** TI defines "Green" to mean the content of Chlorine (Cl) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of  $\leq 1000$ ppm threshold. Antimony trioxide based flame retardants must also meet the  $\leq 1000$ ppm threshold requirement.

(3) MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

(4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

(5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

(6) Lead/Ball Finish - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead/Ball Finish values may wrap to two lines if the finish value exceeds the maximum column width.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

## TAPE AND REEL INFORMATION



### QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE



\*All dimensions are nominal

| Device        | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|---------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| ADS7826IDRBR  | SON          | DRB             | 8    | 2500 | 330.0              | 12.4               | 3.3     | 3.3     | 1.1     | 8.0     | 12.0   | Q2            |
| ADS7826IDRBT  | SON          | DRB             | 8    | 250  | 180.0              | 12.4               | 3.3     | 3.3     | 1.1     | 8.0     | 12.0   | Q2            |
| ADS7827IDRBR  | SON          | DRB             | 8    | 2500 | 330.0              | 12.4               | 3.3     | 3.3     | 1.1     | 8.0     | 12.0   | Q2            |
| ADS7827IDRBT  | SON          | DRB             | 8    | 250  | 180.0              | 12.4               | 3.3     | 3.3     | 1.1     | 8.0     | 12.0   | Q2            |
| ADS7829IBDRBR | SON          | DRB             | 8    | 2500 | 330.0              | 12.4               | 3.3     | 3.3     | 1.1     | 8.0     | 12.0   | Q2            |
| ADS7829IBDRBT | SON          | DRB             | 8    | 250  | 180.0              | 12.4               | 3.3     | 3.3     | 1.1     | 8.0     | 12.0   | Q2            |
| ADS7829IDRBR  | SON          | DRB             | 8    | 2500 | 330.0              | 12.4               | 3.3     | 3.3     | 1.1     | 8.0     | 12.0   | Q2            |
| ADS7829IDRBT  | SON          | DRB             | 8    | 250  | 180.0              | 12.4               | 3.3     | 3.3     | 1.1     | 8.0     | 12.0   | Q2            |

**TAPE AND REEL BOX DIMENSIONS**


\*All dimensions are nominal

| Device        | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|---------------|--------------|-----------------|------|------|-------------|------------|-------------|
| ADS7826IDRBR  | SON          | DRB             | 8    | 2500 | 367.0       | 367.0      | 35.0        |
| ADS7826IDRBT  | SON          | DRB             | 8    | 250  | 210.0       | 185.0      | 35.0        |
| ADS7827IDRBR  | SON          | DRB             | 8    | 2500 | 367.0       | 367.0      | 35.0        |
| ADS7827IDRBT  | SON          | DRB             | 8    | 250  | 210.0       | 185.0      | 35.0        |
| ADS7829IBDRBR | SON          | DRB             | 8    | 2500 | 367.0       | 367.0      | 35.0        |
| ADS7829IBDRBT | SON          | DRB             | 8    | 250  | 210.0       | 185.0      | 35.0        |
| ADS7829IDRBR  | SON          | DRB             | 8    | 2500 | 367.0       | 367.0      | 35.0        |
| ADS7829IDRBT  | SON          | DRB             | 8    | 250  | 210.0       | 185.0      | 35.0        |

**DRB 8**

**GENERIC PACKAGE VIEW**

**VSON - 1 mm max height**

PLASTIC SMALL OUTLINE - NO LEAD



Images above are just a representation of the package family, actual package may vary.  
Refer to the product data sheet for package details.

4203482/L






# EXAMPLE STENCIL DESIGN

DRB0008A

VSON - 1 mm max height

PLASTIC SMALL OUTLINE - NO LEAD

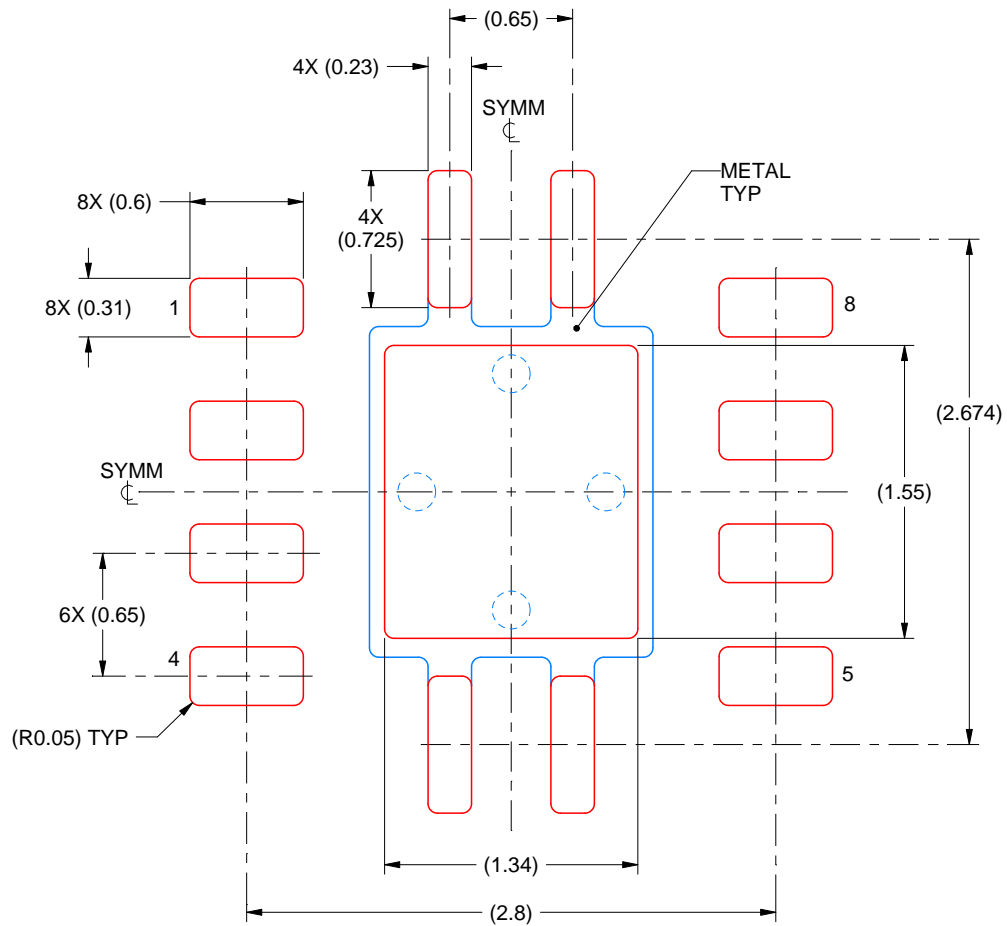

SOLDER PASTE EXAMPLE  
BASED ON 0.125 mm THICK STENCIL

EXPOSED PAD  
84% PRINTED SOLDER COVERAGE BY AREA  
SCALE:25X

4218875/A 01/2018

NOTES: (continued)

6. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.

## IMPORTANT NOTICE

Texas Instruments Incorporated (TI) reserves the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46, latest issue, and to discontinue any product or service per JESD48, latest issue. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete.

TI's published terms of sale for semiconductor products (<http://www.ti.com/sc/docs/stdterms.htm>) apply to the sale of packaged integrated circuit products that TI has qualified and released to market. Additional terms may apply to the use or sale of other types of TI products and services.

Reproduction of significant portions of TI information in TI data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such reproduced documentation. Information of third parties may be subject to additional restrictions. Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyers and others who are developing systems that incorporate TI products (collectively, "Designers") understand and agree that Designers remain responsible for using their independent analysis, evaluation and judgment in designing their applications and that Designers have full and exclusive responsibility to assure the safety of Designers' applications and compliance of their applications (and of all TI products used in or for Designers' applications) with all applicable regulations, laws and other applicable requirements. Designer represents that, with respect to their applications, Designer has all the necessary expertise to create and implement safeguards that (1) anticipate dangerous consequences of failures, (2) monitor failures and their consequences, and (3) lessen the likelihood of failures that might cause harm and take appropriate actions. Designer agrees that prior to using or distributing any applications that include TI products, Designer will thoroughly test such applications and the functionality of such TI products as used in such applications.

TI's provision of technical, application or other design advice, quality characterization, reliability data or other services or information, including, but not limited to, reference designs and materials relating to evaluation modules, (collectively, "TI Resources") are intended to assist designers who are developing applications that incorporate TI products; by downloading, accessing or using TI Resources in any way, Designer (individually or, if Designer is acting on behalf of a company, Designer's company) agrees to use any particular TI Resource solely for this purpose and subject to the terms of this Notice.

TI's provision of TI Resources does not expand or otherwise alter TI's applicable published warranties or warranty disclaimers for TI products, and no additional obligations or liabilities arise from TI providing such TI Resources. TI reserves the right to make corrections, enhancements, improvements and other changes to its TI Resources. TI has not conducted any testing other than that specifically described in the published documentation for a particular TI Resource.

Designer is authorized to use, copy and modify any individual TI Resource only in connection with the development of applications that include the TI product(s) identified in such TI Resource. NO OTHER LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE TO ANY OTHER TI INTELLECTUAL PROPERTY RIGHT, AND NO LICENSE TO ANY TECHNOLOGY OR INTELLECTUAL PROPERTY RIGHT OF TI OR ANY THIRD PARTY IS GRANTED HEREIN, including but not limited to any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information regarding or referencing third-party products or services does not constitute a license to use such products or services, or a warranty or endorsement thereof. Use of TI Resources may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

TI RESOURCES ARE PROVIDED "AS IS" AND WITH ALL FAULTS. TI DISCLAIMS ALL OTHER WARRANTIES OR REPRESENTATIONS, EXPRESS OR IMPLIED, REGARDING RESOURCES OR USE THEREOF, INCLUDING BUT NOT LIMITED TO ACCURACY OR COMPLETENESS, TITLE, ANY EPIDEMIC FAILURE WARRANTY AND ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, AND NON-INFRINGEMENT OF ANY THIRD PARTY INTELLECTUAL PROPERTY RIGHTS. TI SHALL NOT BE LIABLE FOR AND SHALL NOT DEFEND OR INDEMNIFY DESIGNER AGAINST ANY CLAIM, INCLUDING BUT NOT LIMITED TO ANY INFRINGEMENT CLAIM THAT RELATES TO OR IS BASED ON ANY COMBINATION OF PRODUCTS EVEN IF DESCRIBED IN TI RESOURCES OR OTHERWISE. IN NO EVENT SHALL TI BE LIABLE FOR ANY ACTUAL, DIRECT, SPECIAL, COLLATERAL, INDIRECT, PUNITIVE, INCIDENTAL, CONSEQUENTIAL OR EXEMPLARY DAMAGES IN CONNECTION WITH OR ARISING OUT OF TI RESOURCES OR USE THEREOF, AND REGARDLESS OF WHETHER TI HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

Unless TI has explicitly designated an individual product as meeting the requirements of a particular industry standard (e.g., ISO/TS 16949 and ISO 26262), TI is not responsible for any failure to meet such industry standard requirements.

Where TI specifically promotes products as facilitating functional safety or as compliant with industry functional safety standards, such products are intended to help enable customers to design and create their own applications that meet applicable functional safety standards and requirements. Using products in an application does not by itself establish any safety features in the application. Designers must ensure compliance with safety-related requirements and standards applicable to their applications. Designer may not use any TI products in life-critical medical equipment unless authorized officers of the parties have executed a special contract specifically governing such use. Life-critical medical equipment is medical equipment where failure of such equipment would cause serious bodily injury or death (e.g., life support, pacemakers, defibrillators, heart pumps, neurostimulators, and implantables). Such equipment includes, without limitation, all medical devices identified by the U.S. Food and Drug Administration as Class III devices and equivalent classifications outside the U.S.

TI may expressly designate certain products as completing a particular qualification (e.g., Q100, Military Grade, or Enhanced Product). Designers agree that it has the necessary expertise to select the product with the appropriate qualification designation for their applications and that proper product selection is at Designers' own risk. Designers are solely responsible for compliance with all legal and regulatory requirements in connection with such selection.

Designer will fully indemnify TI and its representatives against any damages, costs, losses, and/or liabilities arising out of Designer's non-compliance with the terms and provisions of this Notice.

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View ADS7826IDRBTG4 on WIN SOURCE](#)

 [Texas Instruments](#) Information

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management