



**THE DATASHEET OF
AUIRFN8403TR**



Features

- Advanced Process Technology
- Ultra Low On-Resistance
- 175°C Operating Temperature
- Fast Switching
- Repetitive Avalanche Allowed up to Tjmax
- Lead-Free, RoHS Compliant
- Automotive Qualified *

Description


Specifically designed for Automotive applications, this HEXFET® Power MOSFET utilizes the latest processing techniques to achieve extremely low on-resistance per silicon area. Additional features of this design are a 175°C junction operating temperature, fast switching speed and improved repetitive avalanche rating. These features combine to make this product an extremely efficient and reliable device for use in Automotive and wide variety of other applications.

Applications

- Electric Power Steering (EPS)
- Battery Switch
- Start/Stop Micro Hybrid
- Heavy Loads
- DC-DC Converter

HEXFET® POWER MOSFET

| | |
|--|-------------------------|
| V_{DSS} | 40V |
| R_{DS(on)} typ. | 2.5mΩ |
| max | 3.3mΩ |
| I_D (Silicon Limited) | 123A[Ⓔ] |
| I_D (Package Limited) | 95A |



| | | |
|------|-------|--------|
| G | D | S |
| Gate | Drain | Source |

| Base Part Number | Package Type | Standard Pack | | Orderable Part Number |
|------------------|----------------|---------------|----------|-----------------------|
| | | Form | Quantity | |
| AUIRFN8403 | PQFN 5mm x 6mm | Tape and Reel | 4000 | AUIRFN8403TR |

Absolute Maximum Ratings

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only; and functional operation of the device at these or any other condition beyond those indicated in the specifications is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability. The thermal resistance and power dissipation ratings are measured under board mounted and still air conditions. Ambient temperature (TA) is 25°C, unless otherwise specified.

| | Parameter | Max. | Units |
|---|---|---------------------------|-------|
| I _D @ T _{C(Bottom)} = 25°C | Continuous Drain Current, V _{GS} @ 10V (Silicon Limited) | 123 [Ⓔ] | A |
| I _D @ T _{C(Bottom)} = 100°C | Continuous Drain Current, V _{GS} @ 10V (Silicon Limited) | 87 [Ⓔ] | |
| I _D @ T _C = 25°C | Continuous Drain Current, V _{GS} @ 10V (Package Limited) | 95 [Ⓔ] | |
| I _{DM} | Pulsed Drain Current ① | 492 | |
| P _D @ T _A = 25°C | Power Dissipation | 4.3 | W |
| P _D @ T _{C(Bottom)} = 25°C | Power Dissipation | 94 | |
| | Linear Derating Factor | 0.029 | W/°C |
| V _{GS} | Gate-to-Source Voltage | ± 20 | V |
| E _{AS} | Single Pulse Avalanche Energy (Thermally Limited) ② | 100 | mJ |
| E _{AS (Tested)} | Single Pulse Avalanche Energy ② | 159 | |
| I _{AR} | Avalanche Current ① | See Fig. 14, 15, 22a, 22b | A |
| E _{AR} | Repetitive Avalanche Energy ① | | |
| T _J T _{STG} | Operating Junction and Storage Temperature Range | -55 to + 175 | °C |

HEXFET® is a registered trademark of International Rectifier.

*Qualification standards can be found at <http://www.irf.com/>

Thermal Resistance

| Symbol | Parameter | Typ. | Max. | Units |
|--------------------------|-----------------------|------|------|-------|
| $R_{\theta JC}$ (Bottom) | Junction-to-Case ④ | — | 1.6 | °C/W |
| $R_{\theta JC}$ (Top) | Junction-to-Case ④ | — | 31 | |
| $R_{\theta JA}$ | Junction-to-Ambient ⑤ | — | 35 | |
| $R_{\theta JA}$ (<10s) | Junction-to-Ambient ⑤ | — | 23 | |


Static Electrical Characteristics @ $T_J = 25^\circ\text{C}$ (unless otherwise specified)

| Symbol | Parameter | Min. | Typ. | Max. | Units | Conditions |
|---------------------------------|--------------------------------------|------|------|------|-------|--|
| $V_{(BR)DSS}$ | Drain-to-Source Breakdown Voltage | 40 | — | — | V | $V_{GS} = 0V, I_D = 250\mu\text{A}$ |
| $\Delta V_{(BR)DSS}/\Delta T_J$ | Breakdown Voltage Temp. Coefficient | — | 26 | — | mV/°C | Reference to $25^\circ\text{C}, I_D = 2.0\text{mA}$ |
| $R_{DS(on)}$ | Static Drain-to-Source On-Resistance | — | 2.5 | 3.3 | mΩ | $V_{GS} = 10V, I_D = 50A$ |
| $V_{GS(th)}$ | Gate Threshold Voltage | 2.6 | — | 3.9 | V | $V_{DS} = V_{GS}, I_D = 100\mu\text{A}$ |
| I_{DSS} | Drain-to-Source Leakage Current | — | — | 1.0 | μA | $V_{DS} = 40V, V_{GS} = 0V$ |
| | | — | — | 150 | | $V_{DS} = 40V, V_{GS} = 0V, T_J = 125^\circ\text{C}$ |
| I_{GSS} | Gate-to-Source Forward Leakage | — | — | 100 | Ω | $V_{GS} = 20V$ |
| | Gate-to-Source Reverse Leakage | — | — | -100 | | $V_{GS} = -20V$ |
| R_G | Internal Gate Resistance | — | 1.5 | — | | |

Dynamic Electrical Characteristics @ $T_J = 25^\circ\text{C}$ (unless otherwise specified)

| Symbol | Parameter | Min. | Typ. | Max. | Units | Conditions |
|---------------------|---|------|------|------|-------|--|
| gfs | Forward Transconductance | 159 | — | — | S | $V_{DS} = 10V, I_D = 50A$ |
| Q_g | Total Gate Charge | — | 65 | 98 | nC | $I_D = 50A$ $V_{DS} = 20V$ $V_{GS} = 10V$ |
| Q_{gs} | Gate-to-Source Charge | — | 16 | — | | |
| Q_{gd} | Gate-to-Drain ("Miller") Charge | — | 23 | — | | |
| Q_{sync} | Total Gate Charge Sync. ($Q_g - Q_{gd}$) | — | 42 | — | | |
| $t_{d(on)}$ | Turn-On Delay Time | — | 11 | — | ns | $V_{DD} = 20V$ $I_D = 30A$ $R_G = 2.7\Omega$ $V_{GS} = 10V$ ③ |
| t_r | Rise Time | — | 37 | — | | |
| $t_{d(off)}$ | Turn-Off Delay Time | — | 33 | — | | |
| t_f | Fall Time | — | 26 | — | | |
| C_{iss} | Input Capacitance | — | 3174 | — | pF | $V_{GS} = 0V$ $V_{DS} = 25V$ $f = 1.0\text{MHz}$ |
| C_{oss} | Output Capacitance | — | 479 | — | | |
| C_{rss} | Reverse Transfer Capacitance | — | 332 | — | | |
| C_{oss} eff. (ER) | Effective Output Capacitance (Energy Related) | — | 637 | — | | |
| C_{oss} eff. (TR) | Effective Output Capacitance (Time Related) | — | 656 | — | | |

Diode Characteristics

| Symbol | Parameter | Min. | Typ. | Max. | Units | Conditions |
|-----------|--|------|------|------|-------|--|
| I_S | Continuous Source Current (Body Diode) | — | — | 123⑥ | A | MOSFET symbol showing the integral reverse p-n junction diode.  |
| I_{SM} | Pulsed Source Current (Body Diode) ① | — | — | 492 | A | |
| V_{SD} | Diode Forward Voltage | — | 0.9 | 1.3 | V | $T_J = 25^\circ\text{C}, I_S = 50A, V_{GS} = 0V$ ③ |
| dv/dt | Peak Diode Recovery | — | 2.4 | — | V/ns | $T_J = 175^\circ\text{C}, I_S = 50A, V_{DS} = 40V$ |
| t_{rr} | Reverse Recovery Time | — | 16 | — | ns | $T_J = 25^\circ\text{C}$ $T_J = 125^\circ\text{C}$ $V_R = 34V,$ $I_F = 50A$ |
| | | — | 18 | — | | |
| Q_{rr} | Reverse Recovery Charge | — | 5.0 | — | nC | $T_J = 25^\circ\text{C}$ $T_J = 125^\circ\text{C}$ $di/dt = 100A/\mu\text{s}$ ③ |
| | | — | 6.9 | — | | |
| I_{RRM} | Reverse Recovery Current | — | 0.50 | — | A | $T_J = 25^\circ\text{C}$ |

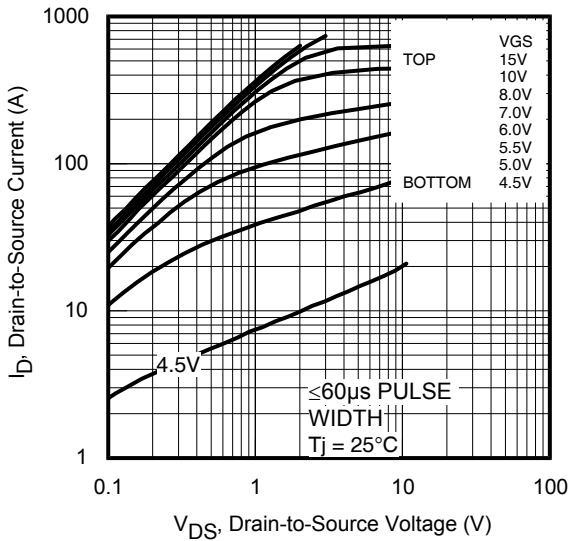


Fig. 1 Typical Output Characteristics

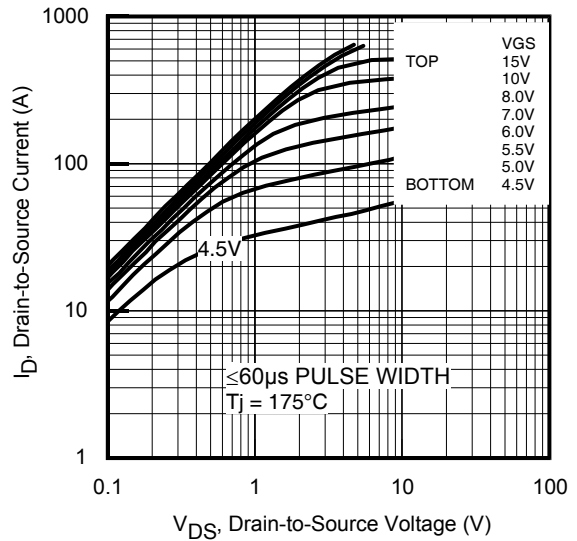


Fig. 2 Typical Output Characteristics

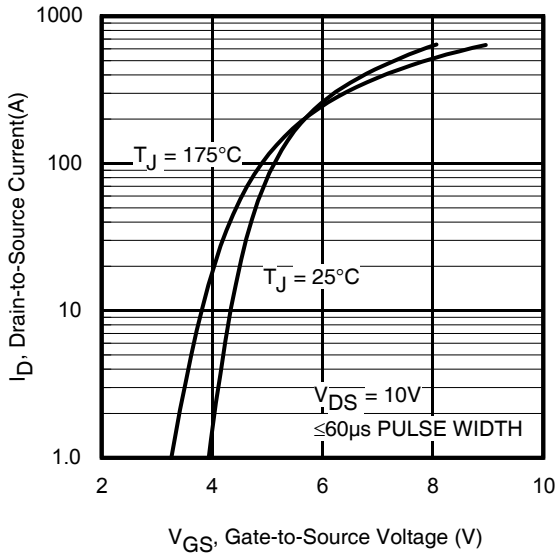


Fig. 3 Typical Transfer Characteristics

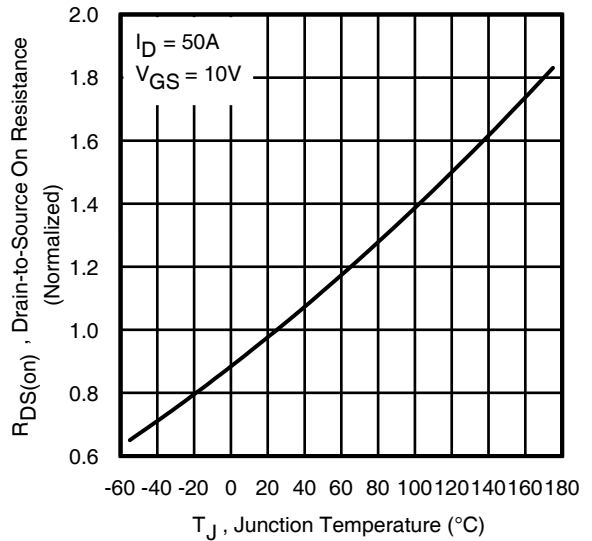


Fig. 4 Normalized On-Resistance vs. Temperature

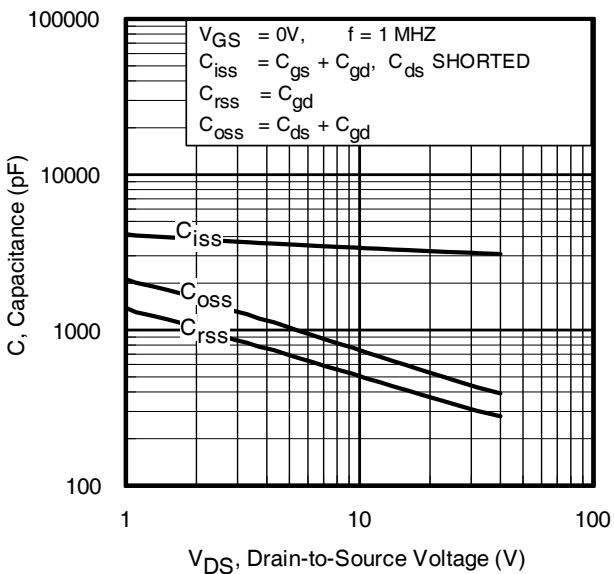


Fig. 5. Typical Capacitance vs. Drain-to-Source Voltage

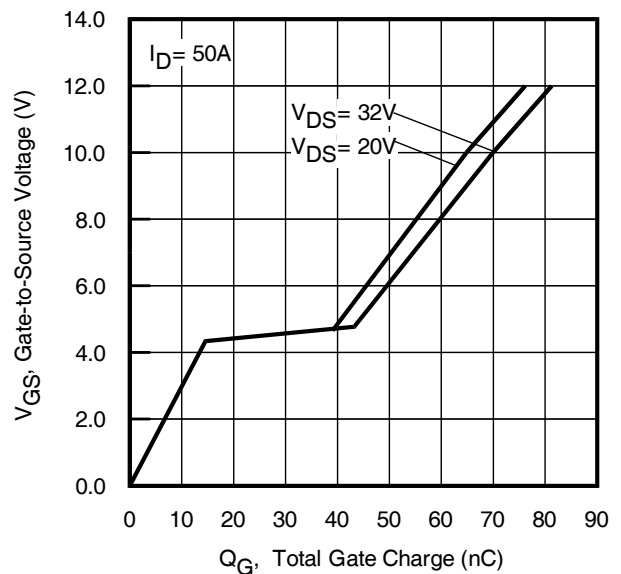


Fig. 6. Typical Gate Charge vs. Gate-to-Source Voltage

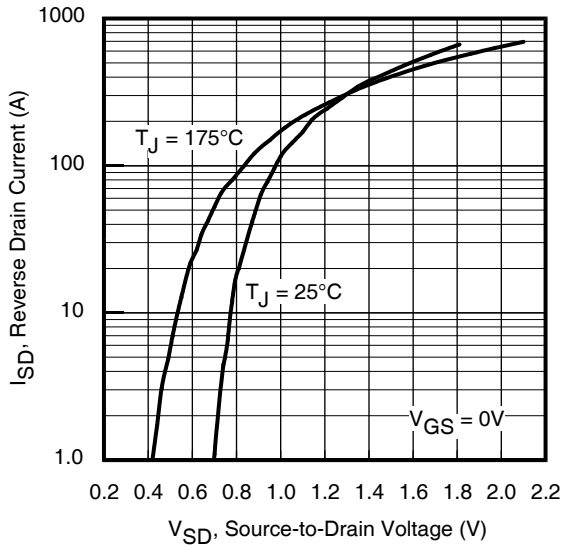


Fig. 7 Typical Source-to-Drain Diode Forward Voltage

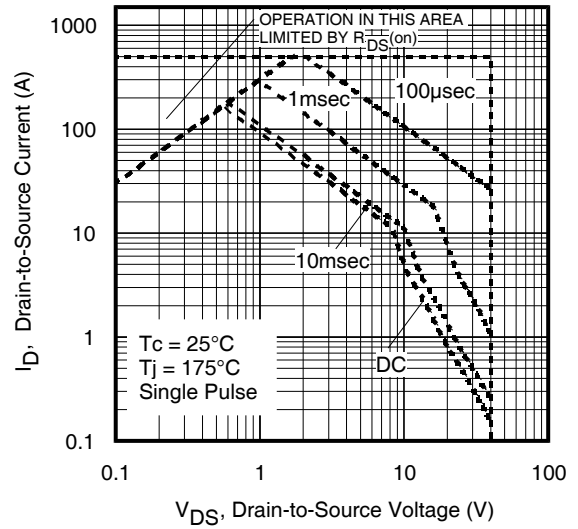


Fig. 8. Maximum Safe Operating Area

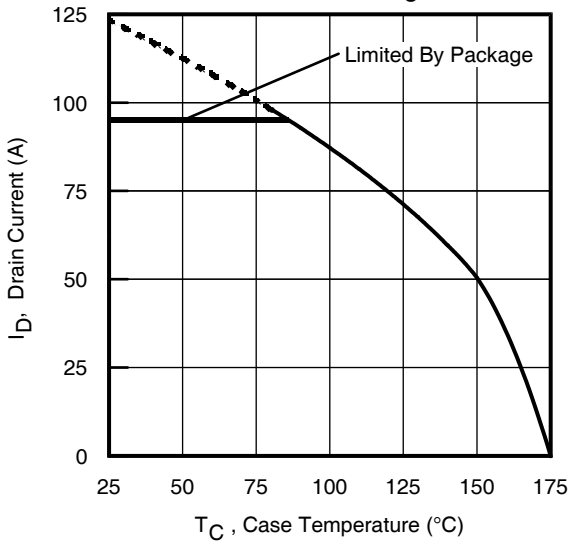


Fig 9. Maximum Drain Current vs. Case Temperature

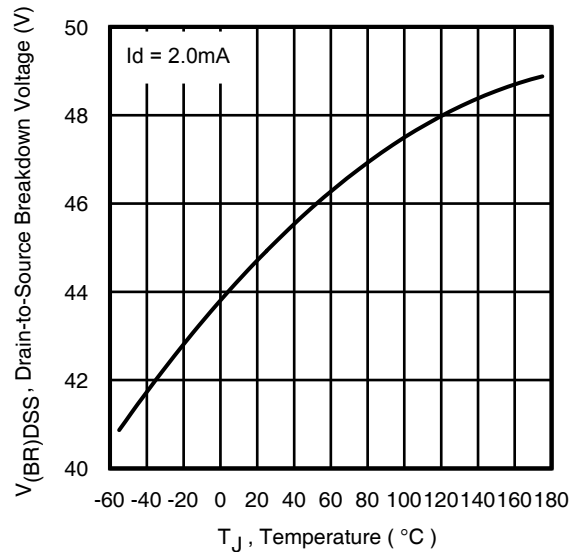


Fig 10. Drain-to-Source Breakdown Voltage

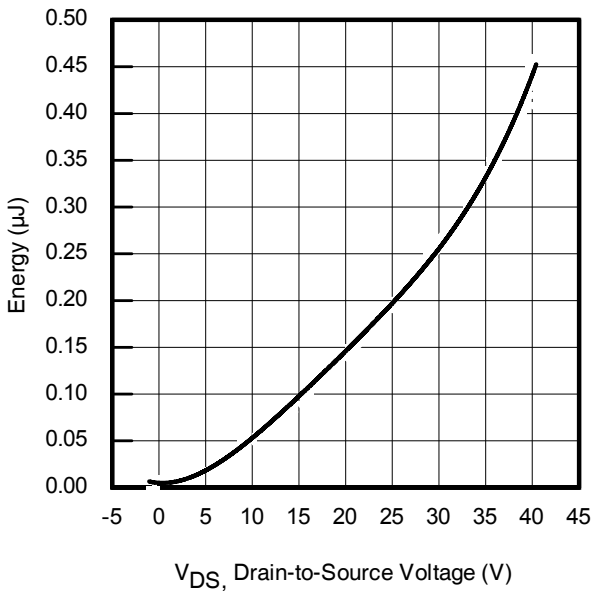


Fig 11. Typical C_{oss} Stored Energy

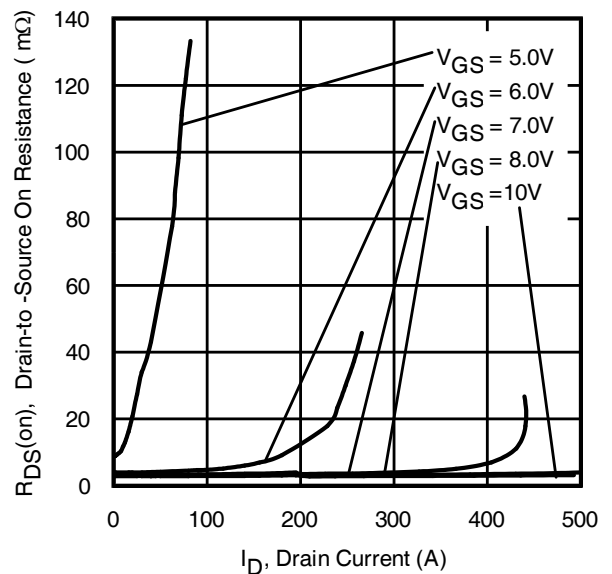


Fig 12. Typical On-Resistance vs. Drain Current

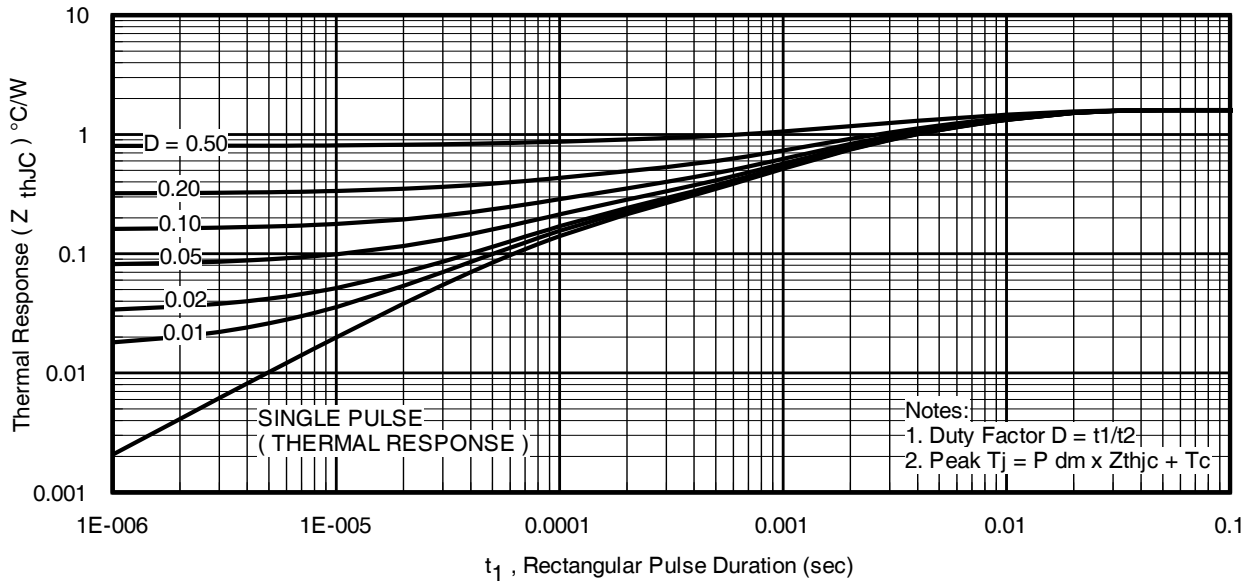


Fig 13. Maximum Effective Transient Thermal Impedance, Junction-to-Case

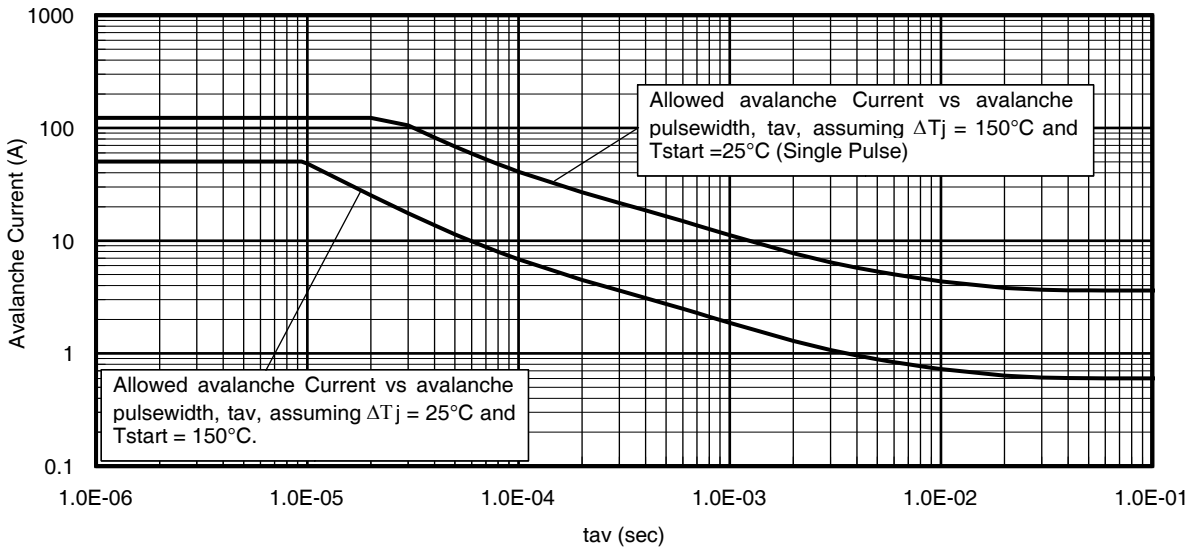


Fig 14. Typical Avalanche Current vs. Pulse Width

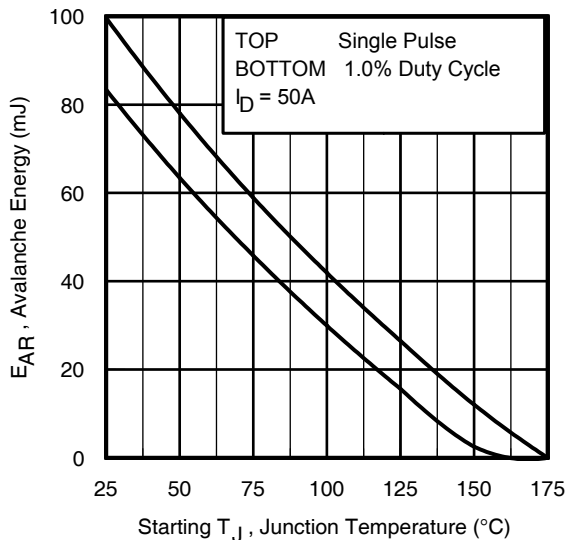


Fig 15. Maximum Avalanche Energy vs. Temperature

Notes on Repetitive Avalanche Curves, Figures 14, 15:
 (For further info, see AN-1005 at www.irf.com)

1. Avalanche failures assumption:
 Purely a thermal phenomenon and failure occurs at a temperature far in excess of T_{jmax} . This is validated for every part type.
2. Safe operation in Avalanche is allowed as long as T_{jmax} is not exceeded.
3. Equation below based on circuit and waveforms shown in Figures 16a, 16b.
4. $P_{D(ave)}$ = Average power dissipation per single avalanche pulse.
5. BV = Rated breakdown voltage (1.3 factor accounts for voltage increase during avalanche).
6. I_{av} = Allowable avalanche current.
7. ΔT = Allowable rise in junction temperature, not to exceed T_{jmax} (assumed as 25°C in Figure 14, 15).
 t_{av} = Average time in avalanche.
 D = Duty cycle in avalanche = $t_{av} \cdot f$
 $Z_{thJC}(D, t_{av})$ = Transient thermal resistance, see Figures 13)

$$P_{D(ave)} = 1/2 (1.3 \cdot BV \cdot I_{av}) = \Delta T / Z_{thJC}$$

$$I_{av} = 2\Delta T / [1.3 \cdot BV \cdot Z_{thJC}]$$

$$E_{AS(AR)} = P_{D(ave)} \cdot t_{av}$$

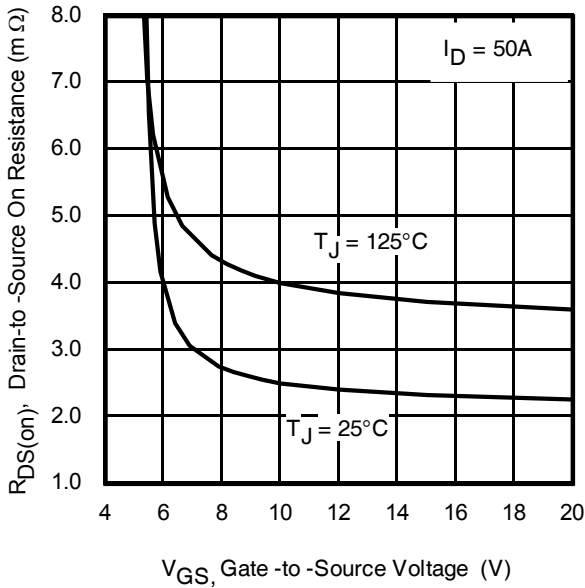


Fig 16. Typical On-Resistance vs. Gate Voltage

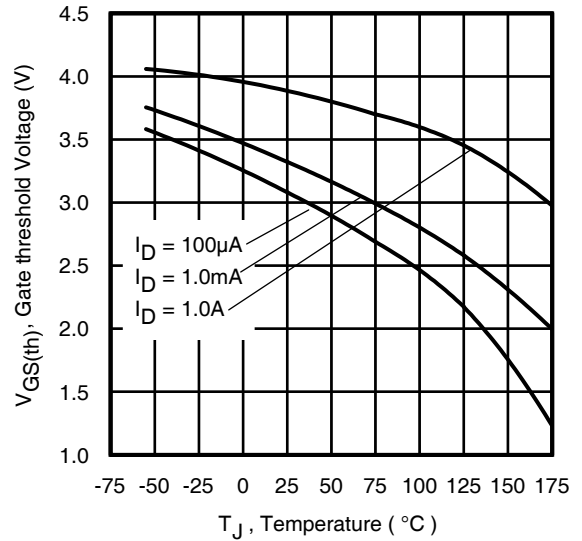


Fig 17. Threshold Voltage vs. Temperature

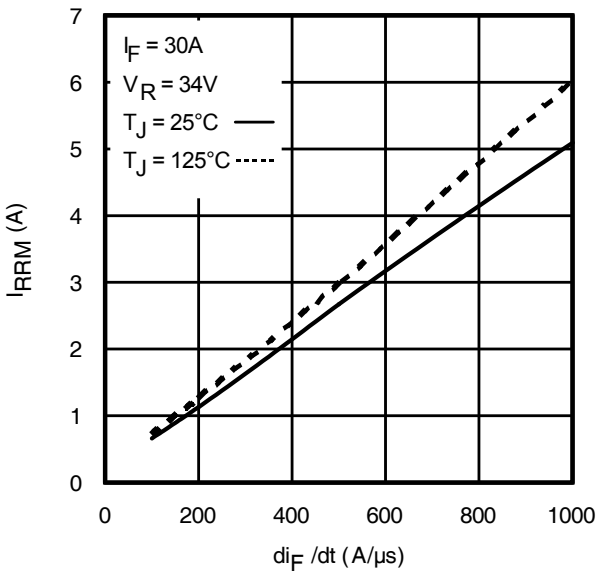


Fig 18 - Typical Recovery Current vs. di_F/dt

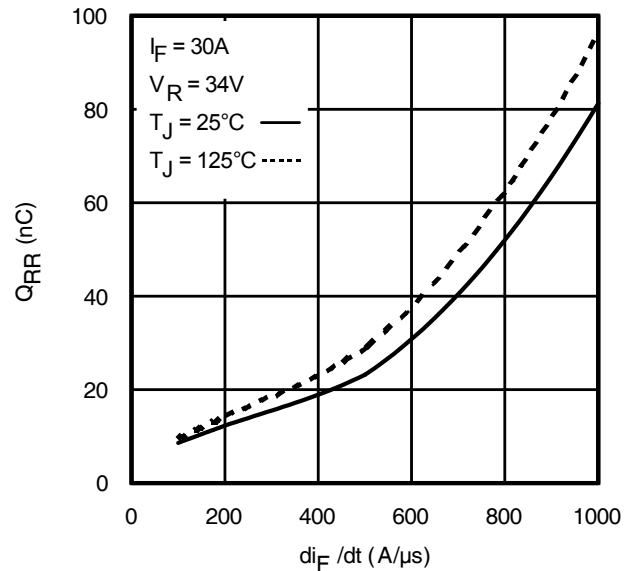


Fig. 19 - Typical Stored Charge vs. di_F/dt

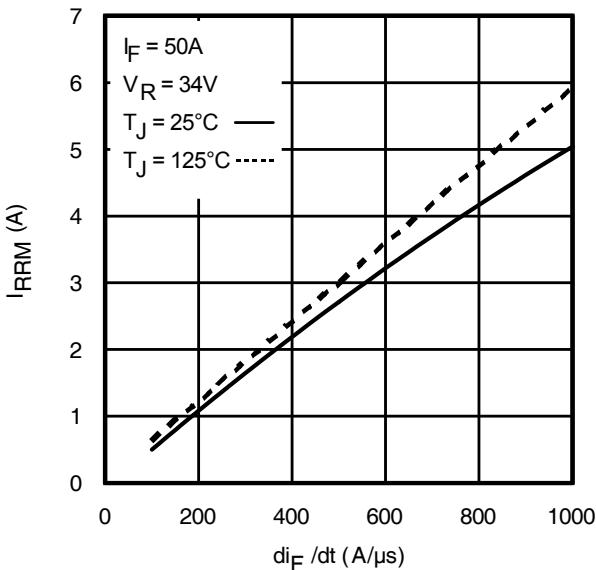


Fig. 20 - Typical Recovery Current vs. di_F/dt

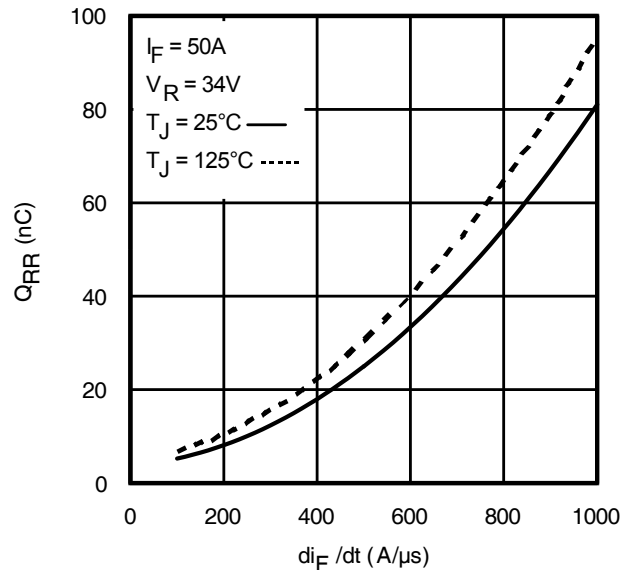


Fig. 21 - Typical Stored Charge vs. di_F/dt

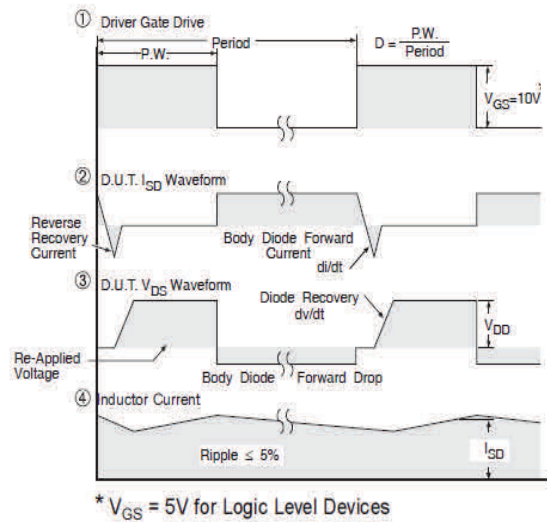
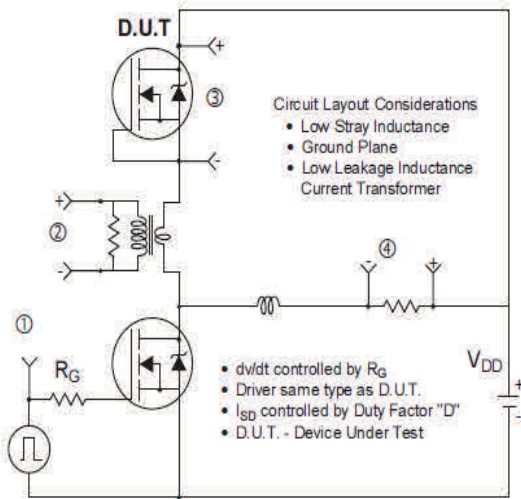


Fig 22. Peak Diode Recovery dv/dt Test Circuit for N-Channel HEXFET® Power MOSFETs

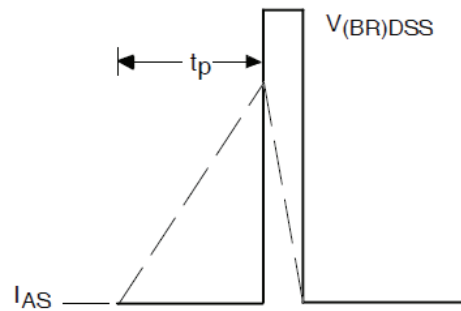
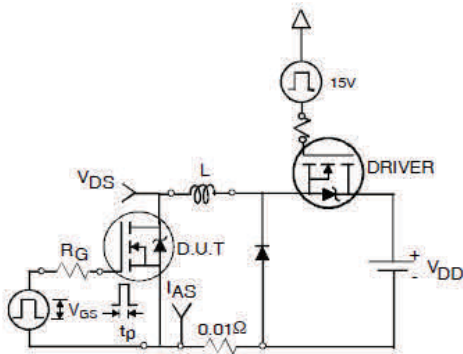


Fig 22a. Unclamped Inductive Test Circuit

Fig 22b. Unclamped Inductive Waveforms

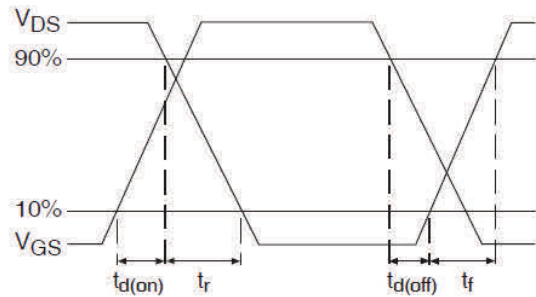
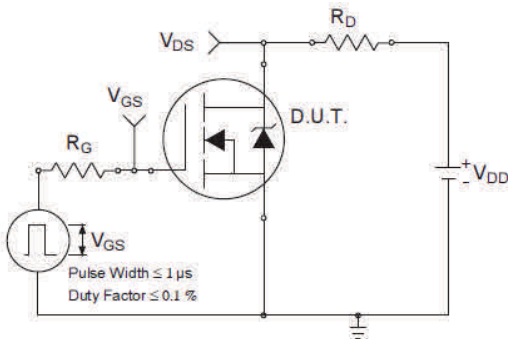


Fig 23a. Switching Time Test Circuit

Fig 23b. Switching Time Waveforms



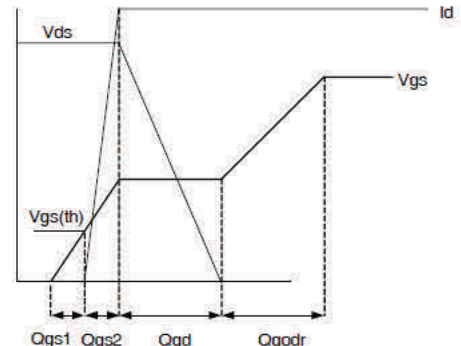



Fig 24a. Gate Charge Test Circuit

Fig 24b. Gate Charge Waveform

PQFN 5x6 Outline "E" Package Details

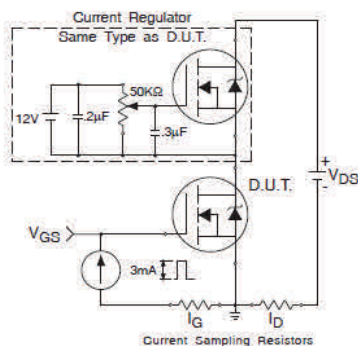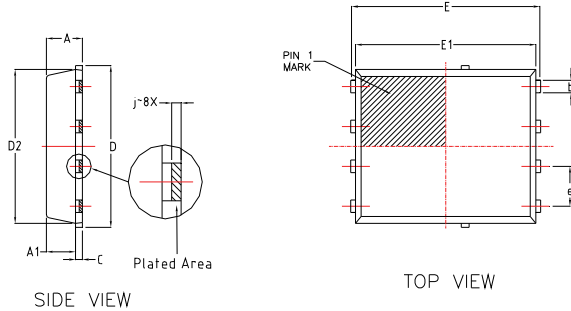


| D I M | MM | | |
|-------------|------------|-------|-------|
| | MIN | NOM | MAX |
| A | 0.90 | 1.10 | 1.17 |
| A1 | 0.824 | 0.897 | 0.97 |
| b | 0.33 | 0.41 | 0.50 |
| c | 0.150 | 0.20 | 0.250 |
| D | 4.80 | 4.98 | 5.15 |
| D1 | 3.91 | 4.22 | 4.36 |
| D2 | 4.80 | 4.90 | 5.00 |
| D3 | 3.85 | 4.00 | 4.15 |
| E | 5.90 | 6.05 | 6.15 |
| E1 | 5.65 | 5.76 | 5.85 |
| E2 | 1.10 | / | / |
| e | 1.27 BSC | | |
| L | 0.05 | 0.15 | 0.25 |
| L1 | 0.38 | 0.425 | 0.50 |
| L2 | 0.51 | 0.785 | 0.86 |
| H | 3.25 | 3.35 | 3.58 |
| I | 0 | / | 0.18 |
| j | 0.1015 BSC | | |

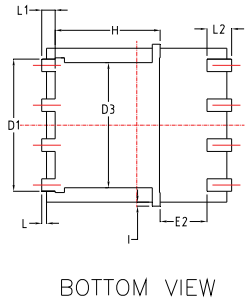


For footprint and stencil design recommendations, please refer to application note AN-1136 at <http://www.irf.com/technical-info/appnotes/an-1136.pdf>
 For visual inspection recommendations, please refer to application note AN-1154 at <http://www.irf.com/technical-info/appnotes/an-1154.pdf>

PQFN 5x6 Outline "E" Part Marking


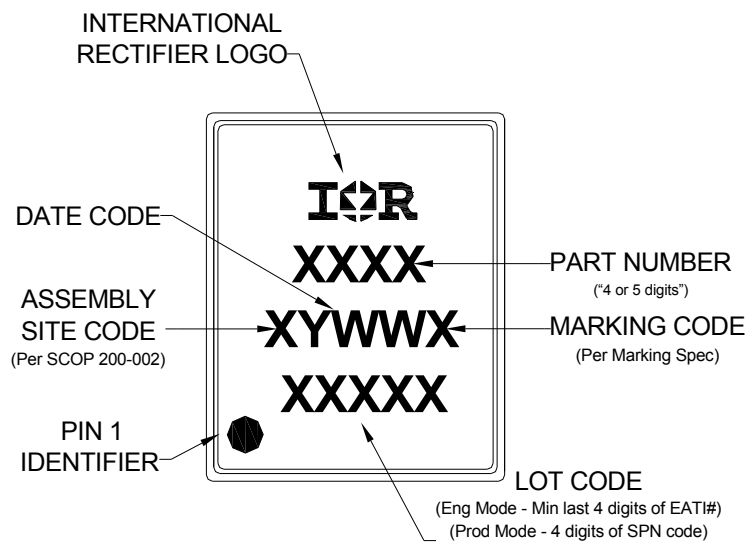


Note: For the most current drawing please refer to IR website at <http://www.irf.com/package/>


PQFN 5x6 Outline "E" Tape and Reel

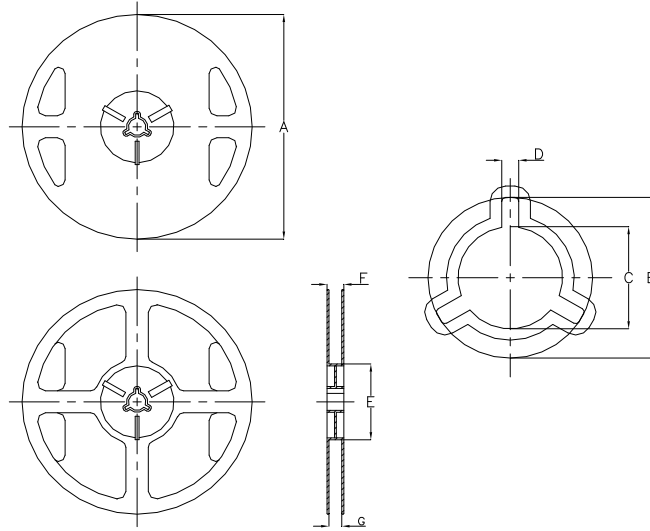

| REEL DIMENSIONS | | | | |
|-------------------------------|--------|-------|----------|--------|
| STANDARD OPTION (QTY 4000) TR | | | | |
| | METRIC | | IMPERIAL | |
| CODE | MIN | MAX | MIN | MAX |
| A | 329.5 | 330.5 | 12.972 | 13.011 |
| B | 20.9 | 21.5 | 0.823 | 0.846 |
| C | 12.8 | 13.5 | 0.504 | 0.532 |
| D | 1.7 | 2.3 | 0.067 | 0.091 |
| E | 97 | 99 | 3.819 | 3.898 |
| F | Ref | 17.4 | | |
| G | 13 | 14.5 | 0.512 | 0.571 |

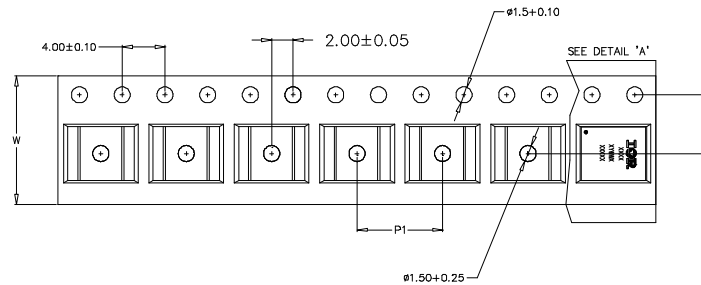

| | |
|----|-------------|
| Ao | 6.50 ±0.10 |
| Bo | 5.28 ±0.10 |
| F | 5.50 ±0.05 |
| P1 | 8.00 ±0.10 |
| W | 12.00 ±0.30 |

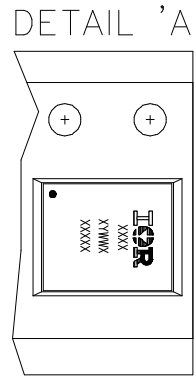

Note: For the most current drawing please refer to IR website at <http://www.irf.com/package/>

Qualification Information[†]

| | | | |
|-----------------------------------|------------------------------------|---|------|
| Qualification Level | | Automotive (per AEC-Q101) | |
| | | Comments: This part number(s) passed Automotive qualification. IR's Industrial and Consumer qualification level is granted by extension of the higher Automotive level. | |
| Moisture Sensitivity Level | | PQFN 5mm x 6mm | MSL1 |
| ESD | Machine Model | Class M3 (+/- 400V) ^{††} | |
| | | AEC-Q101-002 | |
| | Human Body Model | Class H1C (+/- 2000V) ^{††} | |
| | | AEC-Q101-001 | |
| Charged Device Model | Class C5 (+/- 2000V) ^{††} | | |
| | AEC-Q101-005 | | |
| RoHS Compliant | | Yes | |

† Qualification standards can be found at International Rectifier's web site: <http://www.irf.com/>

†† Highest passing voltage.

Notes:

- ① Repetitive rating; pulse width limited by max. junction temperature.
- ② Starting $T_J = 25^{\circ}\text{C}$, $L = 0.080\text{mH}$, $R_G = 50\Omega$, $I_{AS} = 50\text{A}$.
- ③ Pulse width $\leq 400\mu\text{s}$; duty cycle $\leq 2\%$.
- ④ R_{θ} is measured at T_J of approximately 90°C .
- ⑤ When mounted on 1" square PCB (FR-4 or G-10 Material). For recommended footprint and soldering techniques refer to application note #AN-994: <http://www.irf.com/technical-info/appnotes/an-994.pdf>
- ⑥ Calculated continuous current based on maximum allowable junction temperature.
- ⑦ Coss eff. (TR) is a fixed capacitance that gives the same charging time as Coss while VDS is rising from 0 to 80% VDSS.
- ⑧ Coss eff. (ER) is a fixed capacitance that gives the same energy as Coss while VDS is rising from 0 to 80% VDSS.

Revision History

| Date | Comments |
|------------|---|
| 05/08/2014 | • Updated typo on "Description" on page 1. |
| 07/08/2014 | • Updated typo on Gate Charge units from "S" to "nC" on page 2. • Removed extra GFS from Electrical Table on page 2. |
| 07/08/2015 | • Corrected $V_{GS(th)}$ min from 2.2V to 2.6V on page 2. • Updated "IFX logo" on all pages. |
| 09/01/2015 | • Corrected dv/dt from "1.3V/ns" to "2.4V/ns" on page 2. |

IMPORTANT NOTICE

Unless specifically designated for the automotive market, International Rectifier Corporation and its subsidiaries (IR) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or services without notice. Part numbers designated with the "AU" prefix follow automotive industry and / or customer specific requirements with regards to product discontinuance and process change notification. All products are sold subject to IR's terms and conditions of sale supplied at the time of order acknowledgment.

IR warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with IR's standard warranty. Testing and other quality control techniques are used to the extent IR deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

IR assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using IR components. To minimize the risks with customer products and applications, customers should provide adequate design and operating safeguards.

Reproduction of IR information in IR data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alterations is an unfair and deceptive business practice. IR is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of IR products or serviced with statements different from or beyond the parameters stated by IR for that product or service voids all express and any implied warranties for the associated IR product or service and is an unfair and deceptive business practice. IR is not responsible or liable for any such statements.

IR products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or in other applications intended to support or sustain life, or in any other application in which the failure of the IR product could create a situation where personal injury or death may occur. Should Buyer purchase or use IR products for any such unintended or unauthorized application, Buyer shall indemnify and hold International Rectifier and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that IR was negligent regarding the design or manufacture of the product.

Only products certified as military grade by the Defense Logistics Agency (DLA) of the US Department of Defense, are designed and manufactured to meet DLA military specifications required by certain military, aerospace or other applications. Buyers acknowledge and agree that any use of IR products not certified by DLA as military-grade, in applications requiring military grade products, is solely at the Buyer's own risk and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

IR products are neither designed nor intended for use in automotive applications or environments unless the specific IR products are designated by IR as compliant with ISO/TS 16949 requirements and bear a part number including the designation "AU". Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, IR will not be responsible for any failure to meet such requirements.

For technical support, please contact IR's Technical Assistance Center

<http://www.irf.com/technical-info/>

WORLD HEADQUARTERS:

101 N. Sepulveda Blvd., El Segundo, California 90245

Tel: (310) 252-7105

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View AUIRFN8403TR on WIN SOURCE](#)

 [Infineon Technologies](#) Information

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management