



**THE DATASHEET OF
VLS252015T-6R8MR73**



SMD Inductors(Coils) For Power Line(Wound, Magnetic Shielded)

Conformity to RoHS Directive

VLS Series VLS252015



FEATURES

- Miniature size
Mount area: 2.5×2mm
Height: 1.5mm max.
- Generic use for portable DC to DC converter line.
- High magnetic shield construction should actualize high resolution for EMC protection.
- Available for automatic mounting in tape and reel package.
- The products do not contain lead and support lead-free soldering.

APPLICATIONS

DVCs, DSCs, PDAs, LCD displays, cellular phones, HDDs, etc.


SHAPES AND DIMENSIONS



Dimensions in mm



RECOMMENDED PC BOARD PATTERN



Dimensions in mm

ELECTRICAL CHARACTERISTICS

Part No.	Inductance (μH)	Inductance tolerance (%)	Test frequency (MHz)	DC resistance (Ω)		Rated current(A)* Based on inductance change		Based on temperature rise typ.
				max.	typ.	max.	typ.	
				VLS252015T-1R0N1R7	1	± 30	1	
VLS252015T-1R5N1R4	1.5	± 30	1	0.12	0.1	1.9	2.18	1.4
VLS252015T-2R2M1R2	2.2	± 20	1	0.16	0.133	1.7	1.9	1.2
VLS252015T-3R3M1R0	3.3	± 20	1	0.218	0.182	1.4	1.57	1
VLS252015T-4R7MR89	4.7	± 20	1	0.318	0.265	1.2	1.35	0.89
VLS252015T-6R8MR73	6.8	± 20	1	0.48	0.4	1	1.13	0.73
VLS252015T-100MR66	10	± 20	1	0.588	0.49	0.82	0.93	0.66


* Rated current: Value obtained when current flows and the temperature has risen to 40°C or when DC current flows and the nominal value of inductance has fallen by 30%, whichever is smaller.

- Operating temperature range: -40 to +105°C (Including self-temperature rise)


TYPICAL ELECTRICAL CHARACTERISTICS

INDUCTANCE vs. DC SUPERPOSITION CHARACTERISTICS

VLS252015T-1R0N1R7

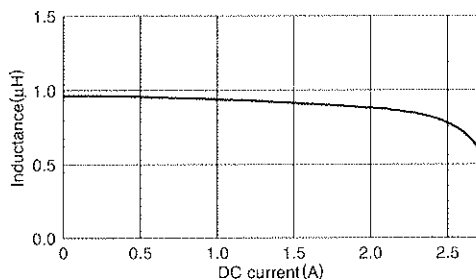


VLS252015T-1R5N1R4

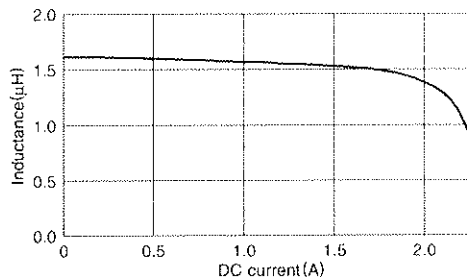


- Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.

- All specifications are subject to change without notice.


TYPICAL ELECTRICAL CHARACTERISTICS
INDUCTANCE vs. DC SUPERPOSITION CHARACTERISTICS
VLS252015T-2R2M1R2

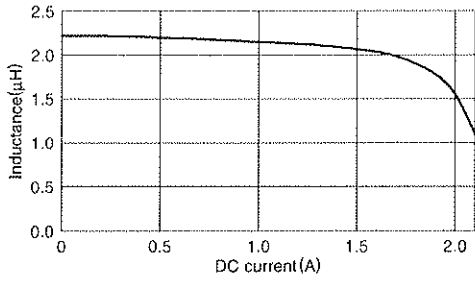


VLS252015T-3R3M1R0

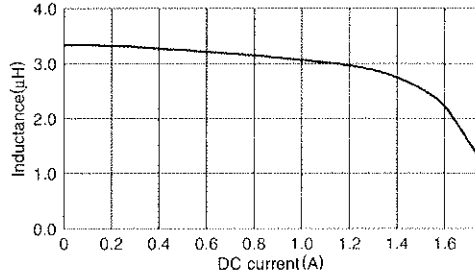


VLS252015T-4R7MR89

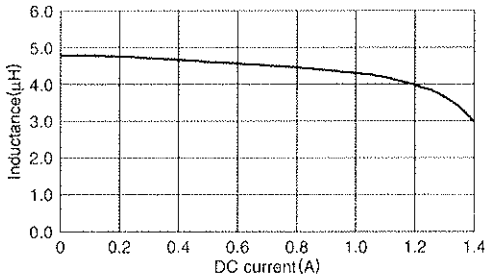


VLS252015T-6R8MR73

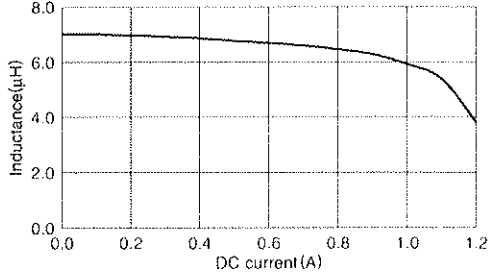

VLS252015T-100MR66

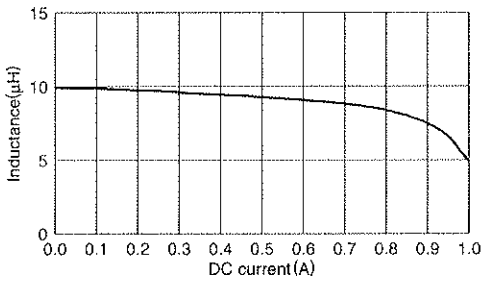

TEST CIRCUIT



• All specifications are subject to change without notice.

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View VLS252015T-6R8MR73 on WIN SOURCE](#)

 [TDK Corporation Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management