



THE DATASHEET OF BC847AT-TP





Micro Commercial Components



Micro Commercial Components
20736 Marilla Street Chatsworth
CA 91311
Phone: (818) 701-4933
Fax: (818) 701-4939

BC847AT, BT, CT

Features

- Halogen free available upon request by adding suffix "-HF"
Lead Free Finish/RoHS Compliant ("P" Suffix designates RoHS Compliant. See ordering information)
Epitaxial Die Construction
Complementary PNP Type Available (BC857AT,BT,CT)
Ultra-Small Surface Mount Package
Epoxy meets UL 94 V-0 flammability rating
Moisure Sensitivity Level 1

Maximum Data

- Case: SOT-523
Terminals: Solderable per MIL-STD-202, Method 208
Polarity: See Diagram
Marking:BC847AT--1E,BC847BT--1F,BC847CT-1G.


Maximum Ratings @ 25°C Unless Otherwise Specified

Table with 4 columns: Symbol, Parameter, Value, Units. Rows include OFF CHARACTERISTICS, V(BR)CEO, V(BR)CBO, V(BR)EBO, Ic, Pd, RthetaJA, Tj, Tstg.

Note: 1. Device mounted on FR-4 PCB with recommended pad layout

NPN
Surface Mount Small
Signal Transistor
150mW

SOT-523

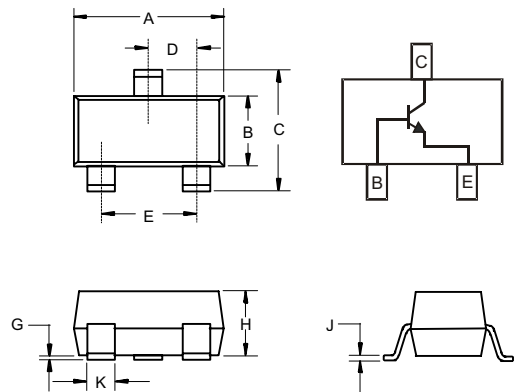

DIMENSIONS table with columns for DIM, INCHES (MIN, MAX), MM (MIN, MAX), and NOTE. Rows A through K.

Electrical Characteristics @ 25°C Unless Otherwise Specified

Symbol	Parameter	Min	Typ	Max	Units	Test Condition
OFF CHARACTERISTICS						
h _{FE}	DC Current Gain (Note 2)					V _{CE} =5.0V, I _C =2.0mA
	Current Gain A	110	---	222	---	
	B	200	290	450	---	
	C	420	520	800	---	
V _{CE(SAT)}	Collector-Emitter Saturation Voltage (Note 2)	---	---	250 600	mV	I _C =10mA, I _B =0.5mA I _C =100mA, I _B =5.0mA
V _{BE(SAT)}	Base-Emitter Saturation Voltage (Note 2)	---	700 900	---	mV	I _C =10mA, I _B =0.5mA I _C =100mA, I _B =5.0mA
V _{BE(ON)}	Base-Emitter Voltage (Note 2)	580 ---	660 ---	700 770	mV	V _{CE} =5.0V, I _C =2.0mA V _{CE} =5.0V, I _C =10mA
I _{CB0}	Collector-Cutoff Current (Note 2)	---	---	15	nA	V _{CB} =30V, I _E =0 V _{CB} =30V, T _J =125°C
I _{CBO}		---	---	5.0	μA	
f _T	Gain Bandwidth Product	100	---	---	MHz	V _{CE} =5.0V, I _C =10mA, f=100MHz
C _{CBO}	Collector-Base Capacitance	---	---	4.5	pF	V _{CB} =10V, f=1.0MHz
NF	Noise Figure	BC847BT	---	---	10	V _{CE} =5V, R _S =2.0Kohm, f=1.0MHz, BW=200HZ
		BC847CT	---	---	4.0	

Note: 2. Short duration pulse test used to minimize self-heating effect.



Micro Commercial Components

Ordering Information :

Device	Packing
Part Number-TP	Tape&Reel; 3Kpcs/Reel

Note : Adding "-HF" suffix for halogen free, eg. Part Number-TP-HF

IMPORTANT NOTICE

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes. **Micro Commercial Components Corp.** does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold **Micro Commercial Components Corp.** and all the companies whose products are represented on our website, harmless against all damages.

LIFE SUPPORT

MCC's products are not authorized for use as critical components in life support devices or systems without the express written approval of Micro Commercial Components Corporation.



CUSTOMER AWARENESS

Counterfeiting of semiconductor parts is a growing problem in the industry. Micro Commercial Components (MCC) is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. MCC strongly encourages customers to purchase MCC parts either directly from MCC or from Authorized MCC Distributors who are listed by country on our web page cited below. Products customers buy either from MCC directly or from Authorized MCC Distributors are genuine parts, have full traceability, meet MCC's quality standards for handling and storage. **MCC will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources.** MCC is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

www.mccsemi.com

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View BC847AT-TP on WIN SOURCE](#)
-  [Micro Commercial Co](#) Information

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management