





**THE DATASHEET OF**  
**9150006201**



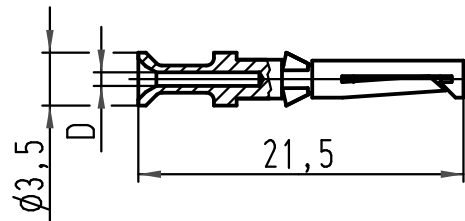

1) Nur für Buchanan Crimpwerkzeug Einstell $\phi$  1,0  
*only for Buchanan crimping tool adjusting  $\phi 0,1$*



Bestell-Nummer versilbert <i>silver plated</i>	/ Part No. vergoldet <i>gold plated</i>	D	Leiterquerschnitt <i>wire gauge</i>		Abisolierlänge der Litze <i>stripping length</i>
			mm <sup>2</sup>	AWG	
09 15 000 6204	09 15 000 6224	0,90	0,14-0,37	26-22	8
09 15 000 6203	09 15 000 6223	1,10	0,5	20	
09 15 000 6205	09 15 000 6225	1,30	0,75	18	
09 15 000 6202	09 15 000 6222	1,45	1	18	
09 15 000 6201	09 15 000 6221	1,75	1,5	16	6
09 15 000 6206	09 15 000 6226	2,25	2,5	14	
09 15 000 6207	09 15 000 6227	0,90	0,14-0,37	26-22	8

All Dimensions in mm Original Size DIN A 4	Techn. Character.			Nicht tolerierte Maße/ Free size tolerances	
		Dat.	Name	Maßstab/ Scale	
	Detail.	16.06.10	Rull	2:1	
	Insp.		Sch		
	Stand.				
A	HARTING Electric GmbH & Co. KG D-32339 Espelkamp			Han D / Buchsenkontakt Crimpkontakt gedreht 10A <i>crimpcontact twisted 10A</i>	
Mod.	Dat.	Name	TB 09 15 000 62..		Blatt/ page
			Sub. TB 09 15 000 62.. v. 22.03.99		

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View 9150006201 on WIN SOURCE](#)

 [HARTING](#) Information

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management