

LOW EMI CURRENT SENSE HIGH SIDE SWITCH


Features

- Load current feedback
- Programmable over current shutdown
- Active clamp
- ESD protection
- Input referenced to Vcc
- Over temperature shutdown
- Switching time optimized for low EMI
- Reverse battery protection

Description

The IR3316(S)PbF is a fully protected 4 terminals high side switch. The input signal is referenced to Vcc. When the input voltage $V_{cc} - V_{in}$ is higher than the specified threshold, the output power Mosfet is turned on. When the $V_{cc} - V_{in}$ is lower than the specified V_{il} threshold, the output Mosfet is turned off. A current proportional to the power Mosfet current is sourced to the Ifb pin. Over current shutdown occurs when $V_{st} - V_{in} > 4.5V$. The current shutdown threshold is adjusted by selecting the proper Rlfb. Either over current and over temperature latches off the switch. The device is reset by pulling the input pin high. Other integrated protections (ESD, reverse battery, active clamp) make the switch very rugged in automotive environment.

Typical Connection

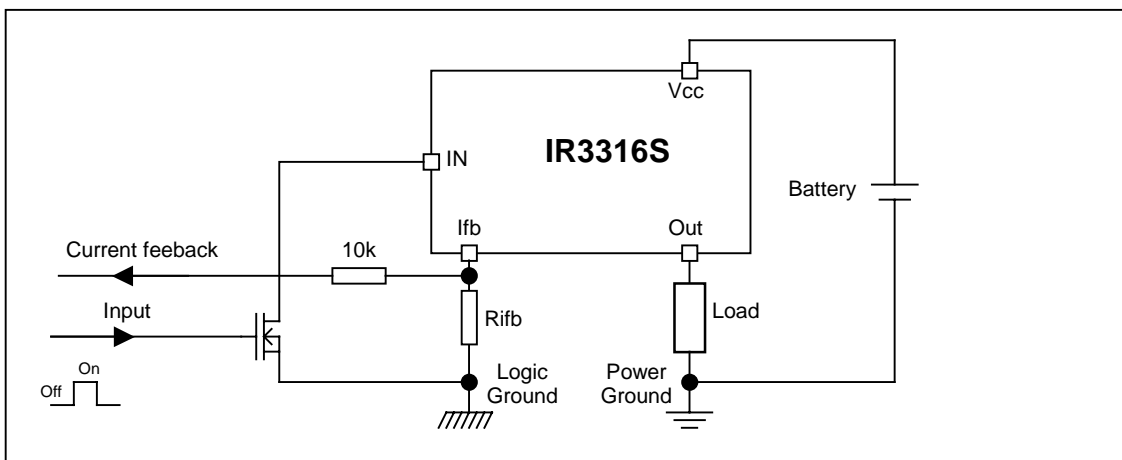

Product Summary

| | |
|-----------------|-----------|
| Rds(on) | 7 mΩ max. |
| Vcc op. | 6 to 26V |
| Current Ratio | 8800 |
| Prog. Ishutdown | 10 to 90A |
| Vclamp | 40V |

Packages



TO-220
IR3316



D2Pak
Pin 4 and 5 fused
IR3316S

Absolute Maximum Ratings

Absolute maximum ratings indicate sustained limits beyond which damage to the device may occur. All voltage parameters are referenced to Vcc lead. (Tambient=25°C unless otherwise specified).

| Symbol | Parameter | Min. | Max. | Units |
|---------------|---|------|------|-------|
| Vcc-Vin | Maximum Vcc voltage | -16 | 37 | V |
| Vcc-Vin cont. | Maximum continuous Vcc voltage | -16 | 26 | |
| Vcc-Vfb | Maximum lfb voltage | -16 | 33 | |
| Vcc-Vout | Maximum output voltage | -0.3 | 37 | |
| Ids cont. | Maximum body diode continuous current Rth=60°C/W (1) | — | 2.8 | A |
| Ids pulsed | Maximum body diode pulsed current (1) | — | 100 | |
| Pd | Maximum power dissipation Rth=60°C/W | — | 2 | W |
| ESD1 | Electrostatic discharge voltage (Human body) C=100pF, R=1500Ω | — | 4 | kV |
| ESD2 | Electrostatic discharge voltage (Machine Model) C=200pF, R=0Ω | — | 0.5 | |
| Tj max. | Max. storage & operating temperature junction temperature | -40 | 150 | °C |
| Min Rfb | Minimum on the resistor on lfb pin | 0.3 | — | kΩ |
| lfb max. | Max. lfb current | -50 | 50 | mA |

(1) Limited by junction temperature. Pulsed is also limited by wiring

Thermal Characteristics

| Symbol | Parameter | Typ. | Max. | Units |
|--------|--|------|------|-------|
| Rth1 | Thermal resistance junction to ambient D ² -Pak Std footprint | 60 | — | °C/W |
| Rth2 | Thermal resistance junction to case D ² -Pak | 0.7 | — | |
| Rth2 | Thermal resistance junction to case TO220 | 0.7 | — | |

Recommended Operating Conditions

These values are given for a quick design. For operation outside these conditions, please consult the application notes.

| Symbol | Parameter | Min. | Max. | Units |
|------------|-------------------------------------|------|------|-------|
| Iout | Continuous output current | — | 23 | A |
| | Tambient=85°C, Rth=5°C/W, Tj=125°C | | | |
| | Tambient=85°C, Rth=60°C/W, Tj=125°C | | | |
| Rlfb | Recommended lfb resistor (2)(3) | 0.5 | 3.5 | kΩ |
| Pulse min. | Minimum turn-on pulse width | 1 | — | ms |
| Fmax. | Maximum operating frequency | — | 200 | Hz |

2) If Rlfb is too low, the device can be damaged.

3) If Rlfb is too high, the device may not switch on.

Protection Characteristics

T_j=25°C, R_{ifb}=500 to 5kΩ

| Symbol | Parameter | Min. | Typ. | Max. | Units | Test Conditions |
|------------------------------------|---------------------------------------|------|------|------|-------|---|
| V _{fb-Vin@I_{sd}} | Over-current shutdown threshold | 4 | 4.7 | 5.6 | V | |
| T _{sd} | Over temperature threshold | — | 165 | — | °C | See fig. 5 |
| OV | Over voltage protection (not latched) | 26 | 29 | 33 | V | |
| I _{sd} f | Fixed over current shutdown | 90 | 120 | 140 | A | V _{fb} <V _{fb-Vin@I_{sd}} |
| I _{sd_1k} | Programmable over current shutdown 1k | 30 | 40 | 50 | | R _{ifb} =1kΩ |
| T _{reset} | Time to reset protection | — | 50 | 500 | μs | See fig. 5 |
| Min. pulse | Min. pulse width (no WAIT state) | 400 | 900 | 2000 | | |
| WAIT | WAIT function timer | 0.4 | 1 | 2 | ms | See fig. 4 and 5 |
| R _{ds(on) rev.} | Reverse battery On state resistance | 4 | 6.7 | 10 | mΩ | V _{cc-Vin} =-14V, I _{out} =30A |

Static Electrical Characteristics

T_j=25°C, V_{cc}=14V (unless otherwise specified)

| Symbol | Parameter | Min. | Typ. | Max. | Units | Test Conditions |
|---------------------|---|------|------|------|-------|--|
| V _{cc op.} | Operating Voltage range | 6 | — | 26 | V | |
| I _{cc off} | Supply leakage current | — | 1.5 | 5 | μA | V _{in} =V _{cc} , V _{cc-Vout} =14V, V _{cc-Vifb} =14V |
| I _{in, on} | On state I _N positive current | 1.5 | 3 | 6 | mA | V _{cc-Vin} =14V |
| V _{ih} | High level Input threshold voltage (4) | — | 5.4 | 6.2 | V | |
| V _{il} | Low level Input threshold voltage (4) | 4 | 4.9 | 5.8 | | |
| V _{hyst} | Input hysteresis V _{ih} -V _{il} | 0.2 | 0.4 | 1 | | |
| I _{out} | Drain to source leakage current | — | 1.2 | 5 | μA | V _{in} =V _{cc} , V _{cc-Vifb} =0V, V _{cc-Vout} =14V |
| R _{ds(on)} | On state resistance (5) T _j =25°C | 4 | 5.5 | 7 | mΩ | I _{out} =30A, V _{cc-Vin} =14V |
| | On state resistance (5) T _j =25°C | 4 | 6 | 10 | | I _{out} =17A, V _{cc-Vin} =6V |
| | On state resistance (5)(6) T _j =150°C | 7 | 10.5 | 13.5 | | I _{out} =30A, V _{cc-Vin} =14V |
| V _{clamp1} | V _{cc} to V _{out} clamp voltage 1 | 36 | 39 | — | V | I _{out} =50mA |
| V _{clamp2} | V _{cc} to V _{out} clamp voltage 2 | — | 40 | 43 | | I _{out} =30A |

(4) Input thresholds are measured directly between the input pin and the tab. Any parasitic resistance in common between the load current path and the input signal path can significantly affect the thresholds.

(5) R_{ds(on)} is measured between the tab and the Out pin, 5mm away from the package.

(6) Guaranteed by design

Switching Electrical Characteristics

V_{cc}=14V, Resistive load=0.5Ω, T_j=25°C

| Symbol | Parameter | Min. | Typ. | Max. | Units | Test Conditions |
|-------------------|---|------|------|------|-------|-----------------|
| T _{don} | Turn on delay time to 10% V _{cc} | 30 | 120 | 300 | μs | See figure 2 |
| T _{r1} | Rise time to V _{cc-Vout} =5V | 20 | 50 | 125 | | |
| T _{r2} | Rise time to V _{cc-Vout} =0.1V _{cc} | 30 | 80 | 200 | | |
| E _{on} | Turn on energy | — | 14 | — | mJ | |
| T _{doff} | Turn off delay time | 30 | 140 | 350 | μs | |
| T _f | Fall time to V _{out} =10% of V _{cc} | 35 | 100 | 250 | | |
| E _{off} | Turn off energy | — | 7 | — | mJ | |

Lead Assignments

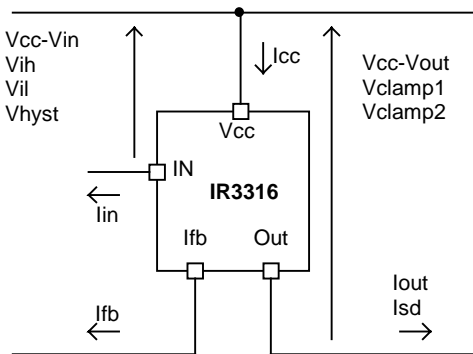
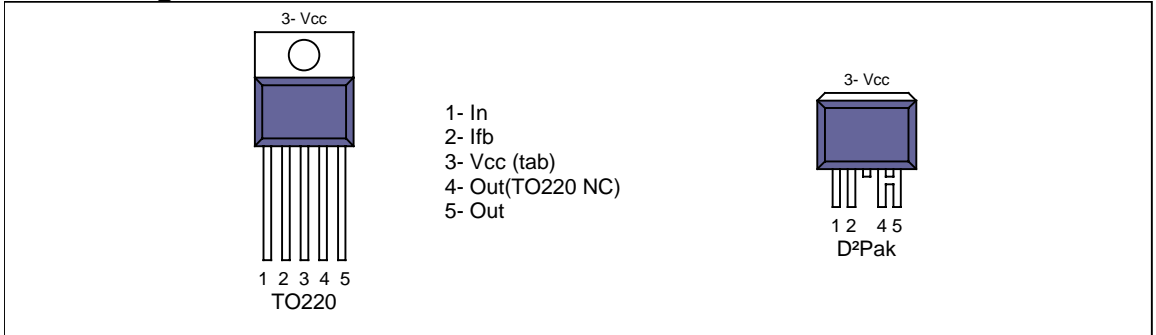


Figure 1 – Voltages and current definitions

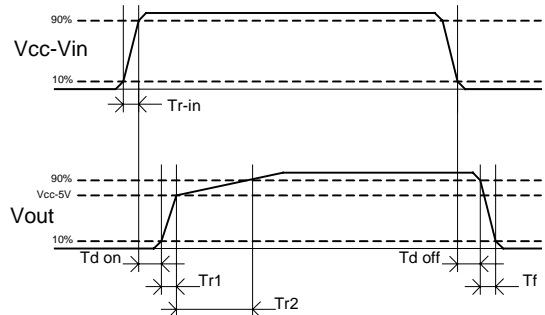


Figure 2 – Switching time definitions

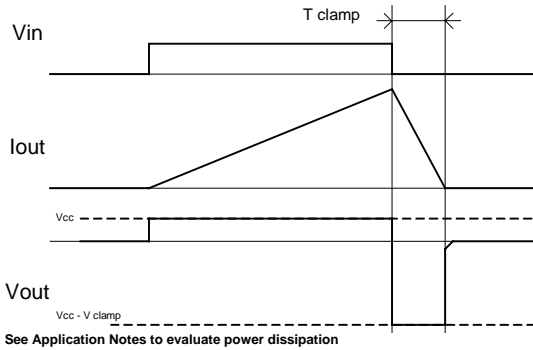


Figure 3 – Active clamp waveforms

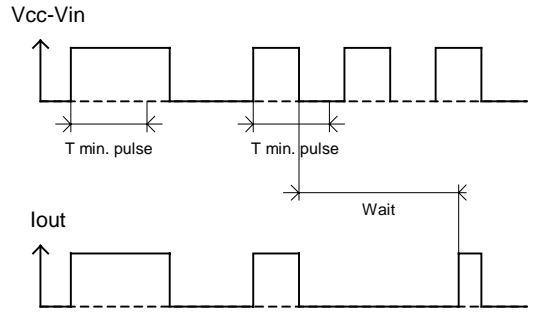


Figure 4 – Min. pulse and Wait function

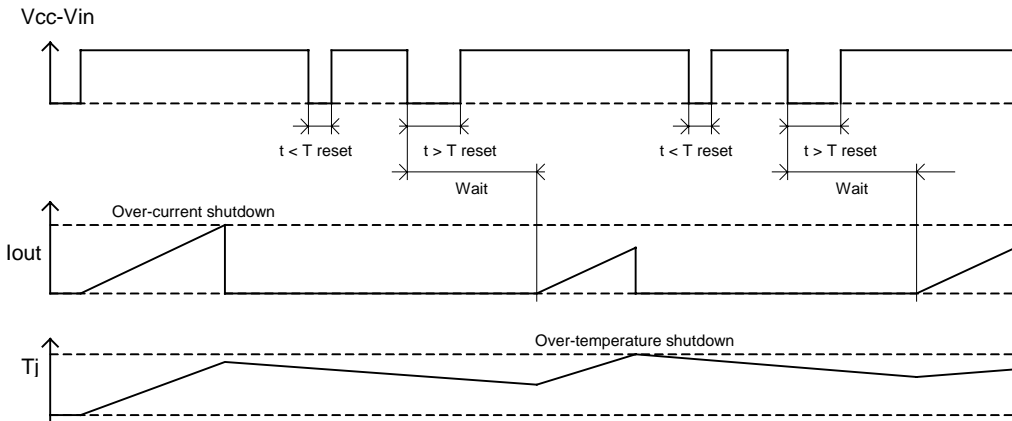


Figure 5 – Protection Timing Diagrams

All curves are typical characteristics. Operation in hatched areas is not recommended. $T_j=25^{\circ}\text{C}$, $R_{\text{th}}=500\text{ohm}$, $V_{\text{cc}}=14\text{V}$ (unless otherwise specified).

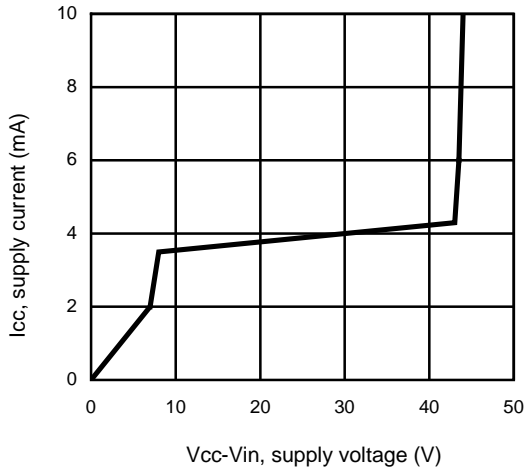


Figure 6 – Icc (mA) Vs Vcc-Vin (V)

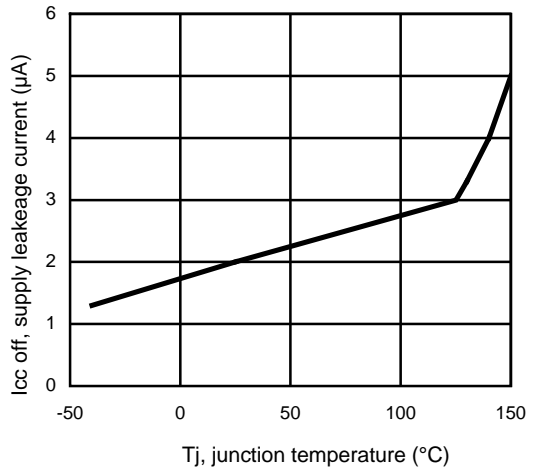


Figure 7 – Icc off (μA) Vs Tj (°C)

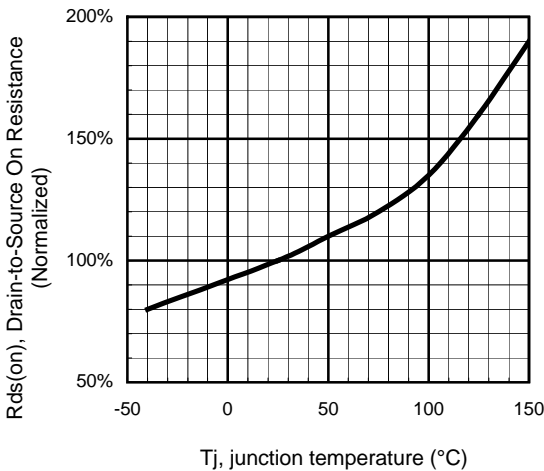


Figure 8 - Normalized Rds(on) (%) Vs Tj (°C)

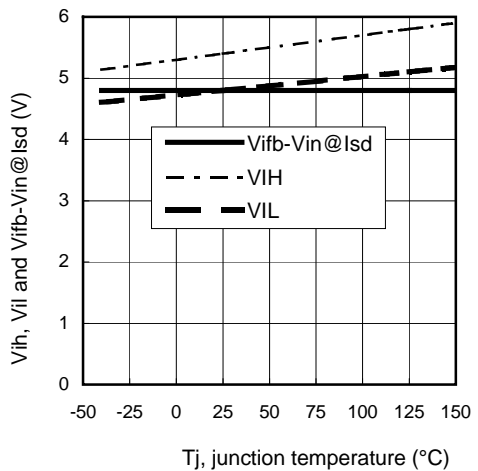


Figure 9 – Vih, Vil and Vf(b)-Vin@I(s,d) (V) Vs Tj (°C)

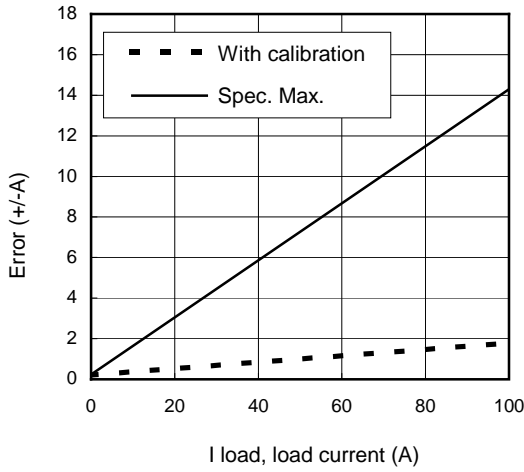


Figure 10 – Error (+/- A) Vs I load (A)

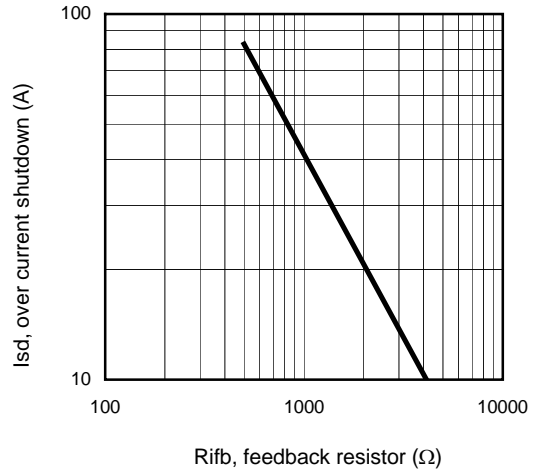


Figure 11 – Ids (A) Vs Rifb (Ω)

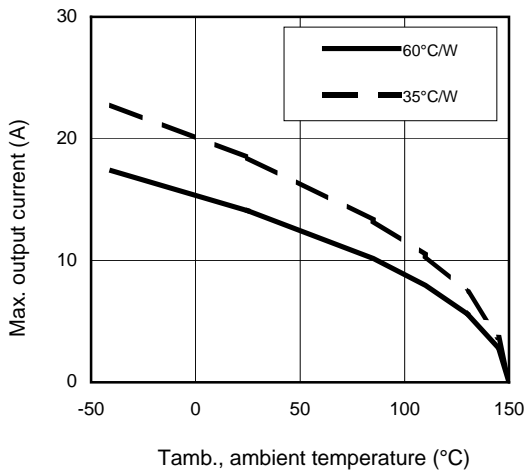


Figure 12 – Max. iout (A) Vs Tamb. (°C)

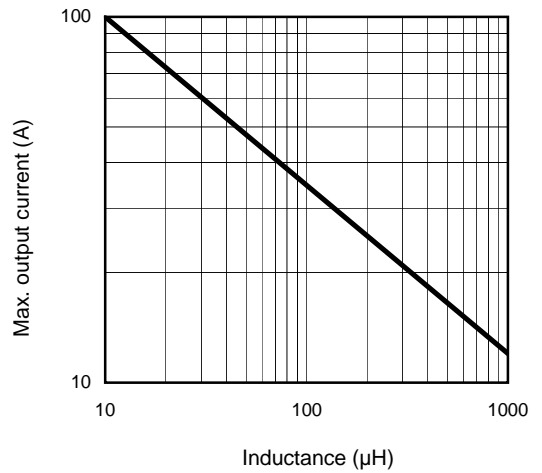


Figure 13 – Max. iout (A) Vs inductance (μH)

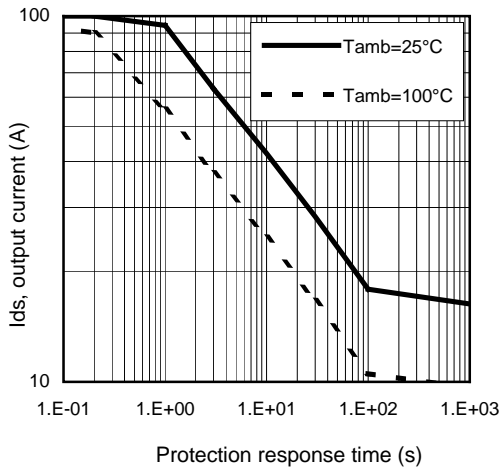


Figure 14 – Ids (A) Vs over temperature protection response time (s)



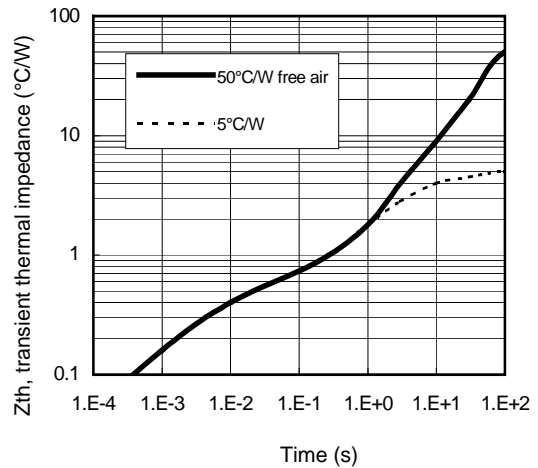


Figure 15 – Transient thermal impedance (°C/W) Vs time (s)

Case Outline 5 Lead - D2PAK - Automotive Q100 PbF MSL1 qualified



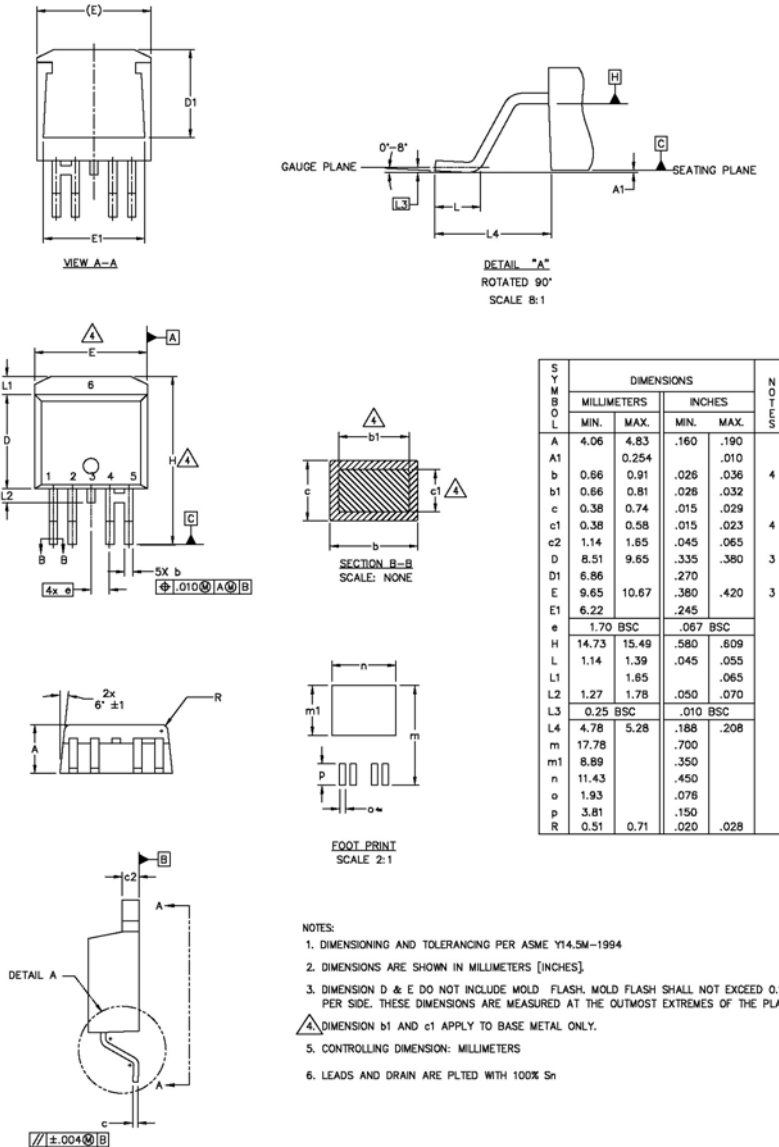


Tape & Reel 5 Lead - D2PAK

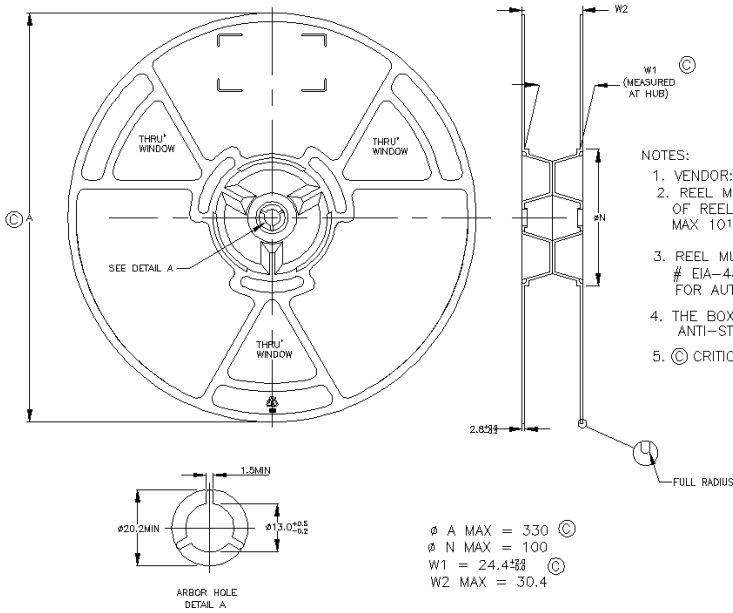

- NOTES:
1. VENDOR: OPTIONAL
 2. REEL MUST HAVE ANTI-STATIC COATING SURFACE RESISTIVITY OF REEL (AS PER EIA-541) $\mu\text{in: } 10^9 \text{ ohm/SQUARE}$; MAX $10^{12} \text{ ohm/SQUARE}$
 3. REEL MUST ALSO MEET REQUIREMENTS OF EIA STANDARD # EIA-481A, TAPING OF SURFACE-MOUNT COMPONENTS FOR AUTOMATIC PLACEMENT.
 4. THE BOX OF PACKING MUST CONTAIN THE REELS INSIDE AN ANTI-STATIC BAG.
 5. © CRITICAL

Case Outline 5 Leads – TO220 – Automotive Q100 PbF qualified

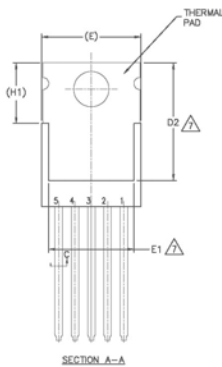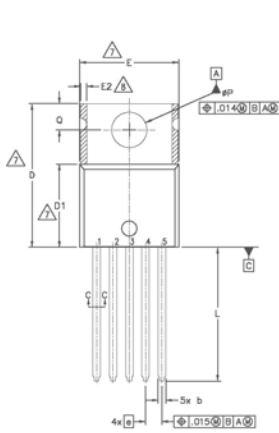

| DIMENSION | DIMENSIONS | | | | NOMINAL VALUE |
|-----------|-------------|-------|----------|------|---------------|
| | MILLIMETERS | | INCHES | | |
| | MIN. | MAX. | MIN. | MAX. | |
| A | 3.56 | 4.83 | .140 | .190 | |
| A1 | 0.51 | 1.40 | .020 | .055 | |
| A2 | 2.03 | 2.92 | .080 | .115 | |
| b | 0.64 | 0.89 | .025 | .035 | |
| bt | 0.64 | 0.84 | .025 | .033 | 5 |
| c | 0.36 | 0.61 | .014 | .024 | |
| c1 | 0.36 | 0.56 | .014 | .022 | 5 |
| D | 14.22 | 16.51 | .560 | .650 | 4 |
| D1 | 6.38 | 9.02 | .330 | .355 | |
| D2 | 11.68 | 12.88 | .460 | .507 | 7 |
| E | 9.65 | 10.67 | .380 | .420 | 4,7 |
| E1 | 6.86 | 8.89 | .270 | .350 | 7 |
| E2 | - | 0.76 | - | .030 | 8 |
| e | 1.70 BSC | | .067 BSC | | |
| H1 | 5.84 | 6.96 | .230 | .270 | 7,8 |
| L | 12.70 | 14.73 | .500 | .580 | |
| ϕP | 3.53 | 3.73 | .139 | .147 | |
| Q | 2.54 | 3.05 | .100 | .120 | |

- NOTES:
- 1.- DIMENSIONING AND TOLERANCING AS PER ASME Y14.5 M-1994.
 - 2.- DIMENSIONS ARE SHOWN IN INCHES [MILLIMETERS].
 - 3.- LEAD DIMENSION AND FINISH UNCONTROLLED IN L1.
 - 4.- DIMENSION D1, D1 & E DO NOT INCLUDE MOLD FLASH. MOLD FLASH SHALL NOT EXCEED .005" (0.127) PER SIDE. THESE DIMENSIONS ARE MEASURED AT THE OUTERMOST EXTREMES OF THE PLASTIC BODY.
 - 5.- DIMENSION bt & c1 APPLY TO BASE METAL ONLY.
 - 6.- CONTROLLING DIMENSION - INCHES.
 - 7.- THERMAL PAD CONTOUR OPTIONAL WITHIN DIMENSIONS E,H1,D2 & E1.
 - 8.- DIMENSION E2 X H1 DEFINE A ZONE WHERE STAMPING AND SINGULATION IRREGULARITIES ARE ALLOWED.
 - 9.- OUTLINE CONFORMS TO JEDEC TO-220, EXCEPT A2 (max.) AND D3 (min.) WHERE DIMENSIONS ARE DERIVED FROM THE ACTUAL PACKAGE OUTLINE.
 - 10.- LEADS AND DRAIN ARE PLATED WITH 100% Sn

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- ⊖ [View IR3316STRRPBF on WIN SOURCE](#)
- ⊖ [Infineon Technologies](#) Information

Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management