

DATA SHEET

| | |
|------------------|-----------------|
| Part No. | AN78L06M |
| Package Code No. | HSIP003-P-0000Q |

Maintenance/Discontinued includes following lifecycle stage.
planned maintenance type
maintenance type
planned discontinued type
discontinued type
Please visit following URL about latest information.
<http://www.semicon.panasonic.co.jp/en/>

Contents

| | |
|--|---|
| ■ Overview | 3 |
| ■ Features | 3 |
| ■ Applications | 3 |
| ■ Package | 3 |
| ■ Type | 3 |
| ■ Block Diagram | 4 |
| ■ Pin Descriptions | 5 |
| ■ Absolute Maximum Ratings | 6 |
| ■ Electrical Characteristics | 7 |
| ■ Electrical Characteristics (Reference values for design) | 8 |
| ■ Technical Data | 9 |

Maintenance/Discontinued includes following four Product lifecycle stage.
Discontinued type
planned maintenance type
maintenance type
planned discontinued type
discontinued type
Please visit following URL about latest information.
<http://www.semicon.panasonic.co.jp/en/>

AN78L06M

3-pin positive output voltage regulator (100 mA type)

■ Overview

The AN78LxxM series are 3-pin, fixed positive output type monolithic voltage regulators.

Stabilized fixed output voltage is obtained from unstable DC input voltage without using any external components.

12 types of fixed output voltage are available; 4 V, 5 V, 6 V, 7 V, 8 V, 9 V, 10 V, 12 V, 15 V, 18 V, 20 V and 24 V.

They can be used widely in power circuits with current capacity of up to 100 mA.

The AN78L06M is the 6 V output voltage type in these series.

■ Features

- No external components
- Output voltage: 6 V
- Built-in overcurrent limit circuit
- Built-in thermal overload protection circuit

■ Applications

- 3-pin positive output voltage regulator (100 mA type)


■ Package

- 3-pin plastic single inline package with heat sink (SIP type)

■ Type

- Silicon monolithic bipolar IC

■ Block Diagram

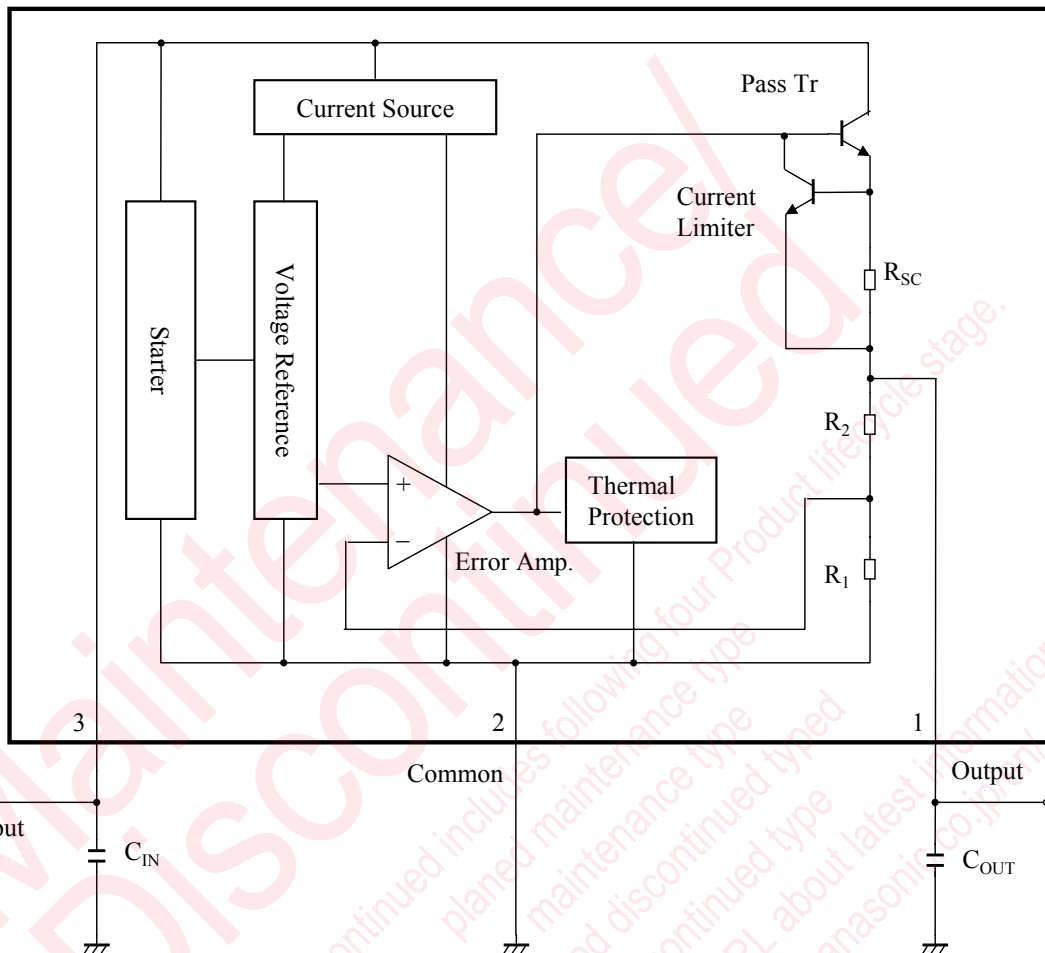

C_{IN} : 0.33 μ F
 C_{OUT} : 0.1 μ F
 R_1 : 4 k Ω
 R_2 : 2 k Ω

■ Pin Descriptions

| Pin No. | Pin name | Type | Description |
|---------|----------|--------|--|
| 1 | Output | Output | Regulated power output |
| 2 | Common | GND | Ground |
| 3 | Input | Input | Input supplies power to the internal circuitry |

Maintenance/Discontinued includes following four Product lifecycle stage.
planned maintenance type
maintenance type
planned discontinued type
discontinued type
Please visit following URL about latest information.
<http://www.semicon.panasonic.co.jp/en/>

■ Absolute Maximum Ratings

| A No. | Parameter | Symbol | Rating | Unit | Note |
|-------|-------------------------------|-----------|-------------|------|------|
| 1 | Input voltage | V_{IN} | 35 | V | *1 |
| 2 | Supply current | I_{CC} | 270 | mA | *2 |
| 3 | Power dissipation | P_D | 342 | mW | *3 |
| 4 | Operating ambient temperature | T_{opr} | -30 to +80 | °C | *4 |
| 5 | Storage temperature | T_{stg} | -55 to +150 | °C | *4 |

Note) *1: The values under the condition not exceeding the above absolute maximum ratings and the power dissipation.

*2: Since current limiting circuit is built in, current value never exceeds the limit.

*3: The power dissipation shown is the value at $T_a = 80^\circ\text{C}$.

When using this IC, refer to the $\bullet P_D - T_a$ diagram in the ■ Technical Data and use under the condition not exceeding the allowable value.
When T_j exceeds 150°C , the internal circuit cuts off the output.

*4: Except for the power dissipation, operating ambient temperature, and storage temperature, all ratings are for $T_a = 25^\circ\text{C}$.

■ Operating supply voltage range

| Parameter | Symbol | Range | Unit | Note |
|----------------------|----------|-----------|------|------|
| Supply voltage range | V_{CC} | 8.5 to 21 | V | — |

Note) The values under the condition not exceeding the above absolute maximum ratings and the power dissipation.

■ Electrical Characteristics

Note) Unless otherwise specified, $T_a = 25^\circ\text{C} \pm 2^\circ\text{C}$, $V_{\text{IN}} = 11\text{ V}$, $I_{\text{OUT}} = 40\text{ mA}$, $C_{\text{IN}} = 0.33\ \mu\text{F}$ and $C_{\text{OUT}} = 0.1\ \mu\text{F}$, $T_j = 0^\circ\text{C}$ to 125°C

| B No. | Parameter | Symbol | Conditions | Limits | | | Unit | Note |
|-------|-----------------------------------|------------------------------|--|--------|-----|------|------|------|
| | | | | Min | Typ | Max | | |
| 1 | Output voltage | V_{OUT} | $T_j = 25^\circ\text{C}$ | 5.76 | 6.0 | 6.24 | V | *1 |
| 2 | Output voltage tolerance | V_{OUT} | $V_{\text{IN}} = 8.5\text{ V to }21\text{ V}$, $I_{\text{OUT}} = 1\text{ mA to }70\text{ mA}$ | 5.7 | — | 6.3 | V | *1 |
| 3 | Line regulation | REG_{IN} | $V_{\text{IN}} = 8.5\text{ V to }21\text{ V}$, $T_j = 25^\circ\text{C}$ | — | 60 | 155 | mV | *1 |
| | | | $V_{\text{IN}} = 9\text{ V to }21\text{ V}$, $T_j = 25^\circ\text{C}$ | — | 50 | 105 | | |
| 4 | Load regulation | REG_{L} | $I_{\text{OUT}} = 1\text{ mA to }100\text{ mA}$, $T_j = 25^\circ\text{C}$ | — | 12 | 65 | mV | *1 |
| | | | $I_{\text{OUT}} = 1\text{ mA to }40\text{ mA}$, $T_j = 25^\circ\text{C}$ | — | 5.5 | 35 | | |
| 5 | Bias current | I_{Bias} | $T_j = 25^\circ\text{C}$ | — | 2.0 | 3.0 | mA | *1 |
| 6 | Bias current fluctuation to input | $\Delta I_{\text{Bias(IN)}}$ | $V_{\text{IN}} = 9\text{ V to }21\text{ V}$, $T_j = 25^\circ\text{C}$ | — | — | 1.0 | mA | *1 |
| 7 | Bias current fluctuation to load | $\Delta I_{\text{Bias(L)}}$ | $I_{\text{OUT}} = 1\text{ mA to }40\text{ mA}$, $T_j = 25^\circ\text{C}$ | — | — | 0.1 | mA | *1 |
| 8 | Ripple rejection ratio | RR | $V_{\text{IN}} = 9\text{ V to }19\text{ V}$, $I_{\text{OUT}} = 40\text{ mA}$, $f = 120\text{ Hz}$ | 46 | 56 | — | dB | — |

Note) *1: The specified condition $T_j = 25^\circ\text{C}$ means that the test should be carried out within so short a test time (within 10ms) that the characteristic value drift due to the chip junction temperature rise can be ignored.

■ Electrical Characteristics (Reference values for design)

Note) Unless otherwise specified, $T_a = 25^\circ\text{C} \pm 2^\circ\text{C}$, $V_{\text{IN}} = 11\text{ V}$, $I_{\text{OUT}} = 40\text{ mA}$, $C_{\text{IN}} = 0.33\ \mu\text{F}$ and $C_{\text{OUT}} = 0.1\ \mu\text{F}$, $T_j = 0^\circ\text{C}$ to 125°C


The characteristics listed below are reference values for design of the IC and are not guaranteed by inspection.

If a problem does occur related to these characteristics, Panasonic will respond in good faith to user concerns.

| B No. | Parameter | Symbol | Conditions | Reference values | | | Unit | Note |
|-------|---|-------------------------------------|--|------------------|------|-----|----------------------------|------|
| | | | | Min | Typ | Max | | |
| 1 | Output noise voltage | V_{no} | $f = 10\text{ Hz to }100\text{ kHz}$ | — | 50 | — | μV | — |
| 2 | Minimum input/output voltage difference | $V_{\text{DIF(min)}}$ | $T_j = 25^\circ\text{C}$ | — | 1.7 | — | V | *1 |
| 3 | Output short-circuit current | $I_{\text{O(Short)}}$ | $T_j = 25^\circ\text{C}$ | — | 140 | — | mA | *1 |
| 4 | Output voltage temperature coefficient | $\frac{\Delta V_{\text{OUT}}}{T_a}$ | $I_{\text{OUT}} = 5\text{ mA}$, $T_j = 0^\circ\text{C}$ to 125°C | — | -0.7 | — | $\text{mV}/^\circ\text{C}$ | — |

Note) *1: The specified condition $T_j = 25^\circ\text{C}$ means that the test should be carried out within so short a test time (within 10ms) that the characteristic value drift due to the chip junction temperature rise can be ignored.

- Technical Data
- $P_D - T_a$ diagram

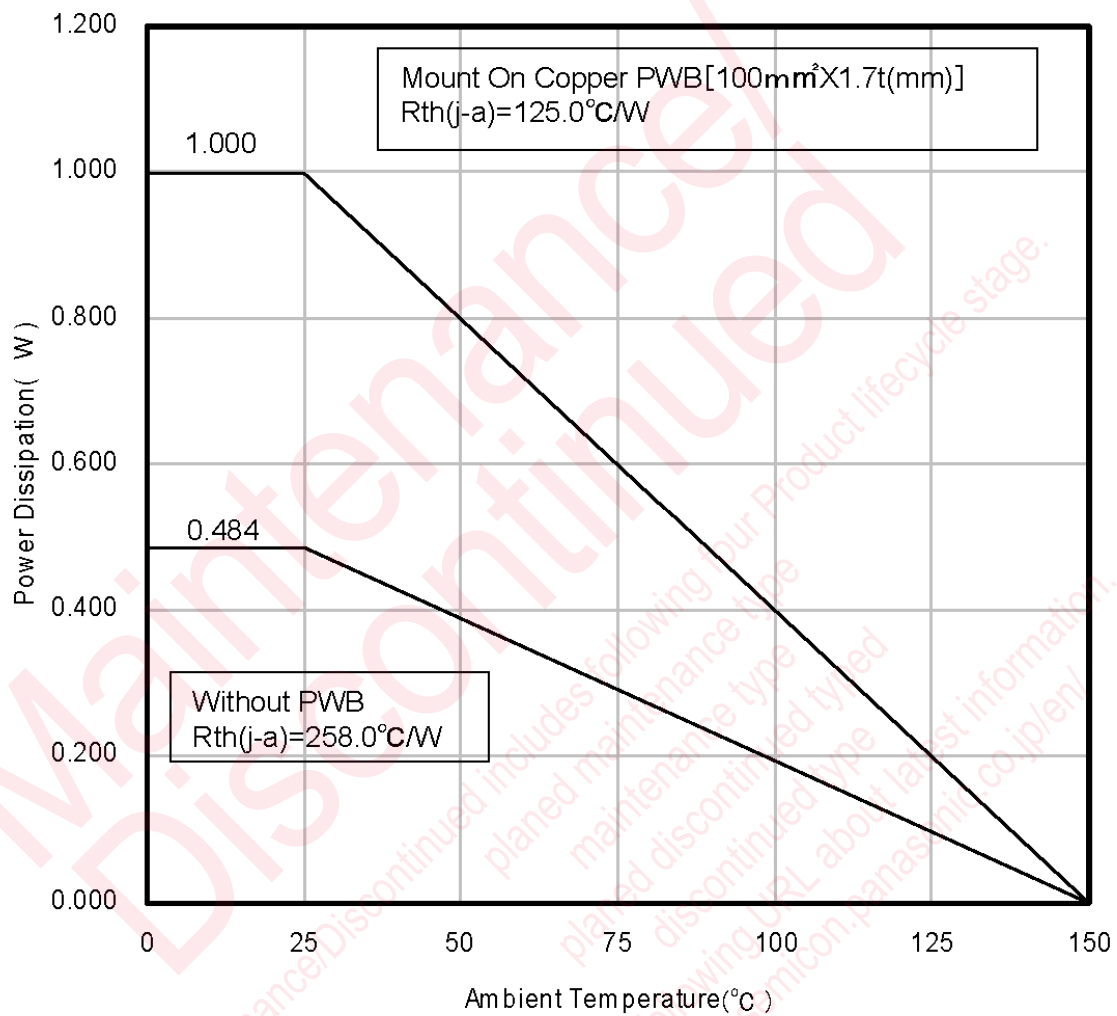

Restrictions in using the technical information and applications described in this book

This book is to be exported or provided to non-residents, the laws and regulations related to security export control, must be observed.

This book shows the main characteristics and application circuit examples of the products. It does not constitute a warranty of any property right or other right owned by Panasonic Corporation or any other company as to the infringement upon any such right owned by any other company. The information described in this book is for reference only.

This book describes standard applications or general electronic equipment (such as office equipment and household appliances).

Special applications:

Automobiles, traffic control equipment, combustion equipment, life support equipment, etc. where high reliability are required, or if the failure or malfunction of the product may cause serious damage to life or property.

Products are subject to change without notice for modification and/or improvement of the products, therefore, ask for the most up-to-date Product Information for details to satisfy your requirements.

Products are subject to change without notice for modification and/or improvement of the products, therefore, ask for the most up-to-date Product Information for details to satisfy your requirements. Please pay attention to the absolute maximum rating and the guaranteed operating conditions (such as temperature range, humidity, etc.). Especially, please be careful not to exceed the range of absolute maximum rating for turn-on and mode-switching. Otherwise, we will not be liable for any damage to the products.



Please take into the consideration of incidence of break down and failure in the systems such as redundant design, arresting the spread of fire, etc. to prevent personal injury, fire, social damages, for example, by using the products.

Product performance and characteristics change due to external factors (ESD, EOS, etc.) during mounting or at customer's process. When using products for which reliability is required, please pay attention to the shelf life and the elapsed time since first opening the packages.

Reproduction or distribution, partially, without the prior written permission of our company.

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View AN78L06ME1 on WIN SOURCE](#)
-  [Panasonic Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management