



# THE DATASHEET OF LM120H-15/NOPB

## LM120/LM320-N Series 3-Terminal Negative Regulators

Check for Samples: [LM120](#), [LM320-N](#)

### FEATURES

- Preset Output Voltage Error Less than  $\pm 3\%$
- Preset Current Limit
- Internal Thermal Shutdown
- Operates with Input-Output Voltage Differential down to 1V
- Excellent Ripple Rejection
- Low Temperature Drift
- Easily Adjustable to Higher Output Voltage

### DESCRIPTION

The LM120 series are three-terminal negative regulators with a fixed output voltage of  $-5\text{V}$ ,  $-12\text{V}$ , and  $-15\text{V}$ , and up to 1.5A load current capability. Where other voltages are required, the LM137 and LM137HV series provide an output voltage range of  $-1.2\text{V}$  to  $-47\text{V}$ .

The LM120 need only one external component—a compensation capacitor at the output, making them easy to apply. Worst case specifications on output voltage deviation due to any combination of line, load or temperature variation assure satisfactory system operation.

### Typical Applications

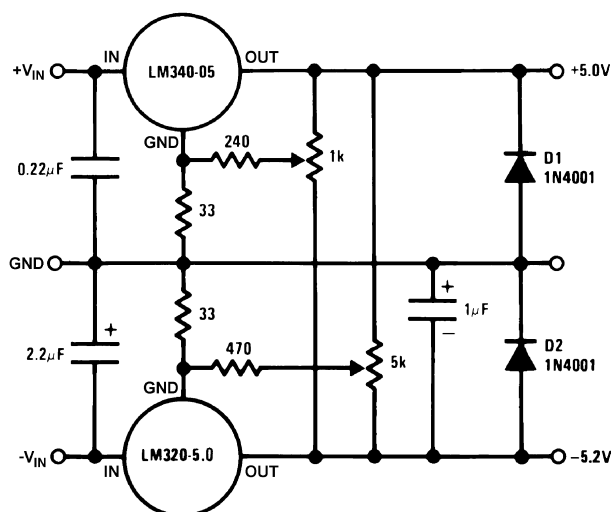



Figure 1. Dual Trimmed Supply

Exceptional effort has been made to make the LM120 Series immune to overload conditions. The regulators have current limiting which is independent of temperature, combined with thermal overload protection. Internal current limiting protects against momentary faults while thermal shutdown prevents junction temperatures from exceeding safe limits during prolonged overloads.

Although primarily intended for fixed output voltage applications, the LM120 Series may be programmed for higher output voltages with a simple resistive divider. The low quiescent drain current of the devices allows this technique to be used with good regulation.

Table 1. LM120 Series Packages and Power Capability

| Device        | Package      | Rated Power Dissipation | Design Load Current |
|---------------|--------------|-------------------------|---------------------|
| LM120/LM320-N | TO-3 (NDS)   | 20W                     | 1.5A                |
|               | TO (NDT)     | 2W                      | 0.5A                |
| LM320-N       | TO-220 (NDE) | 15W                     | 1.5A                |

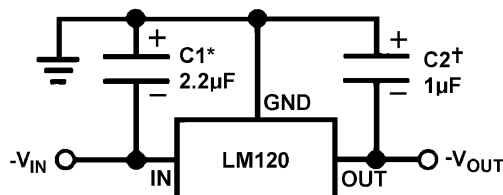

\*Required if regulator is separated from filter capacitor by more than 3 inches. For value given, capacitor must be solid tantalum. 25  $\mu\text{F}$  aluminum electrolytic may be substituted.

†Required for stability. For value given, capacitor must be solid tantalum. 25  $\mu\text{F}$  aluminum electrolytic may be substituted. Values given may be increased without limit.

For output capacitance in excess of 100  $\mu\text{F}$ , a high current diode from input to output (1N4001, etc.) will protect the regulator from momentary input shorts.

Figure 2. Fixed Regulator



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

All trademarks are the property of their respective owners.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of the Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

Copyright © 1998–2013, Texas Instruments Incorporated



These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

## ABSOLUTE MAXIMUM RATINGS–5 VOLT REGULATORS<sup>(1)(2)(3)</sup>

|                                   |                    |
|-----------------------------------|--------------------|
| Power Dissipation                 | Internally Limited |
| Input Voltage                     | –25V               |
| Input-Output Voltage Differential | 25V                |
| Junction Temperatures             | <sup>(4)</sup>     |
| Storage Temperature Range         | –65°C to +150°C    |
| Lead Temperature                  |                    |
| (Soldering, 10 sec.)              | 300°C              |
| Plastic                           | 260°C              |

(1) Refer to RETS120-5H drawing for LM120H-5.0 or RETS120-5K drawing for LM120-5K military specifications.

(2) For –5V 3 amp regulators, see LM145 data sheet.

(3) If Military/Aerospace specified devices are required, please contact the Texas Instruments Sales Office/Distributors for availability and specifications.

(4) This specification applies over  $-55^{\circ}\text{C} \leq T_J \leq +150^{\circ}\text{C}$  for the LM120 and  $0^{\circ}\text{C} \leq T_J \leq +125^{\circ}\text{C}$  for the LM320-N.

## LM120K-5.0 AND LM320K-5.0 ELECTRICAL CHARACTERISTICS<sup>(1)</sup>

| Order Numbers                                                                   |                                                                                                                             | Metal Can Package    |            |            |                      |            |            | Units    |
|---------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------|----------------------|------------|------------|----------------------|------------|------------|----------|
|                                                                                 |                                                                                                                             | LM120K-5.0<br>(TO-3) |            |            | LM320K-5.0<br>(TO-3) |            |            |          |
| Design Output Current (I <sub>D</sub> )<br>Device Dissipation (P <sub>D</sub> ) |                                                                                                                             | 1.5A<br>20W          |            |            |                      |            |            |          |
| Parameter                                                                       | Conditions <sup>(2)</sup>                                                                                                   | Min                  | Typ        | Max        | Min                  | Typ        | Max        |          |
| Output Voltage                                                                  | T <sub>J</sub> = 25°C, V <sub>IN</sub> =10V,<br>I <sub>LOAD</sub> = 5 mA                                                    | –5.1                 | –5         | –4.9       | –5.2                 | –5         | –4.8       | V        |
| Line Regulation                                                                 | T <sub>J</sub> = 25°C, I <sub>LOAD</sub> = 5 mA,<br>V <sub>MIN</sub> ≤ V <sub>IN</sub> ≤ V <sub>MAX</sub>                   |                      | 10         | 25         |                      | 10         | 40         | mV       |
| Input Voltage                                                                   |                                                                                                                             | –25                  |            | –7         | –25                  |            | –7         | V        |
| Ripple Rejection                                                                | f = 120 Hz                                                                                                                  | 54                   | 64         |            | 54                   | 64         |            | dB       |
| Load Regulation,<br>(3)                                                         | T <sub>J</sub> = 25°C, V <sub>IN</sub> = 10V,<br>5 mA ≤ I <sub>LOAD</sub> ≤ I <sub>D</sub>                                  |                      | 50         | 75         |                      | 60         | 100        | mV       |
| Output Voltage,<br>(2)                                                          | –7.5V ≤ V <sub>IN</sub> ≤ V <sub>MAX</sub> ,<br>5 mA ≤ I <sub>LOAD</sub> ≤ I <sub>D</sub> , P ≤ P <sub>D</sub>              | –5.20                |            | –4.80      | –5.25                |            | –4.75      | V        |
| Quiescent Current                                                               | V <sub>MIN</sub> ≤ V <sub>IN</sub> ≤ V <sub>MAX</sub>                                                                       |                      | 1          | 2          |                      | 1          | 2          | mA       |
| Quiescent Current<br>Change                                                     | T <sub>J</sub> = 25°C<br>V <sub>MIN</sub> ≤ V <sub>IN</sub> ≤ V <sub>MAX</sub><br>5 mA ≤ I <sub>LOAD</sub> ≤ I <sub>D</sub> |                      | 0.1<br>0.1 | 0.4<br>0.4 |                      | 0.1<br>0.1 | 0.4<br>0.4 | mA<br>mA |
| Output Noise Voltage                                                            | T <sub>A</sub> = 25°C, C <sub>L</sub> = 1 μF, I <sub>L</sub> = 5 mA,<br>V <sub>IN</sub> = 10V, 10 Hz ≤ f ≤ 100 kHz          |                      | 150        |            |                      | 150        |            | μV       |
| Long Term Stability                                                             |                                                                                                                             |                      | 5          | 50         |                      | 5          | 50         | mV       |
| Thermal Resistance                                                              |                                                                                                                             |                      |            |            |                      |            |            |          |
| Junction to Case                                                                |                                                                                                                             |                      |            | 3          |                      |            | 3          | °C/W     |
| Junction to Ambient                                                             |                                                                                                                             |                      |            | 35         |                      |            | 35         | °C/W     |

(1) For –5V 3 amp regulators, see LM145 data sheet.

(2) This specification applies over  $-55^{\circ}\text{C} \leq T_J \leq +150^{\circ}\text{C}$  for the LM120 and  $0^{\circ}\text{C} \leq T_J \leq +125^{\circ}\text{C}$  for the LM320-N.

(3) Regulation is measured at constant junction temperature. Changes in output voltage due to heating effects must be taken into account separately. To ensure constant junction temperature, low duty cycle, pulse testing is used. The LM120/LM320-N series does have low thermal feedback, improving line and load regulation. On all other tests, even though power dissipation is internally limited, electrical specifications apply only up to  $P_D$ .

**LM120H-5.0 ELECTRICAL CHARACTERISTICS<sup>(1)</sup>**

| Order Numbers                                                                   |                                                                                                                             | Metal Can Package  |      |       | Units |
|---------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------|--------------------|------|-------|-------|
|                                                                                 |                                                                                                                             | LM120H-5.0<br>(TO) |      |       |       |
| Design Output Current (I <sub>D</sub> )<br>Device Dissipation (P <sub>D</sub> ) |                                                                                                                             | 0.5A<br>2W         |      |       |       |
| Parameter                                                                       | Conditions <sup>(2)</sup>                                                                                                   | Min                | Typ  | Max   |       |
| Output Voltage                                                                  | T <sub>J</sub> = 25°C, V <sub>IN</sub> =10V,<br>I <sub>LOAD</sub> = 5 mA                                                    | -5.1               | -5   | -4.9  | V     |
| Line Regulation                                                                 | T <sub>J</sub> = 25°C, I <sub>LOAD</sub> = 5 mA,<br>V <sub>MIN</sub> ≤ V <sub>IN</sub> ≤ V <sub>MAX</sub>                   |                    | 10   | 25    | mV    |
| Input Voltage                                                                   |                                                                                                                             | -25                |      | -7    | V     |
| Ripple Rejection                                                                | f = 120 Hz                                                                                                                  | 54                 | 64   |       | dB    |
| Load Regulation,<br>(3)                                                         | T <sub>J</sub> = 25°C, V <sub>IN</sub> = 10V,<br>5 mA ≤ I <sub>LOAD</sub> ≤ I <sub>D</sub>                                  |                    | 30   | 50    | mV    |
| Output Voltage,<br>(4)                                                          | -7.5V ≤ V <sub>IN</sub> ≤ V <sub>MAX</sub> ,<br>5 mA ≤ I <sub>LOAD</sub> ≤ I <sub>D</sub> , P ≤ P <sub>D</sub>              | -5.20              |      | -4.80 | V     |
| Quiescent Current                                                               | V <sub>MIN</sub> ≤ V <sub>IN</sub> ≤ V <sub>MAX</sub>                                                                       |                    | 1    | 2     | mA    |
| Quiescent Current<br>Change                                                     | T <sub>J</sub> = 25°C<br>V <sub>MIN</sub> ≤ V <sub>IN</sub> ≤ V <sub>MAX</sub><br>5 mA ≤ I <sub>LOAD</sub> ≤ I <sub>D</sub> |                    | 0.05 | 0.4   | mA    |
|                                                                                 |                                                                                                                             |                    | 0.04 | 0.4   | mA    |
| Output Noise Voltage                                                            | T <sub>A</sub> = 25°C, C <sub>L</sub> = 1 μF, I <sub>L</sub> = 5 mA,<br>V <sub>IN</sub> = 10V, 10 Hz ≤ f ≤ 100 kHz          |                    | 150  |       | μV    |
| Long Term Stability                                                             |                                                                                                                             |                    | 5    |       | mV    |
| Thermal Resistance<br>Junction to Case<br>Junction to Ambient                   |                                                                                                                             |                    |      | (5)   | °C/W  |
|                                                                                 |                                                                                                                             |                    |      | (5)   | °C/W  |

(1) For -5V 3 amp regulators, see LM145 data sheet.

(2) This specification applies over  $-55^\circ\text{C} \leq T_J \leq +150^\circ\text{C}$  for the LM120 and  $0^\circ\text{C} \leq T_J \leq +125^\circ\text{C}$  for the LM320-N.

(3) Regulation is measured at constant junction temperature. Changes in output voltage due to heating effects must be taken into account separately. To ensure constant junction temperature, low duty cycle, pulse testing is used. The LM120/LM320-N series does have low thermal feedback, improving line and load regulation. On all other tests, even though power dissipation is internally limited, electrical specifications apply only up to  $P_D$ .

(4) This specification applies over  $-55^\circ\text{C} \leq T_J \leq +150^\circ\text{C}$  for the LM120 and  $0^\circ\text{C} \leq T_J \leq +125^\circ\text{C}$  for the LM320-N.

(5) Thermal resistance of typically  $85^\circ\text{C/W}$  (in 400 linear feet air flow),  $224^\circ\text{C/W}$  (in static air) junction to ambient, of typically  $21^\circ\text{C/W}$  junction to case.

**ABSOLUTE MAXIMUM RATINGS–12 VOLT REGULATORS<sup>(1)(2)</sup>**

|                                   |                                             |
|-----------------------------------|---------------------------------------------|
| Power Dissipation                 | Internally Limited                          |
| Input Voltage                     | -35V                                        |
| Input-Output Voltage Differential | 30V                                         |
| Junction Temperatures             | (3)                                         |
| Storage Temperature Range         | $-65^\circ\text{C}$ to $+150^\circ\text{C}$ |
| Lead Temperature                  |                                             |
| (Soldering, 10 sec.)              | 300°C                                       |

(1) Refer to RETS120H-12 drawing for LM120H-12 or RETS120-12K drawing for LM120K-12 military specifications.

(2) If Military/Aerospace specified devices are required, please contact the Texas Instruments Sales Office/Distributors for availability and specifications.

(3) This specification applies over  $-55^\circ\text{C} \leq T_J \leq +150^\circ\text{C}$  for the LM120 and  $0^\circ\text{C} \leq T_J \leq +125^\circ\text{C}$  for the LM320-N.

**LM120K-12 ELECTRICAL CHARACTERISTICS**

| Order Numbers                           |                                                                                                                             | Metal Can Package   |            |            | Units    |
|-----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------|---------------------|------------|------------|----------|
|                                         |                                                                                                                             | LM120K-12<br>(TO-3) |            |            |          |
| Design Output Current (I <sub>D</sub> ) |                                                                                                                             | 1A                  |            |            |          |
| Device Dissipation (P <sub>D</sub> )    |                                                                                                                             | 20W                 |            |            |          |
| Parameter                               | Conditions <sup>(1)</sup>                                                                                                   | Min                 | Typ        | Max        |          |
| Output Voltage                          | T <sub>J</sub> = 25°C, V <sub>IN</sub> = 17V,<br>I <sub>LOAD</sub> = 5 mA                                                   | -12.3               | -12        | -11.7      | V        |
| Line Regulation                         | T <sub>J</sub> = 25°C, I <sub>LOAD</sub> = 5 mA,<br>V <sub>MIN</sub> ≤ V <sub>IN</sub> ≤ V <sub>MAX</sub>                   |                     | 4          | 10         | mV       |
| Input Voltage                           |                                                                                                                             | -32                 |            | -14        | V        |
| Ripple Rejection                        | f = 120 Hz                                                                                                                  | 56                  | 80         |            | dB       |
| Load Regulation,<br>(2)                 | T <sub>J</sub> = 25°C, V <sub>IN</sub> = 17V,<br>5 mA ≤ I <sub>LOAD</sub> ≤ I <sub>D</sub>                                  |                     | 30         | 80         | mV       |
| Output Voltage,<br>(3)                  | 14.5V ≤ V <sub>IN</sub> ≤ V <sub>MAX</sub> ,<br>5 mA ≤ I <sub>LOAD</sub> ≤ I <sub>D</sub> , P ≤ P <sub>D</sub>              | -12.5               |            | -11.5      | V        |
| Quiescent Current                       | V <sub>MIN</sub> ≤ V <sub>IN</sub> ≤ V <sub>MAX</sub>                                                                       |                     | 2          | 4          | mA       |
| Quiescent Current<br>Change             | T <sub>J</sub> = 25°C<br>V <sub>MIN</sub> ≤ V <sub>IN</sub> ≤ V <sub>MAX</sub><br>5 mA ≤ I <sub>LOAD</sub> ≤ I <sub>D</sub> |                     | 0.1<br>0.1 | 0.4<br>0.4 | mA<br>mA |
| Output Noise Voltage                    | T <sub>A</sub> = 25°C, C <sub>L</sub> = 1 μF, I <sub>L</sub> = 5 mA,<br>V <sub>IN</sub> = 17V, 10 Hz ≤ f ≤ 100 kHz          |                     | 400        |            | μV       |
| Long Term Stability                     |                                                                                                                             |                     | 12         | 120        | mV       |
| Thermal Resistance                      |                                                                                                                             |                     |            |            |          |
| Junction to Case                        |                                                                                                                             |                     |            | 3          | °C/W     |
| Junction to Ambient                     |                                                                                                                             |                     |            | 35         | °C/W     |

(1) This specification applies over  $-55^\circ\text{C} \leq T_J \leq +150^\circ\text{C}$  for the LM120 and  $0^\circ\text{C} \leq T_J \leq +125^\circ\text{C}$  for the LM320-N.

(2) Regulation is measured at constant junction temperature. Changes in output voltage due to heating effects must be taken into account separately. To ensure constant junction temperature, low duty cycle, pulse testing is used. The LM120/LM320-N series does have low thermal feedback, improving line and load regulation. On all other tests, even though power dissipation is internally limited, electrical specifications apply only up to  $P_D$ .

(3) This specification applies over  $-55^\circ\text{C} \leq T_J \leq +150^\circ\text{C}$  for the LM120 and  $0^\circ\text{C} \leq T_J \leq +125^\circ\text{C}$  for the LM320-N.

**LM120H-12 ELECTRICAL CHARACTERISTICS**

| Order Numbers                           |                                                                                                           | Metal Can Package |     |       | Units |
|-----------------------------------------|-----------------------------------------------------------------------------------------------------------|-------------------|-----|-------|-------|
|                                         |                                                                                                           | LM120H-12<br>(TO) |     |       |       |
| Design Output Current (I <sub>O</sub> ) |                                                                                                           | 0.2A              |     |       |       |
| Device Dissipation (P <sub>D</sub> )    |                                                                                                           | 2W                |     |       |       |
| Parameter                               | Conditions <sup>(1)</sup>                                                                                 | Min               | Typ | Max   |       |
| Output Voltage                          | T <sub>J</sub> = 25°C, V <sub>IN</sub> = 17V,<br>I <sub>LOAD</sub> = 5 mA                                 | -12.3             | -12 | -11.7 | V     |
| Line Regulation                         | T <sub>J</sub> = 25°C, I <sub>LOAD</sub> = 5 mA,<br>V <sub>MIN</sub> ≤ V <sub>IN</sub> ≤ V <sub>MAX</sub> |                   | 4   | 10    | mV    |
| Input Voltage                           |                                                                                                           | -32               |     | -14   | V     |
| Ripple Rejection                        | f = 120 Hz                                                                                                | 56                | 80  |       | dB    |
| Load Regulation,                        | T <sub>J</sub> = 25°C, V <sub>IN</sub> = 17V,                                                             |                   | 10  | 25    | mV    |

(1) This specification applies over  $-55^\circ\text{C} \leq T_J \leq +150^\circ\text{C}$  for the LM120 and  $0^\circ\text{C} \leq T_J \leq +125^\circ\text{C}$  for the LM320-N.

**LM120H-12 ELECTRICAL CHARACTERISTICS (continued)**

| Order Numbers                           |                                                                                                                             | Metal Can Package |              |            | Units    |
|-----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------|-------------------|--------------|------------|----------|
|                                         |                                                                                                                             | LM120H-12<br>(TO) |              |            |          |
| Design Output Current (I <sub>D</sub> ) |                                                                                                                             | 0.2A              |              |            |          |
| Device Dissipation (P <sub>D</sub> )    |                                                                                                                             | 2W                |              |            |          |
| Parameter                               | Conditions <sup>(1)</sup>                                                                                                   | Min               | Typ          | Max        |          |
| (2)                                     | 5 mA ≤ I <sub>LOAD</sub> ≤ I <sub>D</sub>                                                                                   |                   |              |            |          |
| Output Voltage,<br>(1)                  | 14.5V ≤ V <sub>IN</sub> ≤ V <sub>MAX</sub> ,<br>5 mA ≤ I <sub>LOAD</sub> ≤ I <sub>D</sub> , P ≤ P <sub>D</sub>              | -12.5             |              | -11.5      | V        |
| Quiescent Current                       | V <sub>MIN</sub> ≤ V <sub>IN</sub> ≤ V <sub>MAX</sub>                                                                       |                   | 2            | 4          | mA       |
| Quiescent Current<br>Change             | T <sub>J</sub> = 25°C<br>V <sub>MIN</sub> ≤ V <sub>IN</sub> ≤ V <sub>MAX</sub><br>5 mA ≤ I <sub>LOAD</sub> ≤ I <sub>D</sub> |                   | 0.05<br>0.03 | 0.4<br>0.4 | mA<br>mA |
| Output Noise Voltage                    | T <sub>A</sub> = 25°C, C <sub>L</sub> = 1 μF, I <sub>L</sub> = 5 mA,<br>V <sub>IN</sub> = 17V, 10 Hz ≤ f ≤ 100 kHz          |                   | 400          |            | μV       |
| Long Term Stability                     |                                                                                                                             |                   | 12           | 120        | mV       |
| Thermal Resistance<br>Junction to Case  |                                                                                                                             |                   |              | (3)        | °C/W     |
| Junction to Ambient                     |                                                                                                                             |                   |              | (3)        | °C/W     |

- (2) Regulation is measured at constant junction temperature. Changes in output voltage due to heating effects must be taken into account separately. To ensure constant junction temperature, low duty cycle, pulse testing is used. The LM120/LM320-N series does have low thermal feedback, improving line and load regulation. On all other tests, even though power dissipation is internally limited, electrical specifications apply only up to  $P_D$ .
- (3) Thermal resistance of typically  $85^\circ\text{C/W}$  (in 400 linear feet/min air flow),  $224^\circ\text{C/W}$  (in static air) junction to ambient, of typically  $21^\circ\text{C/W}$  junction to case.

**LM320T-12 ELECTRICAL CHARACTERISTICS**

| Order Numbers                           |                                                                                                                             | Power Plastic Package |            |            | Units    |
|-----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------|-----------------------|------------|------------|----------|
|                                         |                                                                                                                             | LM320T-12<br>(TO-220) |            |            |          |
| Design Output Current (I <sub>D</sub> ) |                                                                                                                             | 1A                    |            |            |          |
| Device Dissipation (P <sub>D</sub> )    |                                                                                                                             | 15W                   |            |            |          |
| Parameter                               | Conditions <sup>(1)</sup>                                                                                                   | Min                   | Typ        | Max        |          |
| Output Voltage                          | T <sub>J</sub> = 25°C, V <sub>IN</sub> = 17V,<br>I <sub>LOAD</sub> = 5 mA                                                   | -12.4                 | -12        | -11.6      | V        |
| Line Regulation                         | T <sub>J</sub> = 25°C, I <sub>LOAD</sub> = 5 mA,<br>V <sub>MIN</sub> ≤ V <sub>IN</sub> ≤ V <sub>MAX</sub>                   |                       | 4          | 20         | mV       |
| Input Voltage                           |                                                                                                                             | -32                   |            | -14.5      | V        |
| Ripple Rejection                        | f = 120 Hz                                                                                                                  | 56                    | 80         |            | dB       |
| Load Regulation,<br>(2)                 | T <sub>J</sub> = 25°C, V <sub>IN</sub> = 17V,<br>5 mA ≤ I <sub>LOAD</sub> ≤ I <sub>D</sub>                                  |                       | 30         | 80         | mV       |
| Output Voltage,<br>(1)                  | 14.5V ≤ V <sub>IN</sub> ≤ V <sub>MAX</sub> ,<br>5 mA ≤ I <sub>LOAD</sub> ≤ I <sub>D</sub> , P ≤ P <sub>D</sub>              | -12.6                 |            | -11.4      | V        |
| Quiescent Current                       | V <sub>MIN</sub> ≤ V <sub>IN</sub> ≤ V <sub>MAX</sub>                                                                       |                       | 2          | 4          | mA       |
| Quiescent Current<br>Change             | T <sub>J</sub> = 25°C<br>V <sub>MIN</sub> ≤ V <sub>IN</sub> ≤ V <sub>MAX</sub><br>5 mA ≤ I <sub>LOAD</sub> ≤ I <sub>D</sub> |                       | 0.1<br>0.1 | 0.4<br>0.4 | mA<br>mA |

- (1) This specification applies over  $-55^\circ\text{C} \leq T_J \leq +150^\circ\text{C}$  for the LM120 and  $0^\circ\text{C} \leq T_J \leq +125^\circ\text{C}$  for the LM320-N.
- (2) Regulation is measured at constant junction temperature. Changes in output voltage due to heating effects must be taken into account separately. To ensure constant junction temperature, low duty cycle, pulse testing is used. The LM120/LM320-N series does have low thermal feedback, improving line and load regulation. On all other tests, even though power dissipation is internally limited, electrical specifications apply only up to  $P_D$ .

**LM320T-12 ELECTRICAL CHARACTERISTICS (continued)**

| Order Numbers                           |                                                                                                                    | Power Plastic Package |     |     | Units |
|-----------------------------------------|--------------------------------------------------------------------------------------------------------------------|-----------------------|-----|-----|-------|
|                                         |                                                                                                                    | LM320T-12<br>(TO-220) |     |     |       |
| Design Output Current (I <sub>D</sub> ) |                                                                                                                    | 1A                    |     |     |       |
| Device Dissipation (P <sub>D</sub> )    |                                                                                                                    | 15W                   |     |     |       |
| Parameter                               | Conditions <sup>(1)</sup>                                                                                          | Min                   | Typ | Max |       |
| Output Noise Voltage                    | T <sub>A</sub> = 25°C, C <sub>L</sub> = 1 μF, I <sub>L</sub> = 5 mA,<br>V <sub>IN</sub> = 17V, 10 Hz ≤ f ≤ 100 kHz |                       | 400 |     | μV    |
| Long Term Stability                     |                                                                                                                    |                       | 24  |     | mV    |
| Thermal Resistance<br>Junction to Case  |                                                                                                                    |                       | 4   |     | °C/W  |
| Junction to Ambient                     |                                                                                                                    |                       | 50  |     | °C/W  |

**ABSOLUTE MAXIMUM RATINGS–15 VOLT REGULATORS <sup>(1)(2)</sup>**

|                                          |                                               |
|------------------------------------------|-----------------------------------------------|
| Power Dissipation                        | Internally Limited                            |
| Input Voltage                            |                                               |
| LM120/LM320-N                            | –40V                                          |
| LM320T                                   | –35V                                          |
| Input-Output Voltage Differential        | 30V                                           |
| Junction Temperatures                    | <sup>(3)</sup>                                |
| Storage Temperature Range                | –65 $^\circ\text{C}$ to +150 $^\circ\text{C}$ |
| Lead Temperature<br>(Soldering, 10 sec.) | 300 $^\circ\text{C}$                          |

(1) Refer to RETS120-15H drawing for LM120H-15 or RETS120-15K drawing for LM120K-15 military specifications.

(2) If Military/Aerospace specified devices are required, please contact the Texas Instruments Sales Office/Distributors for availability and specifications.

(3) This specification applies over  $-55^\circ\text{C} \leq T_J \leq +150^\circ\text{C}$  for the LM120 and  $0^\circ\text{C} \leq T_J \leq +125^\circ\text{C}$  for the LM320-N.

**LM120K-15 AND LM320K-15 ELECTRICAL CHARACTERISTICS**

| Order Numbers                           |                                                                                                                | Metal Can Package   |     |       |                     |     |       | Units |
|-----------------------------------------|----------------------------------------------------------------------------------------------------------------|---------------------|-----|-------|---------------------|-----|-------|-------|
|                                         |                                                                                                                | LM120K-15<br>(TO-3) |     |       | LM320K-15<br>(TO-3) |     |       |       |
| Design Output Current (I <sub>D</sub> ) |                                                                                                                | 1A                  |     |       |                     |     |       |       |
| Device Dissipation (P <sub>D</sub> )    |                                                                                                                | 20W                 |     |       |                     |     |       |       |
| Parameter                               | Conditions <sup>(1)</sup>                                                                                      | Min                 | Typ | Max   | Min                 | Typ | Max   |       |
| Output Voltage                          | T <sub>J</sub> = 25°C, V <sub>IN</sub> = 20V,<br>I <sub>LOAD</sub> = 5 mA                                      | –15.3               | –15 | –14.7 | –15.4               | –15 | –14.6 | V     |
| Line Regulation                         | T <sub>J</sub> = 25°C, I <sub>LOAD</sub> = 5 mA,<br>V <sub>MIN</sub> ≤ V <sub>IN</sub> ≤ V <sub>MAX</sub>      |                     | 5   | 10    |                     | 5   | 20    | mV    |
| Input Voltage                           |                                                                                                                | –35                 |     | –17   | –35                 |     | –17   | V     |
| Ripple Rejection                        | f = 120 Hz                                                                                                     | 56                  | 80  |       | 56                  | 80  |       | dB    |
| Load Regulation,<br>(2)                 | T <sub>J</sub> = 25°C, V <sub>IN</sub> = 20V,<br>5 mA ≤ I <sub>LOAD</sub> ≤ I <sub>D</sub>                     |                     | 30  | 80    |                     | 30  | 80    | mV    |
| Output Voltage,<br>(1)                  | 17.5V ≤ V <sub>IN</sub> ≤ V <sub>MAX</sub> ,<br>5 mA ≤ I <sub>LOAD</sub> ≤ I <sub>D</sub> , P ≤ P <sub>D</sub> | –15.5               |     | –14.5 | –15.6               |     | –14.4 | V     |
| Quiescent Current                       | V <sub>MIN</sub> ≤ V <sub>IN</sub> ≤ V <sub>MAX</sub>                                                          |                     | 2   | 4     |                     | 2   | 4     | mA    |

(1) This specification applies over  $-55^\circ\text{C} \leq T_J \leq +150^\circ\text{C}$  for the LM120 and  $0^\circ\text{C} \leq T_J \leq +125^\circ\text{C}$  for the LM320-N.

(2) Regulation is measured at constant junction temperature. Changes in output voltage due to heating effects must be taken into account separately. To ensure constant junction temperature, low duty cycle, pulse testing is used. The LM120/LM320-N series does have low thermal feedback, improving line and load regulation. On all other tests, even though power dissipation is internally limited, electrical specifications apply only up to  $P_D$ .

**LM120K-15 AND LM320K-15 ELECTRICAL CHARACTERISTICS (continued)**

| Order Numbers                           |                                                                                                                    | Metal Can Package   |     |     |                     |     |     | Units |
|-----------------------------------------|--------------------------------------------------------------------------------------------------------------------|---------------------|-----|-----|---------------------|-----|-----|-------|
|                                         |                                                                                                                    | LM120K-15<br>(TO-3) |     |     | LM320K-15<br>(TO-3) |     |     |       |
| Design Output Current (I <sub>D</sub> ) |                                                                                                                    | 1A                  |     |     |                     |     |     |       |
| Device Dissipation (P <sub>D</sub> )    |                                                                                                                    | 20W                 |     |     |                     |     |     |       |
| Parameter                               | Conditions <sup>(1)</sup>                                                                                          | Min                 | Typ | Max | Min                 | Typ | Max |       |
| Quiescent Current<br>Change             | T <sub>J</sub> = 25°C                                                                                              |                     |     |     |                     |     |     |       |
|                                         | V <sub>MIN</sub> ≤ V <sub>IN</sub> ≤ V <sub>MAX</sub>                                                              |                     | 0.1 | 0.4 |                     | 0.1 | 0.4 | mA    |
|                                         | 5 mA ≤ I <sub>LOAD</sub> ≤ I <sub>D</sub>                                                                          |                     | 0.1 | 0.4 |                     | 0.1 | 0.4 | mA    |
| Output Noise Voltage                    | T <sub>A</sub> = 25°C, C <sub>L</sub> = 1 μF, I <sub>L</sub> = 5 mA,<br>V <sub>IN</sub> = 20V, 10 Hz ≤ f ≤ 100 kHz |                     | 400 |     |                     | 400 |     | μV    |
| Long Term Stability                     |                                                                                                                    |                     | 15  | 150 |                     | 15  | 150 | mV    |
| Thermal Resistance                      |                                                                                                                    |                     |     |     |                     |     |     |       |
| Junction to Case                        |                                                                                                                    |                     |     | 3   |                     |     | 3   | °C/W  |
| Junction to Ambient                     |                                                                                                                    |                     |     | 35  |                     |     | 35  | °C/W  |

**LM120H-15 ELECTRICAL CHARACTERISTICS**

| Order Numbers                                                 |                                                                                                                             | Metal Can Package |              |                | Units            |
|---------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------|-------------------|--------------|----------------|------------------|
|                                                               |                                                                                                                             | LM120H-15<br>(TO) |              |                |                  |
| Design Output Current (I <sub>D</sub> )                       |                                                                                                                             | 0.2A              |              |                |                  |
| Device Dissipation (P <sub>D</sub> )                          |                                                                                                                             | 2W                |              |                |                  |
| Parameter                                                     | Conditions <sup>(1)</sup>                                                                                                   | Min               | Typ          | Max            |                  |
| Output Voltage                                                | T <sub>J</sub> = 25°C, V <sub>IN</sub> = 20V,<br>I <sub>LOAD</sub> = 5 mA                                                   | -15.3             | -15          | -14.7          | V                |
| Line Regulation                                               | T <sub>J</sub> = 25°C, I <sub>LOAD</sub> = 5 mA,<br>V <sub>MIN</sub> ≤ V <sub>IN</sub> ≤ V <sub>MAX</sub>                   |                   | 5            | 10             | mV               |
| Input Voltage                                                 |                                                                                                                             | -35               |              | -17            | V                |
| Ripple Rejection                                              | f = 120 Hz                                                                                                                  | 56                | 80           |                | dB               |
| Load Regulation,<br><sup>(2)</sup>                            | T <sub>J</sub> = 25°C, V <sub>IN</sub> = 20V,<br>5 mA ≤ I <sub>LOAD</sub> ≤ I <sub>D</sub>                                  |                   | 10           | 25             | mV               |
| Output Voltage,<br><sup>(1)</sup>                             | 17.5V ≤ V <sub>IN</sub> ≤ V <sub>MAX</sub> ,<br>5 mA ≤ I <sub>LOAD</sub> ≤ I <sub>D</sub> , P ≤ P <sub>D</sub>              | -15.5             |              | -14.5          | V                |
| Quiescent Current                                             | V <sub>MIN</sub> ≤ V <sub>IN</sub> ≤ V <sub>MAX</sub>                                                                       |                   | 2            | 4              | mA               |
| Quiescent Current<br>Change                                   | T <sub>J</sub> = 25°C<br>V <sub>MIN</sub> ≤ V <sub>IN</sub> ≤ V <sub>MAX</sub><br>5 mA ≤ I <sub>LOAD</sub> ≤ I <sub>D</sub> |                   | 0.05<br>0.03 | 0.4<br>0.4     | mA<br>mA         |
| Output Noise Voltage                                          | T <sub>A</sub> = 25°C, C <sub>L</sub> = 1 μF, I <sub>L</sub> = 5 mA,<br>V <sub>IN</sub> = 20V, 10 Hz ≤ f ≤ 100 kHz          |                   | 400          |                | μV               |
| Long Term Stability                                           |                                                                                                                             |                   | 15           | 150            | mV               |
| Thermal Resistance<br>Junction to Case<br>Junction to Ambient |                                                                                                                             |                   |              | <br>(3)<br>(3) | <br>°C/W<br>°C/W |

(1) This specification applies over  $-55^\circ\text{C} \leq T_J \leq +150^\circ\text{C}$  for the LM120 and  $0^\circ\text{C} \leq T_J \leq +125^\circ\text{C}$  for the LM320-N.

(2) Regulation is measured at constant junction temperature. Changes in output voltage due to heating effects must be taken into account separately. To ensure constant junction temperature, low duty cycle, pulse testing is used. The LM120/LM320-N series does have low thermal feedback, improving line and load regulation. On all other tests, even though power dissipation is internally limited, electrical specifications apply only up to  $P_D$ .

(3) Thermal resistance of typically  $85^\circ\text{C/W}$  (in 400 linear feet/min air flow),  $224^\circ\text{C/W}$  (in static air) junction to ambient, of typically  $21^\circ\text{C/W}$  junction to case.

**LM320T-15 ELECTRICAL CHARACTERISTICS**

| Order Numbers                                                 |                                                                                                                             | Power Plastic Package |            |            | Units        |
|---------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------|-----------------------|------------|------------|--------------|
|                                                               |                                                                                                                             | LM320T-15<br>(TO-220) |            |            |              |
| Design Output Current (I <sub>D</sub> )                       |                                                                                                                             | 1A                    |            |            |              |
| Device Dissipation (P <sub>D</sub> )                          |                                                                                                                             | 15W                   |            |            |              |
| Parameter                                                     | Conditions <sup>(1)</sup>                                                                                                   | Min                   | Typ        | Max        |              |
| Output Voltage                                                | T <sub>J</sub> = 25°C, V <sub>IN</sub> = 20V,<br>I <sub>LOAD</sub> = 5 mA                                                   | -15.5                 | -15        | -14.5      | V            |
| Line Regulation                                               | T <sub>J</sub> = 25°C, I <sub>LOAD</sub> = 5 mA,<br>V <sub>MIN</sub> ≤ V <sub>IN</sub> ≤ V <sub>MAX</sub>                   |                       | 5          | 20         | mV           |
| Input Voltage                                                 |                                                                                                                             | -35                   |            | -17.5      | V            |
| Ripple Rejection                                              | f = 120 Hz                                                                                                                  | 56                    | 80         |            | dB           |
| Load Regulation,<br>(2)                                       | T <sub>J</sub> = 25°C, V <sub>IN</sub> = 20V,<br>5 mA ≤ I <sub>LOAD</sub> ≤ I <sub>D</sub>                                  |                       | 30         | 80         | mV           |
| Output Voltage,<br>(1)                                        | 17.5V ≤ V <sub>IN</sub> ≤ V <sub>MAX</sub> ,<br>5 mA ≤ I <sub>LOAD</sub> ≤ I <sub>D</sub> , P ≤ P <sub>D</sub>              | -15.7                 |            | -14.3      | V            |
| Quiescent Current                                             | V <sub>MIN</sub> ≤ V <sub>IN</sub> ≤ V <sub>MAX</sub>                                                                       |                       | 2          | 4          | mA           |
| Quiescent Current<br>Change                                   | T <sub>J</sub> = 25°C<br>V <sub>MIN</sub> ≤ V <sub>IN</sub> ≤ V <sub>MAX</sub><br>5 mA ≤ I <sub>LOAD</sub> ≤ I <sub>D</sub> |                       | 0.1<br>0.1 | 0.4<br>0.4 | mA<br>mA     |
| Output Noise Voltage                                          | T <sub>A</sub> = 25°C, C <sub>L</sub> = 1 μF, I <sub>L</sub> = 5 mA,<br>V <sub>IN</sub> = 20V, 10 Hz ≤ f ≤ 100 kHz          |                       | 400        |            | μV           |
| Long Term Stability                                           |                                                                                                                             |                       | 30         |            | mV           |
| Thermal Resistance<br>Junction to Case<br>Junction to Ambient |                                                                                                                             |                       | 4<br>50    |            | °C/W<br>°C/W |

(1) This specification applies over  $-55^\circ\text{C} \leq T_J \leq +150^\circ\text{C}$  for the LM120 and  $0^\circ\text{C} \leq T_J \leq +125^\circ\text{C}$  for the LM320-N.

(2) Regulation is measured at constant junction temperature. Changes in output voltage due to heating effects must be taken into account separately. To ensure constant junction temperature, low duty cycle, pulse testing is used. The LM120/LM320-N series does have low thermal feedback, improving line and load regulation. On all other tests, even though power dissipation is internally limited, electrical specifications apply only up to  $P_D$ .

## TYPICAL PERFORMANCE CHARACTERISTICS

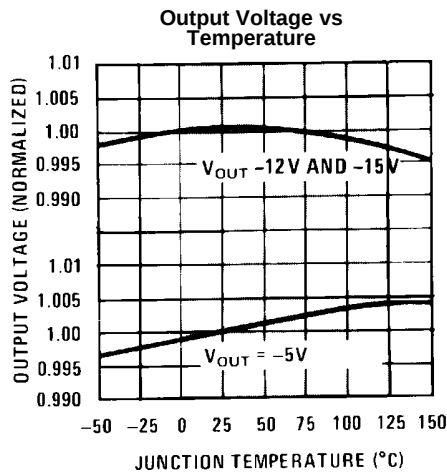


Figure 3.

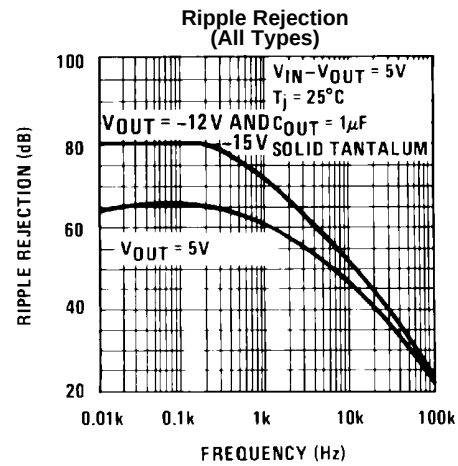


Figure 4.

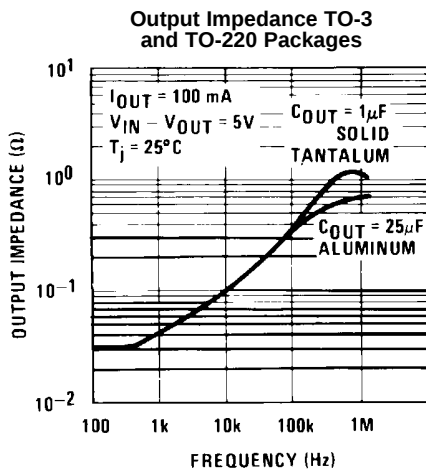


Figure 5.

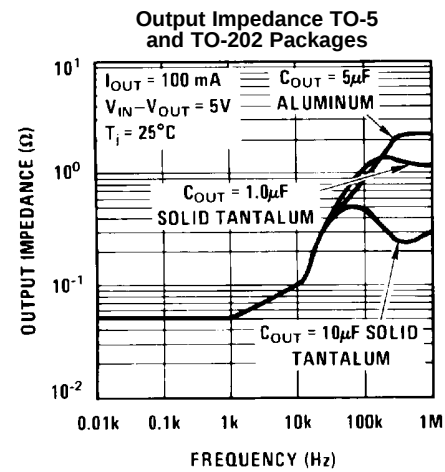


Figure 6.

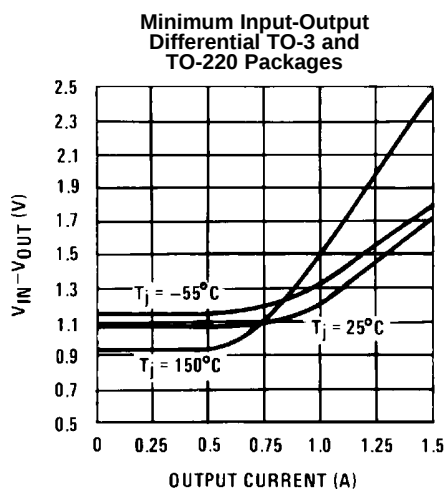


Figure 7.

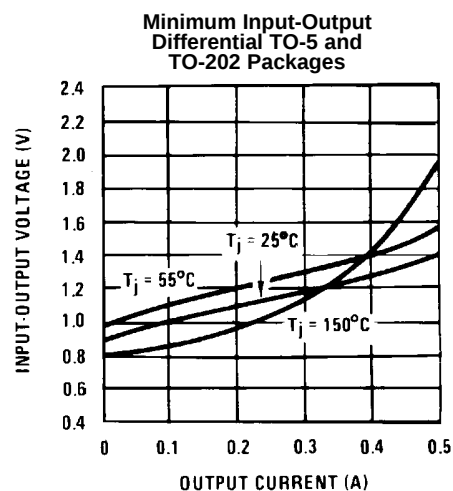


Figure 8.

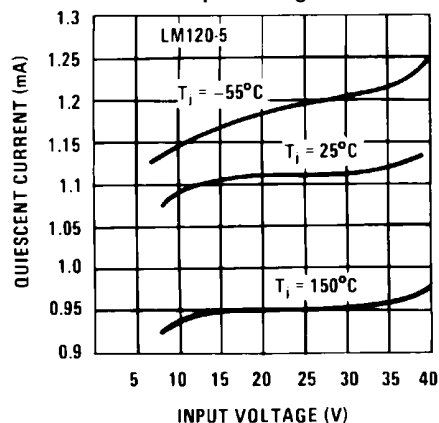
**TYPICAL PERFORMANCE CHARACTERISTICS (continued)****Quiescent Current vs  
Input Voltage**

Figure 9.

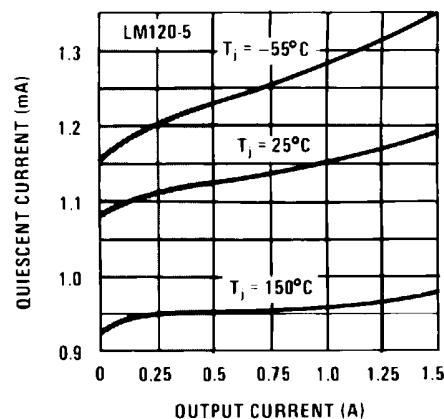
**Quiescent Current vs  
Load Current**

Figure 10.

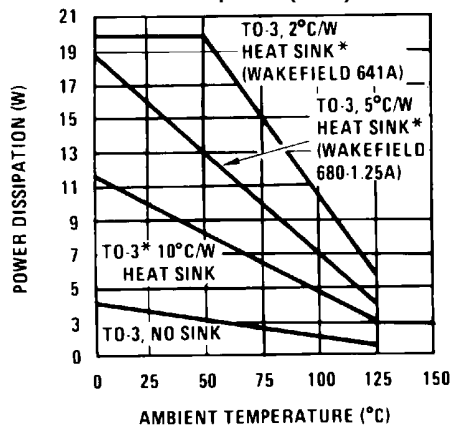
**Maximum Average Power  
Dissipation (TO-3)**

Figure 11.

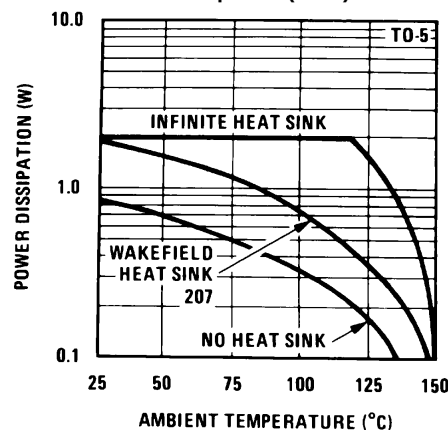
\*These curves for LM120. Derate  $25^\circ\text{C}$  further for LM320-N.**Maximum Average Power  
Dissipation (TO-5)**

Figure 12.


**Maximum Average Power  
Dissipation (TO-202)**

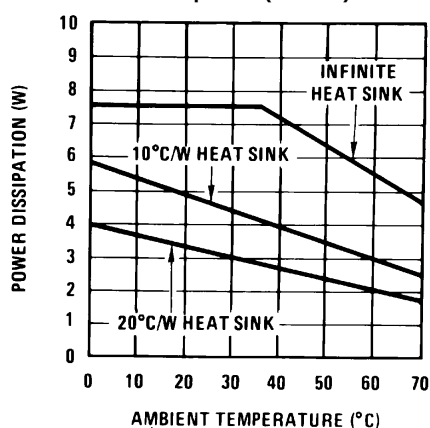Figure 13.

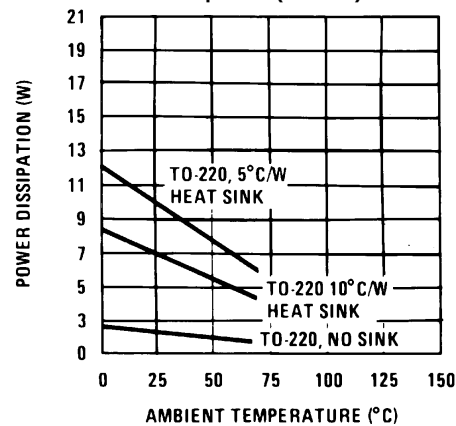
**Maximum Average Power  
Dissipation (TO-220)**

Figure 14.

## TYPICAL PERFORMANCE CHARACTERISTICS (continued)


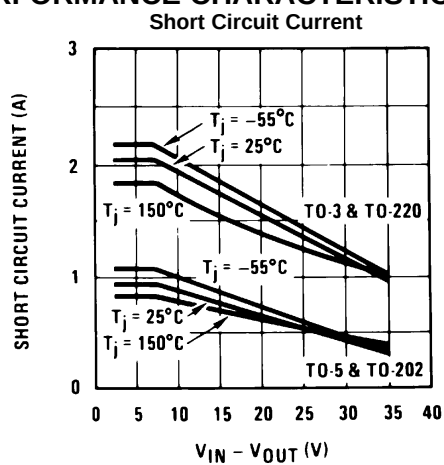


Figure 15.

## TYPICAL APPLICATIONS

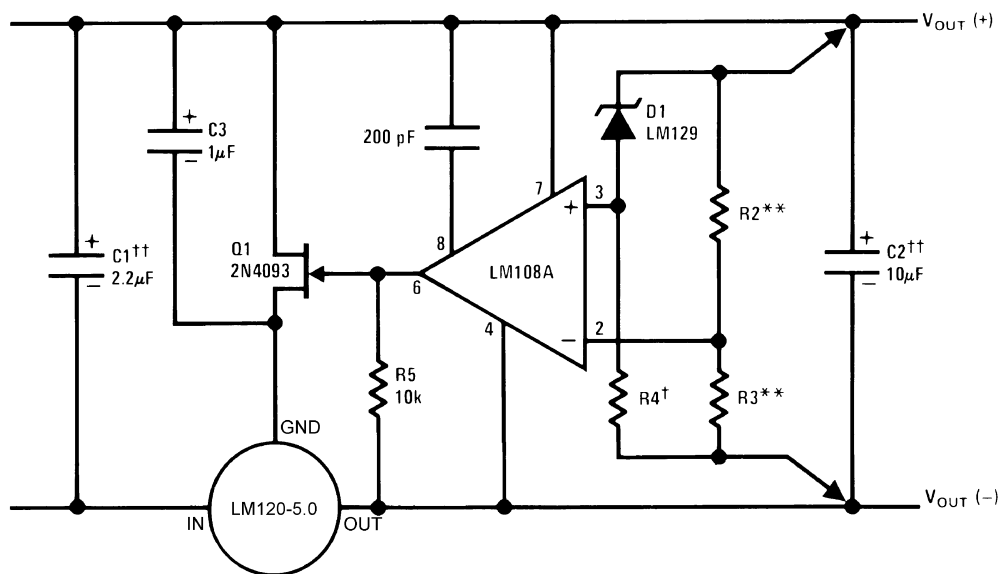

Load and line regulation — 0.01% temperature stability — 0.2%


†Determines Zener current.

††Solid tantalum.

An LM120-12 or LM120-15 may be used to permit higher input voltages, but the regulated output voltage must be at least -15V when using the LM120-12 and -18V for the LM120-15.

\*\*Select resistors to set output voltage. 2 ppm/°C tracking suggested.

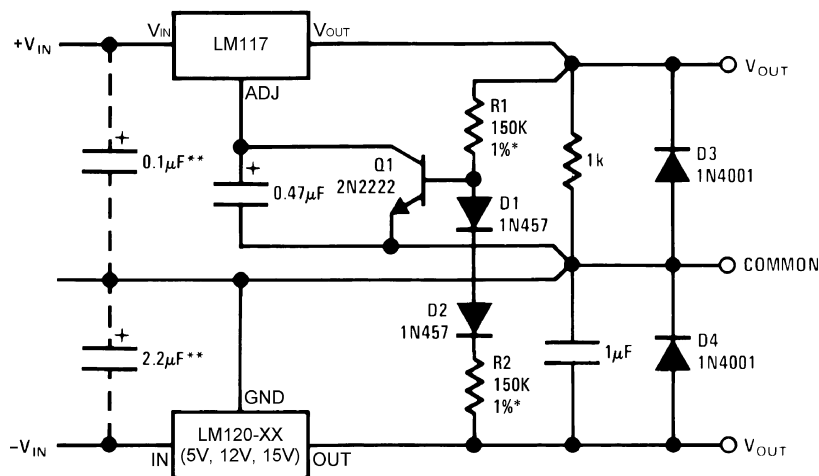**Figure 16. High Stability 1 Amp Regulator**



\*Resistor tolerance of R1 and R2 determine matching of (+) and (-) inputs.

\*\*Necessary only if raw supply capacitors are more than 3" from regulators

An LM3086N array may substitute for Q1, D1 and D2 for better stability and tracking. In the array diode transistors Q5 and Q4 (in parallel) make up D2; similarly, Q1 and Q2 become D1 and Q3 replaces the 2N2222.

**Figure 17. Wide Range Tracking Regulator**


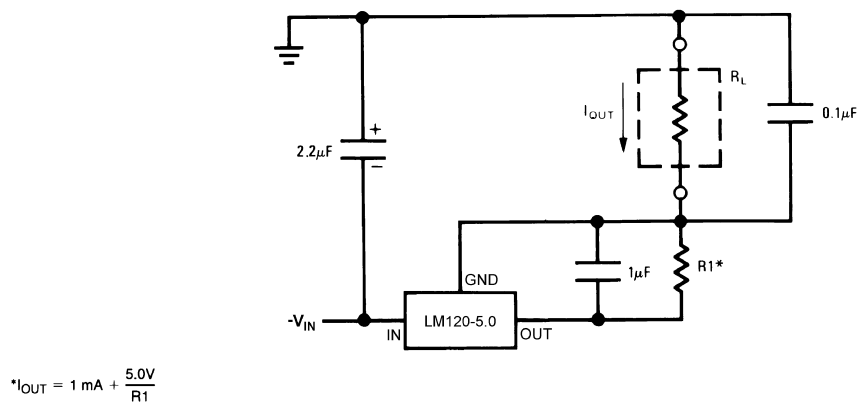


Figure 18. Current Source

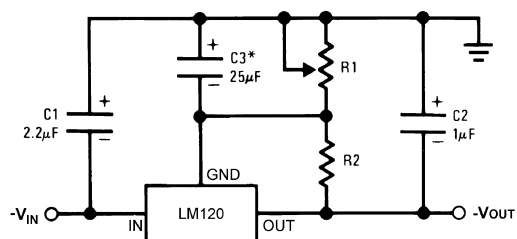

SELECT R2 AS FOLLOWS:

LM120-5      300Ω


LM120-12    750Ω

LM120-15    1k

$$V_{OUT} = V_{SET} \frac{R_1 + R_2}{R_2}$$

\*C3 optional. Improves transient response and ripple rejection.

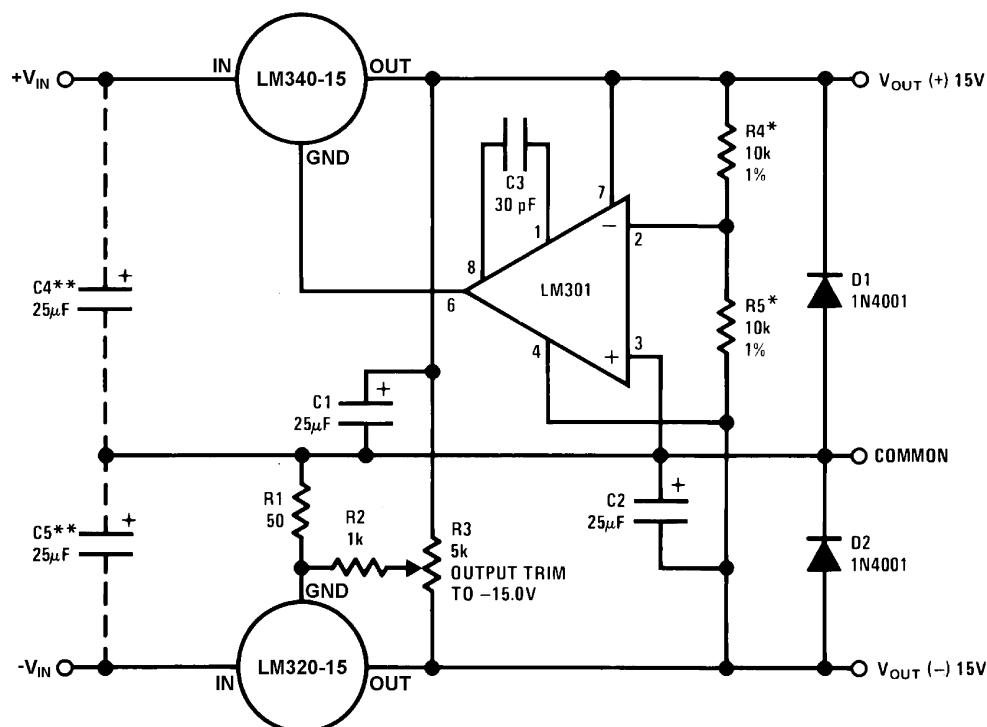Figure 19. Variable Output Current Source



See [Performance \(Typical\)](#)

\*Resistor tolerance of R4 and R5 determine matching of (+) and (-) outputs.


\*\*Necessary only if raw supply filter capacitors are more than 2 inches from regulators.

### Figure 20. $\pm 15\text{V}$ , 1 Amp Tracking Regulators
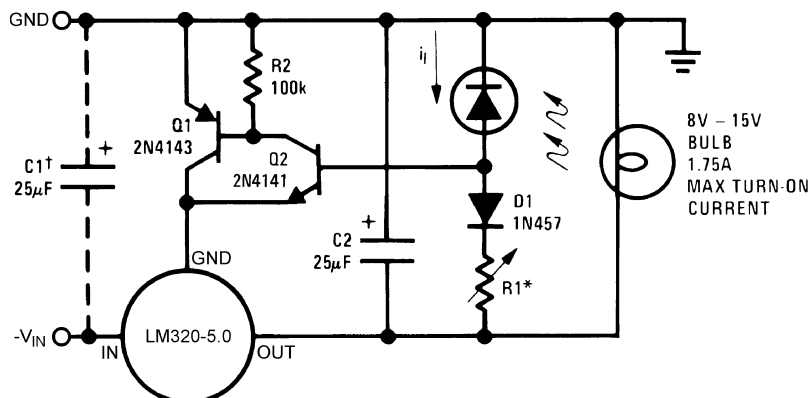
### Performance (Typical)


|                                                         |                   |                   |
|---------------------------------------------------------|-------------------|-------------------|
| Load Regulation at $\Delta I_L = 1A$                    | 10 mV             | 1 mV              |
| Output Ripple, $C_{IN} = 3000 \mu F$ ,<br>$I_L = 1A$    | 100 $\mu V_{rms}$ | 100 $\mu V_{rms}$ |
| Temperature Stability                                   | +50 mV            | +50 mV            |
| Output Noise $10 \text{ Hz} \leq f \leq 10 \text{ kHz}$ | 150 $\mu V_{rms}$ | 150 $\mu V_{rms}$ |

## Light Controllers Using Silicon Photo Cells



\*Lamp brightness increases until  $i_1 = 5V/R_1$  ( $i_1$  can be set as low as  $1 \mu A$ ).

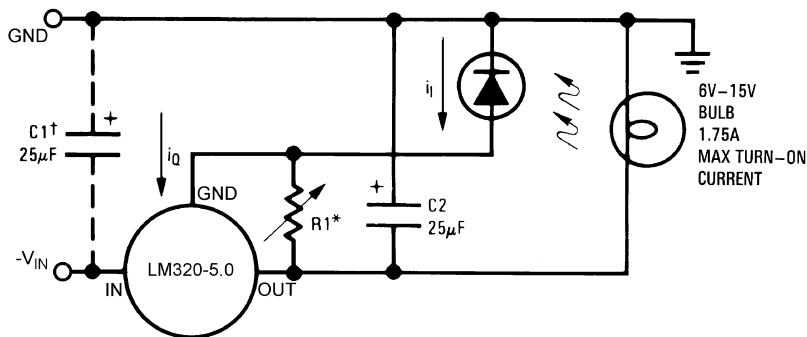†Necessary only if raw supply filter capacitor is more than 2 inches from LM320MP.



\*Lamp brightness increases until  $i_l = i_Q (1 \text{ mA}) + 5V/R1$ .

†Necessary only if raw supply filter capacitor is more than 2 inches from LM320-N.

## Connection Diagram

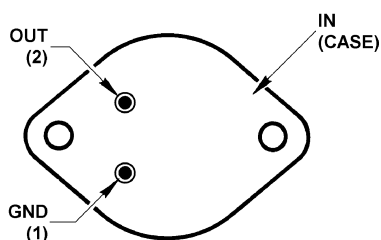


Figure 21. Steel Metal Can Package TO-3 (NDS)  
(Bottom View)

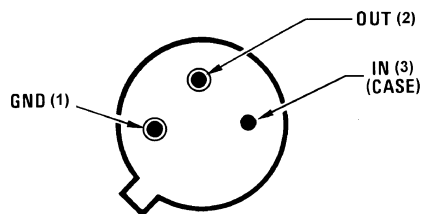


Figure 22. Metal Can Package TO (NDT)  
(Bottom View)

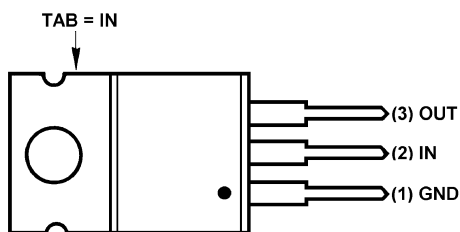


Figure 23. Power Package TO-220 (NDE)  
(Front View)

## Schematic Diagrams

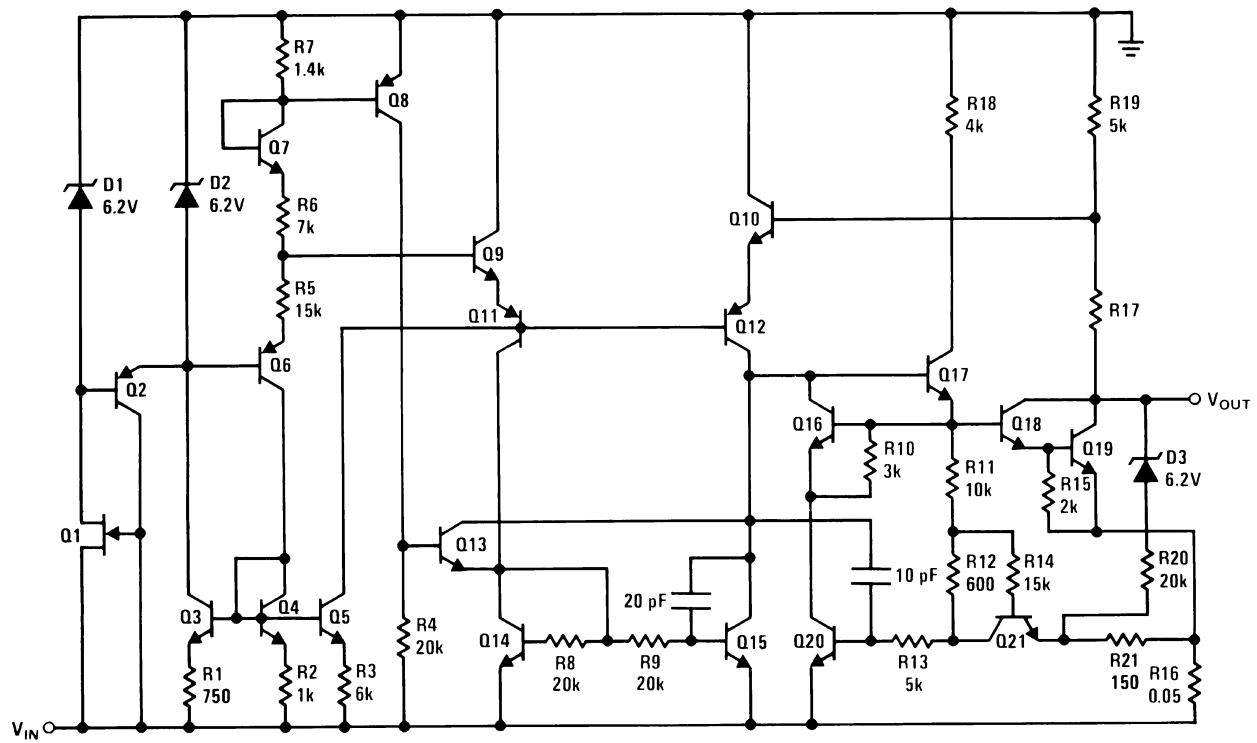


Figure 24. -5V

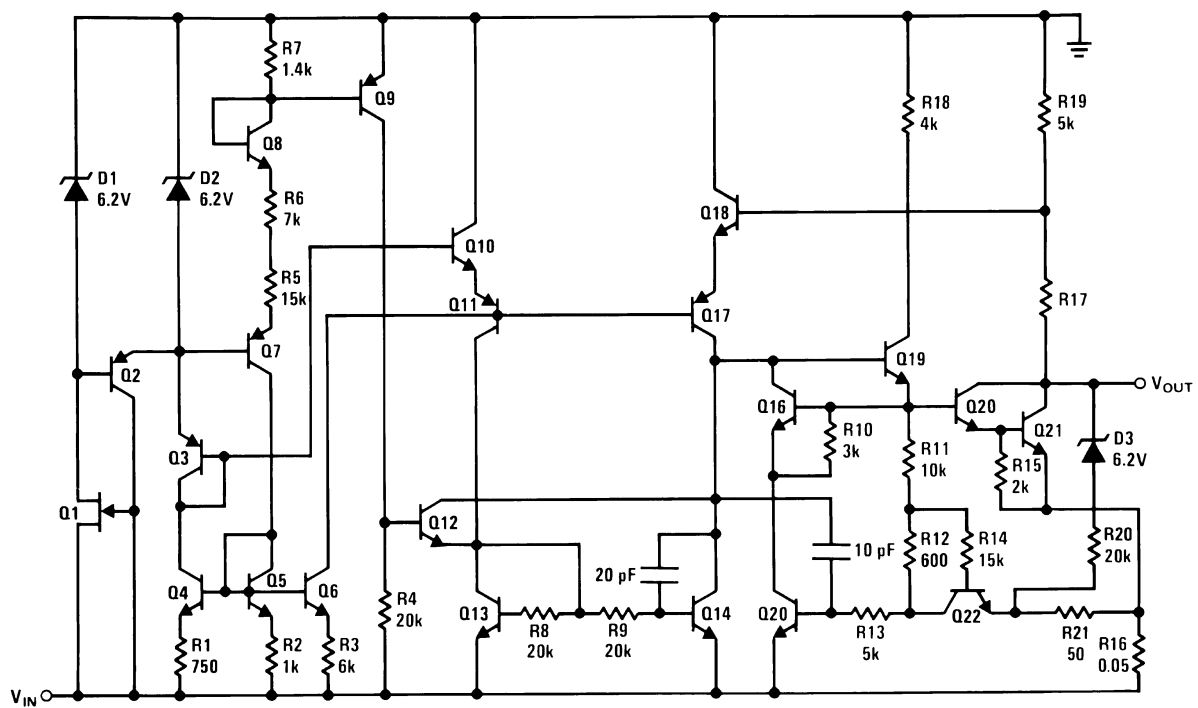


Figure 25. -12V and -15V

## REVISION HISTORY

| Changes from Revision B (April 2013) to Revision C         | Page               |
|------------------------------------------------------------|--------------------|
| • Changed layout of National Data Sheet to TI format ..... | <a href="#">16</a> |

## PACKAGING INFORMATION

| Orderable Device | Status<br>(1) | Package Type | Package<br>Drawing | Pins | Package<br>Qty | Eco Plan<br>(2)            | Lead/Ball Finish<br>(6) | MSL Peak Temp<br>(3) | Op Temp (°C) | Device Marking<br>(4/5)           | Samples                 |
|------------------|---------------|--------------|--------------------|------|----------------|----------------------------|-------------------------|----------------------|--------------|-----------------------------------|-------------------------|
| LM120H-12        | ACTIVE        | TO           | NDT                | 3    | 500            | Green (RoHS<br>& no Sb/Br) | AU   Call TI            | Level-1-NA-UNLIM     | -55 to 150   | ( LM120H-12P+, LM1<br>20H-12P+)   | <a href="#">Samples</a> |
| LM120H-12/NOPB   | ACTIVE        | TO           | NDT                | 3    | 500            | Green (RoHS<br>& no Sb/Br) | AU   Call TI            | Level-1-NA-UNLIM     | -55 to 150   | ( LM120H-12P+, LM1<br>20H-12P+)   | <a href="#">Samples</a> |
| LM120H-15        | ACTIVE        | TO           | NDT                | 3    | 500            | Green (RoHS<br>& no Sb/Br) | Call TI                 | Level-1-NA-UNLIM     | -55 to 150   | ( LM120H-15P+, LM1<br>20H-15P+)   | <a href="#">Samples</a> |
| LM120H-15/NOPB   | ACTIVE        | TO           | NDT                | 3    | 500            | Green (RoHS<br>& no Sb/Br) | AU   Call TI            | Level-1-NA-UNLIM     | -55 to 150   | ( LM120H-15P+, LM1<br>20H-15P+)   | <a href="#">Samples</a> |
| LM120H-5.0       | ACTIVE        | TO           | NDT                | 3    | 500            | Green (RoHS<br>& no Sb/Br) | AU   Call TI            | Level-1-NA-UNLIM     | -55 to 150   | ( LM120H-5.0P+, LM<br>120H-5.0P+) | <a href="#">Samples</a> |
| LM120H-5.0/NOPB  | ACTIVE        | TO           | NDT                | 3    | 500            | Green (RoHS<br>& no Sb/Br) | AU   Call TI            | Level-1-NA-UNLIM     | -55 to 150   | ( LM120H-5.0P+, LM<br>120H-5.0P+) | <a href="#">Samples</a> |
| LM320T-15        | NRND          | TO-220       | NDE                | 3    | 45             | TBD                        | Call TI                 | Call TI              | 0 to 125     | LM320T<br>-15 P+                  |                         |
| LM320T-15/NOPB   | ACTIVE        | TO-220       | NDE                | 3    | 45             | Green (RoHS<br>& no Sb/Br) | CU SN                   | Level-1-NA-UNLIM     | 0 to 125     | LM320T<br>-15 P+                  | <a href="#">Samples</a> |

(1) The marketing status values are defined as follows:

**ACTIVE:** Product device recommended for new designs.

**LIFEBUY:** TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

**PREVIEW:** Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

(2) **RoHS:** TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".

**RoHS Exempt:** TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.

**Green:** TI defines "Green" to mean the content of Chlorine (Cl) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of <=1000ppm threshold. Antimony trioxide based flame retardants must also meet the <=1000ppm threshold requirement.

(3) MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

(4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.


<sup>(5)</sup> Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "-" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

<sup>(6)</sup> Lead/Ball Finish - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead/Ball Finish values may wrap to two lines if the finish value exceeds the maximum column width.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

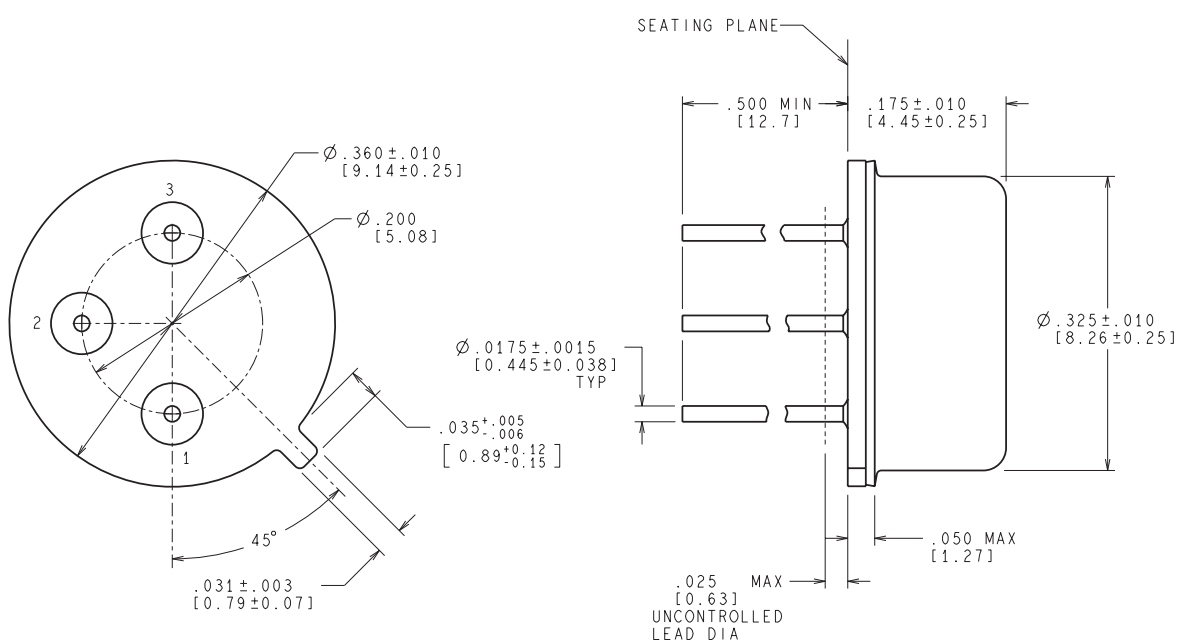NDT0003A




CONTROLLING DIMENSION IS INCH  
VALUES IN [ ] ARE MILLIMETERS

MIL-PRF-38535  
CONFIGURATION CONTROL

H03A (Rev D)

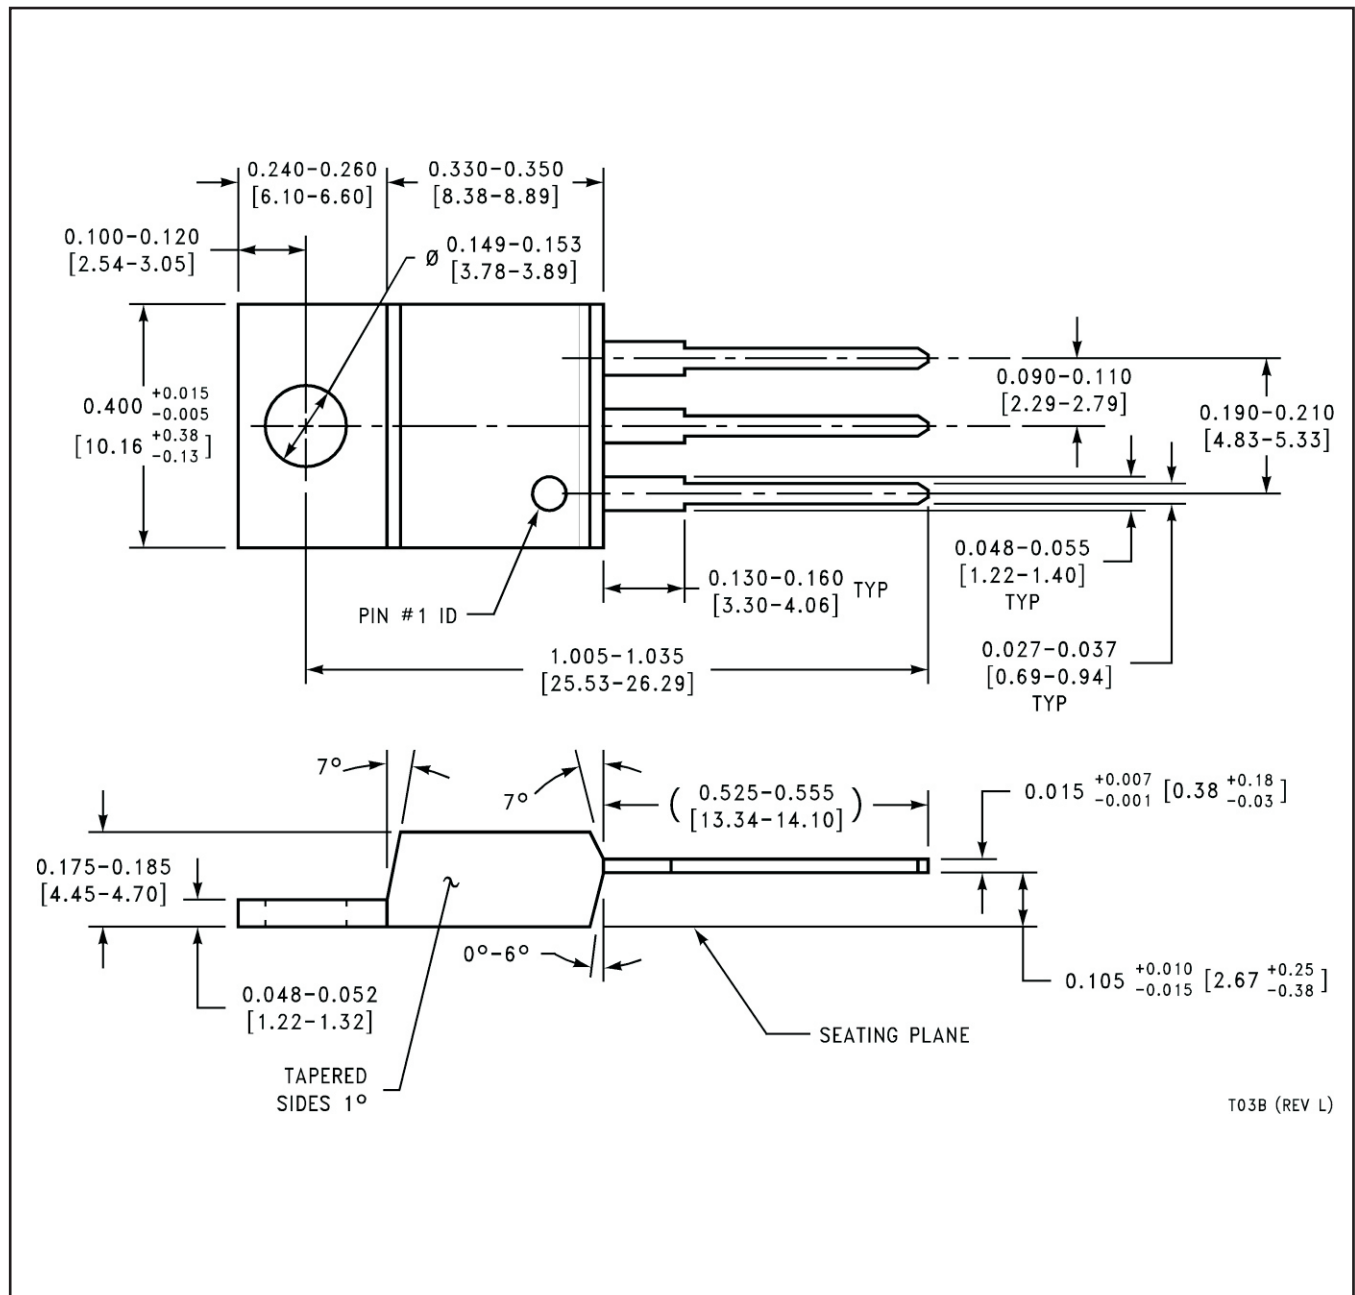NDE0003B



## IMPORTANT NOTICE

Texas Instruments Incorporated (TI) reserves the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46, latest issue, and to discontinue any product or service per JESD48, latest issue. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete.

TI's published terms of sale for semiconductor products (<http://www.ti.com/sc/docs/stdterms.htm>) apply to the sale of packaged integrated circuit products that TI has qualified and released to market. Additional terms may apply to the use or sale of other types of TI products and services.

Reproduction of significant portions of TI information in TI data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such reproduced documentation. Information of third parties may be subject to additional restrictions. Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyers and others who are developing systems that incorporate TI products (collectively, "Designers") understand and agree that Designers remain responsible for using their independent analysis, evaluation and judgment in designing their applications and that Designers have full and exclusive responsibility to assure the safety of Designers' applications and compliance of their applications (and of all TI products used in or for Designers' applications) with all applicable regulations, laws and other applicable requirements. Designer represents that, with respect to their applications, Designer has all the necessary expertise to create and implement safeguards that (1) anticipate dangerous consequences of failures, (2) monitor failures and their consequences, and (3) lessen the likelihood of failures that might cause harm and take appropriate actions. Designer agrees that prior to using or distributing any applications that include TI products, Designer will thoroughly test such applications and the functionality of such TI products as used in such applications.

TI's provision of technical, application or other design advice, quality characterization, reliability data or other services or information, including, but not limited to, reference designs and materials relating to evaluation modules, (collectively, "TI Resources") are intended to assist designers who are developing applications that incorporate TI products; by downloading, accessing or using TI Resources in any way, Designer (individually or, if Designer is acting on behalf of a company, Designer's company) agrees to use any particular TI Resource solely for this purpose and subject to the terms of this Notice.

TI's provision of TI Resources does not expand or otherwise alter TI's applicable published warranties or warranty disclaimers for TI products, and no additional obligations or liabilities arise from TI providing such TI Resources. TI reserves the right to make corrections, enhancements, improvements and other changes to its TI Resources. TI has not conducted any testing other than that specifically described in the published documentation for a particular TI Resource.

Designer is authorized to use, copy and modify any individual TI Resource only in connection with the development of applications that include the TI product(s) identified in such TI Resource. NO OTHER LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE TO ANY OTHER TI INTELLECTUAL PROPERTY RIGHT, AND NO LICENSE TO ANY TECHNOLOGY OR INTELLECTUAL PROPERTY RIGHT OF TI OR ANY THIRD PARTY IS GRANTED HEREIN, including but not limited to any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information regarding or referencing third-party products or services does not constitute a license to use such products or services, or a warranty or endorsement thereof. Use of TI Resources may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

TI RESOURCES ARE PROVIDED "AS IS" AND WITH ALL FAULTS. TI DISCLAIMS ALL OTHER WARRANTIES OR REPRESENTATIONS, EXPRESS OR IMPLIED, REGARDING RESOURCES OR USE THEREOF, INCLUDING BUT NOT LIMITED TO ACCURACY OR COMPLETENESS, TITLE, ANY EPIDEMIC FAILURE WARRANTY AND ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, AND NON-INFRINGEMENT OF ANY THIRD PARTY INTELLECTUAL PROPERTY RIGHTS. TI SHALL NOT BE LIABLE FOR AND SHALL NOT DEFEND OR INDEMNIFY DESIGNER AGAINST ANY CLAIM, INCLUDING BUT NOT LIMITED TO ANY INFRINGEMENT CLAIM THAT RELATES TO OR IS BASED ON ANY COMBINATION OF PRODUCTS EVEN IF DESCRIBED IN TI RESOURCES OR OTHERWISE. IN NO EVENT SHALL TI BE LIABLE FOR ANY ACTUAL, DIRECT, SPECIAL, COLLATERAL, INDIRECT, PUNITIVE, INCIDENTAL, CONSEQUENTIAL OR EXEMPLARY DAMAGES IN CONNECTION WITH OR ARISING OUT OF TI RESOURCES OR USE THEREOF, AND REGARDLESS OF WHETHER TI HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

Unless TI has explicitly designated an individual product as meeting the requirements of a particular industry standard (e.g., ISO/TS 16949 and ISO 26262), TI is not responsible for any failure to meet such industry standard requirements.

Where TI specifically promotes products as facilitating functional safety or as compliant with industry functional safety standards, such products are intended to help enable customers to design and create their own applications that meet applicable functional safety standards and requirements. Using products in an application does not by itself establish any safety features in the application. Designers must ensure compliance with safety-related requirements and standards applicable to their applications. Designer may not use any TI products in life-critical medical equipment unless authorized officers of the parties have executed a special contract specifically governing such use. Life-critical medical equipment is medical equipment where failure of such equipment would cause serious bodily injury or death (e.g., life support, pacemakers, defibrillators, heart pumps, neurostimulators, and implantables). Such equipment includes, without limitation, all medical devices identified by the U.S. Food and Drug Administration as Class III devices and equivalent classifications outside the U.S.

TI may expressly designate certain products as completing a particular qualification (e.g., Q100, Military Grade, or Enhanced Product). Designers agree that it has the necessary expertise to select the product with the appropriate qualification designation for their applications and that proper product selection is at Designers' own risk. Designers are solely responsible for compliance with all legal and regulatory requirements in connection with such selection.

Designer will fully indemnify TI and its representatives against any damages, costs, losses, and/or liabilities arising out of Designer's non-compliance with the terms and provisions of this Notice.

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View LM120H-15/NOPB](#) on WIN SOURCE

 [Texas Instruments](#) Information

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management