



**THE DATASHEET OF
6N135WV**





SINGLE-CHANNEL: 6N135
DUAL-CHANNEL: HCPL-2530

6N136
HCPL-2531

HCPL-2503

HCPL-4502

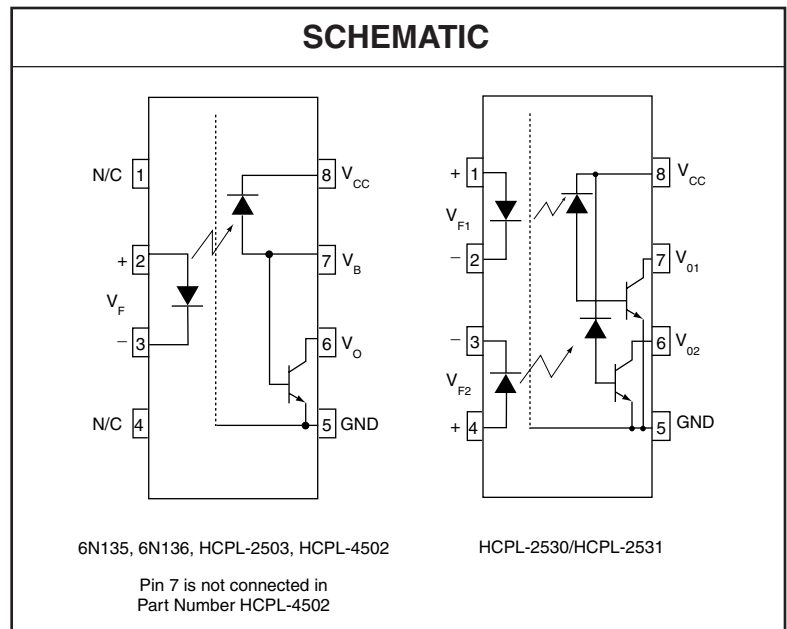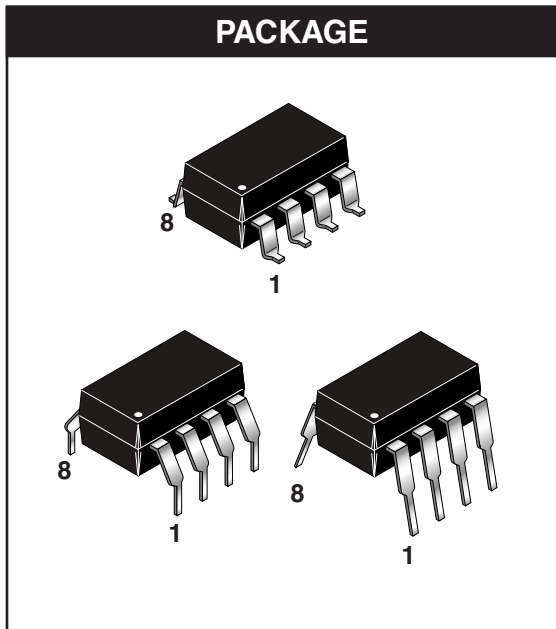

DESCRIPTION

The HCPL-4502/HCPL-2503, 6N135/6 and HCPL-2530/HCPL-2531 optocouplers consist of an AlGaAs LED optically coupled to a high speed photodetector transistor.

A separate connection for the bias of the photodiode improves the speed by several orders of magnitude over conventional phototransistor optocouplers by reducing the base-collector capacitance of the input transistor.

An internal noise shield provides superior common mode rejection of 10kV/μs. An improved package allows superior insulation permitting a 480 V working voltage compared to industry standard of 220 V.

FEATURES

- High speed-1 MBit/s
- Superior CMR-10 kV/μs
- Dual-Channel HCPL-2530/HCPL-2531
- Double working voltage-480V RMS
- CTR guaranteed 0-70°C
- U.L. recognized (File # E90700)

APPLICATIONS

- Line receivers
- Pulse transformer replacement
- Output interface to CMOS-LSTTL-TTL
- Wide bandwidth analog coupling

SINGLE-CHANNEL: 6N135
DUAL-CHANNEL: HCPL-2530

6N136
HCPL-2531

HCPL-2503

HCPL-4502

ABSOLUTE MAXIMUM RATINGS ($T_A = 25^\circ\text{C}$ unless otherwise specified)

| Parameter | Symbol | Value | Units |
|--|--|----------------|------------------|
| Storage Temperature | T_{STG} | -55 to +125 | $^\circ\text{C}$ |
| Operating Temperature | T_{OPR} | -55 to +100 | $^\circ\text{C}$ |
| Lead Solder Temperature | T_{SOL} | 260 for 10 sec | $^\circ\text{C}$ |
| EMITTER | | | |
| DC/Average Forward Input Current | Each Channel (Note 1) | I_F (avg) | 25 mA |
| Peak Forward Input Current (50% duty cycle, 1 ms P.W.) | Each Channel (Note 2) | I_F (pk) | 50 mA |
| Peak Transient Input Current - ($\leq 1 \mu\text{s}$ P.W., 300 pps) | Each Channel | I_F (trans) | 1.0 A |
| Reverse Input Voltage | Each Channel | V_R | 5 V |
| Input Power Dissipation | (6N135/6N136 and HCPL-2503/4502) (HCPL-2530/2531) Each Channel (Note 3) | P_D | 100 45 mW |
| DETECTOR | | | |
| Average Output Current | Each Channel | I_O (avg) | 8 mA |
| Peak Output Current | Each Channel | I_O (pk) | 16 mA |
| Emitter-Base Reverse Voltage | (6N135, 6N136 and HCPL-2503 only) | V_{EBR} | 5 V |
| Supply Voltage | | V_{CC} | -0.5 to 30 V |
| Output Voltage | | V_O | -0.5 to 20 V |
| Base Current | (6N135, 6N136 and HCPL-2503 only) | I_B | 5 mA |
| Output power dissipation | (6N135, 6N136, HCPL-2503, HCPL-4502) (Note 4) (HCPL-2530, HCPL-2531) Each Channel | P_D | 100 35 mW |

SINGLE-CHANNEL: 6N135

6N136

HCPL-2503

HCPL-4502

DUAL-CHANNEL: HCPL-2530

HCPL-2531

ELECTRICAL CHARACTERISTICS ($T_A = 0$ to 70°C Unless otherwise specified)

INDIVIDUAL COMPONENT CHARACTERISTICS

| Parameter | Test Conditions | Symbol | Device | Min | Typ** | Max | Unit |
|--|--|-------------------------------|--|-----|-------|-----|----------------------|
| EMITTER Input Forward Voltage | ($I_F = 16$ mA, $T_A = 25^\circ\text{C}$) | V_F | | | 1.45 | 1.7 | V |
| | ($I_F = 16$ mA) | | | | 1.8 | | |
| Input Reverse Breakdown Voltage | ($I_R = 10$ μA) | B_{VR} | | 5.0 | | | V |
| Temperature coefficient of forward voltage | ($I_F = 16$ mA) | ($\Delta V_F / \Delta T_A$) | | | -1.6 | | mV/ $^\circ\text{C}$ |
| DETECTOR Logic high output current | ($I_F = 0$ mA, $V_O = V_{CC} = 5.5$ V) ($T_A = 25^\circ\text{C}$) | I_{OH} | All | | 0.001 | 0.5 | μA |
| | ($I_F = 0$ mA, $V_O = V_{CC} = 15$ V) ($T_A = 25^\circ\text{C}$) | | 6N135 6N136 HCPL-4502 HCPL-2503 | | 0.005 | 1 | |
| | ($I_F = 0$ mA, $V_O = V_{CC} = 15$ V) | | All | | | 50 | |
| Logic low supply current | ($I_F = 16$ mA, $V_O = \text{Open}$) ($V_{CC} = 15$ V) | I_{CCL} | 6N135 6N136 HCPL-4502 HCPL-2503 | | 120 | 200 | μA |
| | ($I_{F1} = I_{F2} = 16$ mA, $V_O = \text{Open}$) ($V_{CC} = 15$ V) | | HCPL-2530 HCPL-2531 | | 200 | 400 | |
| Logic high supply current | ($I_F = 0$ mA, $V_O = \text{Open}$, $V_{CC} = 15$ V) ($T_A = 25^\circ\text{C}$) | I_{CCH} | 6N135 6N136 HCPL-4502 HCPL-2503 | | | 1 | μA |
| | ($I_F = 0$ mA, $V_O = \text{Open}$) ($V_{CC} = 15$ V) | | 6N135 6N136 HCPL-4502 HCPL-2503 | | | 2 | |
| | ($I_F = 0$ mA, $V_O = \text{Open}$) ($V_{CC} = 15$ V) | | HCPL-2530 HCPL-2531 | | 0.02 | 4 | |

** All Typical at $T_A = 25^\circ\text{C}$

SINGLE-CHANNEL: 6N135

6N136

HCPL-2503

HCPL-4502

DUAL-CHANNEL: HCPL-2530

HCPL-2531

TRANSFER CHARACTERISTICS ($T_A = 0$ to 70°C Unless otherwise specified)

| Parameter | Test Conditions | Symbol | Device | Min | Typ** | Max | Unit | | | |
|---|--|--------|---|---|--------------------|-----------|------|------|-----|---|
| COUPLED Current transfer ratio (Note 5) | $(I_F = 16 \text{ mA}, V_O = 0.4 \text{ V})$ $(V_{CC} = 4.5 \text{ V}, T_A = 25^\circ\text{C})$ | CTR | 6N135 HCPL-2530 | 7 | 18 | 50 | % | | | |
| | | | 6N136 HCPL-4502 HCPL-2531 | 19 | 27 | 50 | % | | | |
| | | | HCPL-2503 | 12 | 27 | | % | | | |
| | | | 6N135 HCPL-2530 | 5 | 21 | | % | | | |
| | | | $(I_F = 16 \text{ mA}, V_{CC} = 4.5 \text{ V})$ | $V_{OL}=0.4\text{V}$ | 6N136 HCPL-4502 | 15 | 30 | | % | |
| | | | | $V_{OL}=0.5\text{V}$ | HCPL-2531 | | | | | |
| | | | | $V_{OL}=0.4\text{V}$ | HCPL-2503 | | | | | |
| | | | | $V_{OL}=0.4\text{V}$ | HCPL-2503 | | | | | 9 |
| | | | Logic low output voltage output voltage | $(I_F = 16 \text{ mA}, I_O = 1.1 \text{ mA})$ $(V_{CC} = 4.5 \text{ V}, T_A = 25^\circ\text{C})$ | V _{OL} | 6N135 | | 0.18 | 0.4 | V |
| | | | | | | HCPL-2530 | | 0.18 | 0.5 | |
| $(I_F = 16 \text{ mA}, I_O = 3 \text{ mA})$ $(V_{CC} = 4.5 \text{ V}, T_A = 25^\circ\text{C})$ | 6N136 HCPL-2503 | | | 0.25 | | 0.4 | | | | |
| | HCPL-2531 | | | 0.25 | | 0.5 | | | | |
| $(I_F = 16 \text{ mA}, I_O = 0.8 \text{ mA})$ $(V_{CC} = 4.5 \text{ V})$ | 6N135 HCPL-2530 | | | | | 0.5 | | | | |
| | HCPL-4502 HCPL-2531 | | | | | 0.5 | | | | |

** All Typicals at $T_A = 25^\circ\text{C}$

SINGLE-CHANNEL: 6N135

6N136

HCPL-2503

HCPL-4502

DUAL-CHANNEL: HCPL-2530

HCPL-2531

| SWITCHING CHARACTERISTICS ($T_A = 0$ to 70°C unless otherwise specified., $V_{CC} = 5\text{ V}$) | | | | | | | |
|---|---|------------|--|-----|--------|-----|------------------------|
| Parameter | Test Conditions | Symbol | Device | Min | Typ** | Max | Unit |
| Propagation delay time to logic low | $T_A = 25^\circ\text{C}$, ($R_L = 4.1\text{ k}\Omega$, $I_F = 16\text{ mA}$) (Note 6) (Fig. 7) | T_{PHL} | 6N135 HCPL-2530 | | 0.45 | 1.5 | μs |
| | $(R_L = 1.9\text{ k}\Omega$, $I_F = 16\text{ mA}$) (Note 7) (Fig. 7) $T_A = 25^\circ\text{C}$ | | 6N136 HCPL-4502 HCPL-2503 HCPL-2531 | | 0.45 | 0.8 | μs |
| | $(R_L = 4.1\text{ k}\Omega$, $I_F = 16\text{ mA}$) (Note 6) (Fig. 7) | | 6N135 HCPL-2530 | | | 2.0 | μs |
| | $(R_L = 1.9\text{ k}\Omega$, $I_F = 16\text{ mA}$) (Note 7) (Fig. 7) | | 6N136 HCPL-4502 HCPL-2503 HCPL-2531 | | | 1.0 | μs |
| Propagation delay time to logic high | $T_A = 25^\circ\text{C}$, ($R_L = 4.1\text{ k}\Omega$, $I_F = 16\text{ mA}$) (Note 6) (Fig. 7) | T_{PLH} | 6N135 HCPL-2530 | | 0.5 | 1.5 | μs |
| | $(R_L = 1.9\text{ k}\Omega$, $I_F = 16\text{ mA}$) (Note 7) (Fig. 7) $T_A = 25^\circ\text{C}$ | | 6N136 HCPL-4502 HCPL-2503 HCPL-2531 | | 0.3 | 0.8 | μs |
| | $(R_L = 4.1\text{ k}\Omega$, $I_F = 16\text{ mA}$) (Note 6) (Fig. 7) | | 6N135 HCPL-2530 | | | 2.0 | μs |
| | $(R_L = 1.9\text{ k}\Omega$, $I_F = 16\text{ mA}$) (Note 7) (Fig. 7) | | 6N136 HCPL-4502 HCPL-2503 HCPL-2531 | | | 1.0 | μs |
| Common mode transient immunity at logic high | $(I_F = 0\text{ mA}$, $V_{CM} = 10\text{ V}_{P-P}$, $R_L = 4.1\text{ k}\Omega$) (Note 8) (Fig. 8) $T_A = 25^\circ\text{C}$ | ICM_{HI} | 6N135 HCPL-2530 | | 10,000 | | $\text{V}/\mu\text{s}$ |
| | $(I_F = 0\text{ mA}$, $V_{CM} = 10\text{ V}_{P-P}$) $T_A = 25^\circ\text{C}$, ($R_L = 1.9\text{ k}\Omega$) (Note 8) (Fig. 8) | | 6N136 HCPL-4502 HCPL-2503 HCPL-2531 | | 10,000 | | $\text{V}/\mu\text{s}$ |
| Common mode transient immunity at logic low | $(I_F = 16\text{ mA}$, $V_{CM} = 10\text{ V}_{P-P}$, $R_L = 4.1\text{ k}\Omega$) (Note 8) (Fig. 8) $T_A = 25^\circ\text{C}$ | ICM_{LI} | 6N135 HCPL-2530 | | 10,000 | | $\text{V}/\mu\text{s}$ |
| | $(I_F = 16\text{ mA}$, $V_{CM} = 10\text{ V}_{P-P}$) ($R_L = 1.9\text{ k}\Omega$) (Note 8) (Fig. 8) | | 6N136 HCPL-4502 HCPL-2503 HCPL-2531 | | 10,000 | | $\text{V}/\mu\text{s}$ |

** All Typical at $T_A = 25^\circ\text{C}$

SINGLE-CHANNEL: 6N135

6N136

HCPL-2503

HCPL-4502

DUAL-CHANNEL: HCPL-2530

HCPL-2531

| ISOLATION CHARACTERISTICS ($T_A = 0$ to 70°C Unless otherwise specified) | | | | | | |
|--|---|---------------|------------|--------------|------------|---------------|
| Characteristics | Test Conditions | Symbol | Min | Typ** | Max | Unit |
| Input-output insulation leakage current | (Relative humidity = 45%) ($T_A = 25^\circ\text{C}$, $t = 5$ s) ($V_{I-O} = 3000$ VDC) (Note 9) | I_{I-O} | | | 1.0 | μA |
| Withstand insulation test voltage | (RH $\leq 50\%$, $T_A = 25^\circ\text{C}$) (Note 9) ($t = 1$ min.) | V_{ISO} | 2500 | | | V_{RMS} |
| Resistance (input to output) | (Note 9) ($V_{I-O} = 500$ VDC) | R_{I-O} | | 10^{12} | | Ω |
| Capacitance (input to output) | (Note 9) ($f = 1$ MHz) | C_{I-O} | | 0.6 | | pF |
| DC Current gain | ($I_O = 3$ mA, $V_O = 5$ V) | HFE | | 150 | | |
| Input-Input Insulation leakage current | (RH $\leq 45\%$, $V_{I-I} = 500$ VDC) (Note 10) $t = 5$ s, (HCPL-2530/2531 only) | I_{I-I} | | 0.005 | | μA |
| Input-Input Resistance | ($V_{I-I} = 500$ VDC) (Note 10) (HCPL-2530/2531 only) | R_{I-I} | | 10^{11} | | Ω |
| Input-Input Capacitance | ($f = 1$ MHz) (Note 10) (HCPL-2530/2531 only) | C_{I-I} | | 0.03 | | pF |

Notes

1. Derate linearly above 70°C free-air temperature at a rate of 0.8 mA/ $^\circ\text{C}$.
2. Derate linearly above 70°C free-air temperature at a rate of 1.6 mA/ $^\circ\text{C}$.
3. Derate linearly above 70°C free-air temperature at a rate of 0.9 mW/ $^\circ\text{C}$.
4. Derate linearly above 70°C free-air temperature at a rate of 2.0 mW/ $^\circ\text{C}$.
5. Current Transfer Ratio is defined as a ratio of output collector current, I_O , to the forward LED input current, I_F , times 100%.
6. The 4.1 k Ω load represents 1 LSTTL unit load of 0.36 mA and 6.1 k Ω pull-up resistor.
7. The 1.9 k Ω load represents 1 TTL unit load of 1.6 mA and 5.6 k Ω pull-up resistor.
8. Common mode transient immunity in logic high level is the maximum tolerable (positive) dV_{cm}/dt on the leading edge of the common mode pulse signal V_{CM} , to assure that the output will remain in a logic high state (i.e., $V_O > 2.0$ V). Common mode transient immunity in logic low level is the maximum tolerable (negative) dV_{cm}/dt on the trailing edge of the common mode pulse signal, V_{CM} , to assure that the output will remain in a logic low state (i.e., $V_O < 0.8$ V).
9. Device is considered a two terminal device: Pins 1, 2, 3 and 4 are shorted together and Pins 5, 6, 7 and 8 are shorted together.
10. Measured between pins 1 and 2 shorted together, and pins 3 and 4 shorted together.

SINGLE-CHANNEL: 6N135
DUAL-CHANNEL: HCPL-2530

6N136
HCPL-2531

HCPL-2503

HCPL-4502

Fig. 1 Normalized CTR vs. Forward Current

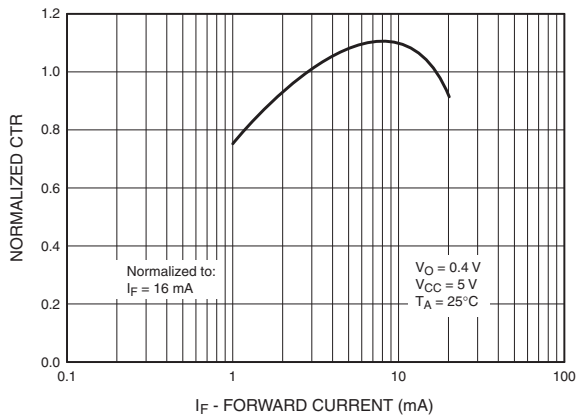


Fig. 2 Normalized CTR vs. Temperature

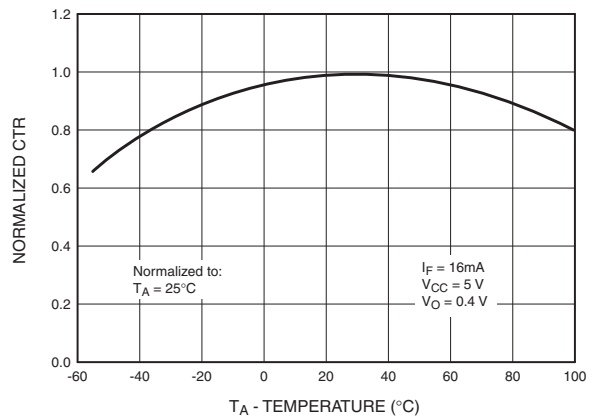


Fig. 3 Output Current vs. Output Voltage

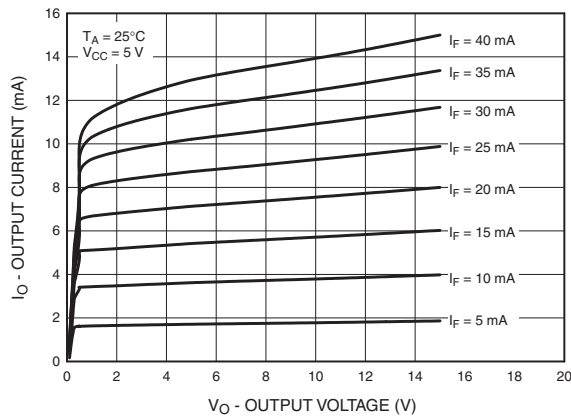


Fig. 4 Logic High Output Current vs. Temperature

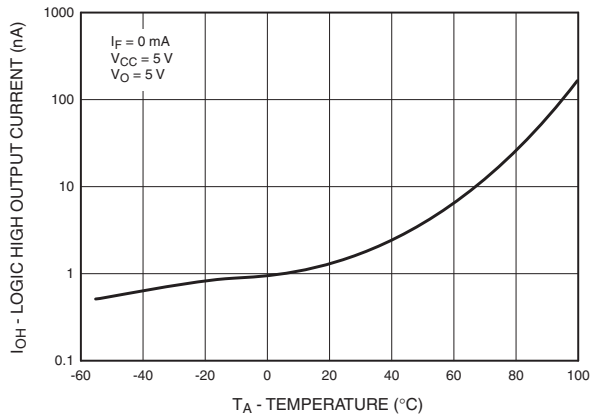


Fig. 5 Propagation Delay vs. Temperature


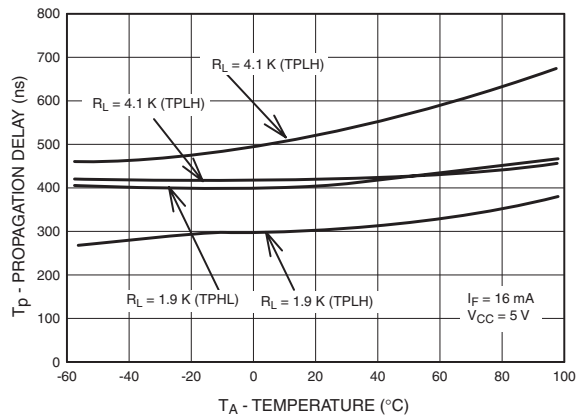


Fig. 6 Propagation Delay vs. Load Resistance

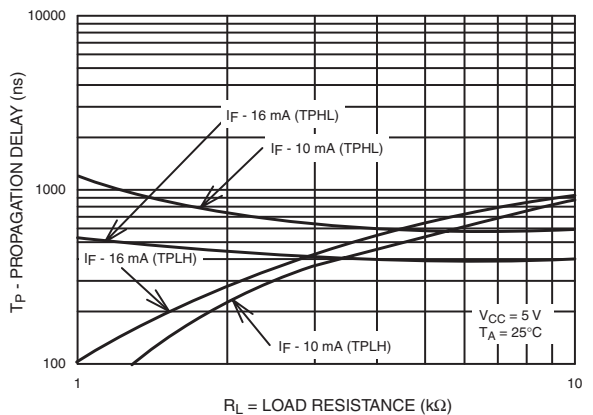


SINGLE-CHANNEL: 6N135
DUAL-CHANNEL: HCPL-2530


6N136
HCPL-2531

HCPL-2503

HCPL-4502

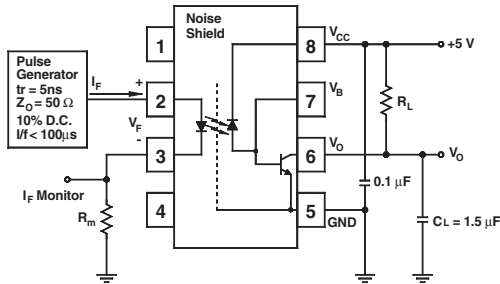

Test Circuit for 6N135, 6N136, HCPL-2503 and HCPL-4502

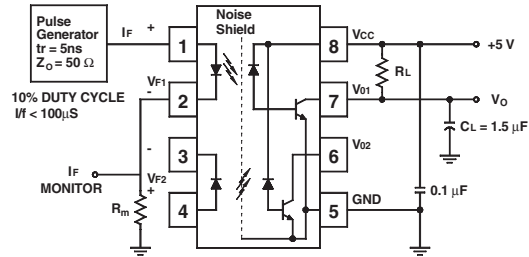

Test Circuit for HCPL-2530 and HCPL-2531



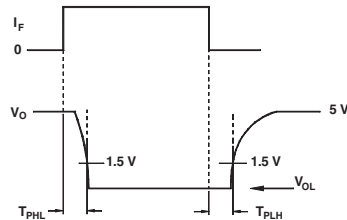


Fig. 7 Switching Time Test Circuit

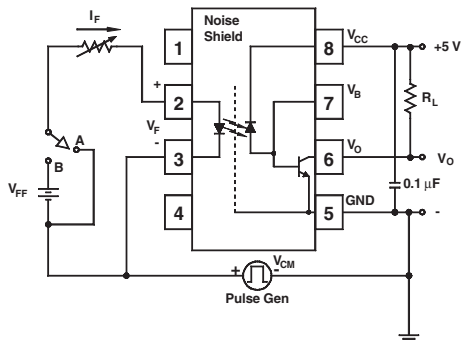

Test Circuit for 6N135, 6N136, HCPL-2503 and HCPL-4502

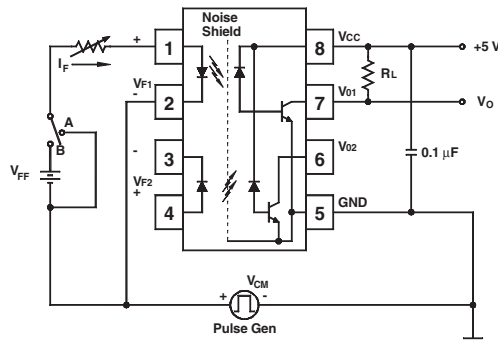

Test Circuit for HCPL-2530 and HCPL-2531

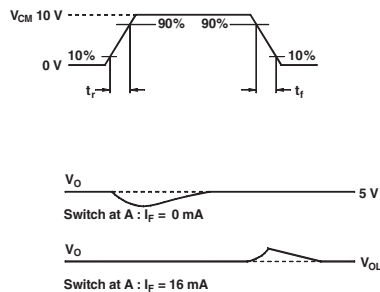


Fig. 8 Common Mode Immunity Test Circuit


SINGLE-CHANNEL: 6N135
DUAL-CHANNEL: HCPL-2530

6N136
HCPL-2531


HCPL-2503

HCPL-4502


Package Dimensions (Through Hole)

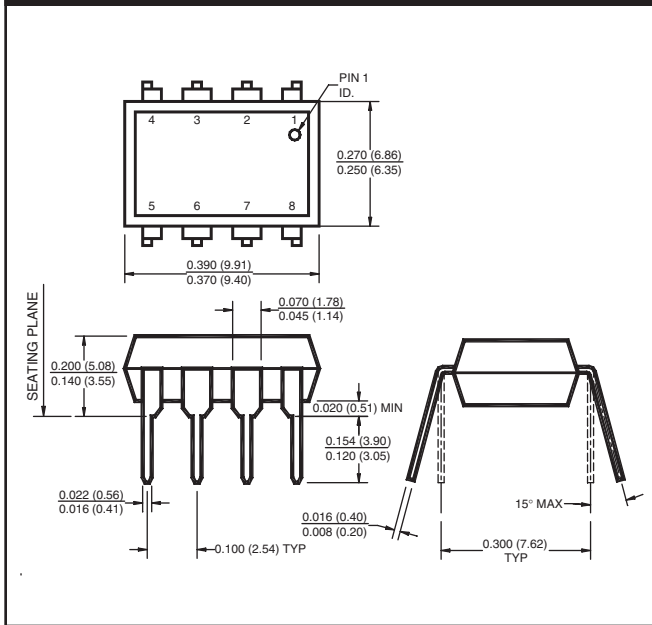

Package Dimensions (Surface Mount)

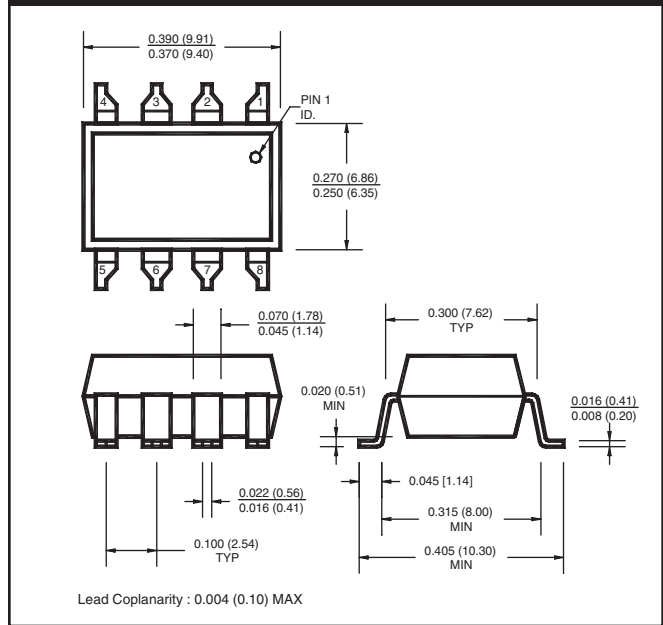

Package Dimensions (0.4" Lead Spacing)

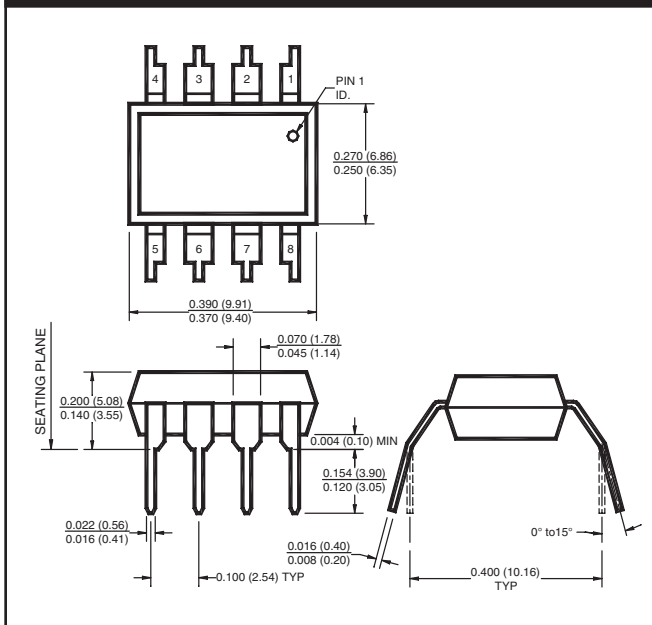

NOTE
All dimensions are in inches (millimeters)

SINGLE-CHANNEL: 6N135
DUAL-CHANNEL: HCPL-2530

6N136
HCPL-2531


HCPL-2503

HCPL-4502

ORDERING INFORMATION

| Option | Example Part Number | Description |
|--------|---------------------|---------------------------------------|
| S | 6N135S | Surface Mount Lead Bend |
| SD | 6N135SD | Surface Mount; Tape and reel |
| T | 6N135T | 0.4" Lead Spacing |
| V | 6N135V | VDE0884 |
| TV | 6N135TV | VDE0884; 0.4" lead spacing |
| SV | 6N135SV | VDE0884; surface mount |
| SDV | 6N135SDV | VDE0884; surface mount; tape and reel |

MARKING INFORMATION

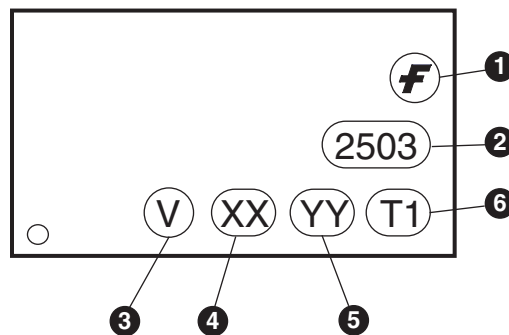

| Definitions | |
|-------------|--|
| 1 | Fairchild logo |
| 2 | Device number |
| 3 | VDE mark (Note: Only appears on parts ordered with VDE option – See order entry table) |
| 4 | Two digit year code, e.g., '03' |
| 5 | Two digit work week ranging from '01' to '53' |
| 6 | Assembly package code |


SINGLE-CHANNEL: 6N135
DUAL-CHANNEL: HCPL-2530

6N136
HCPL-2531


HCPL-2503

HCPL-4502

Carrier Tape Specifications

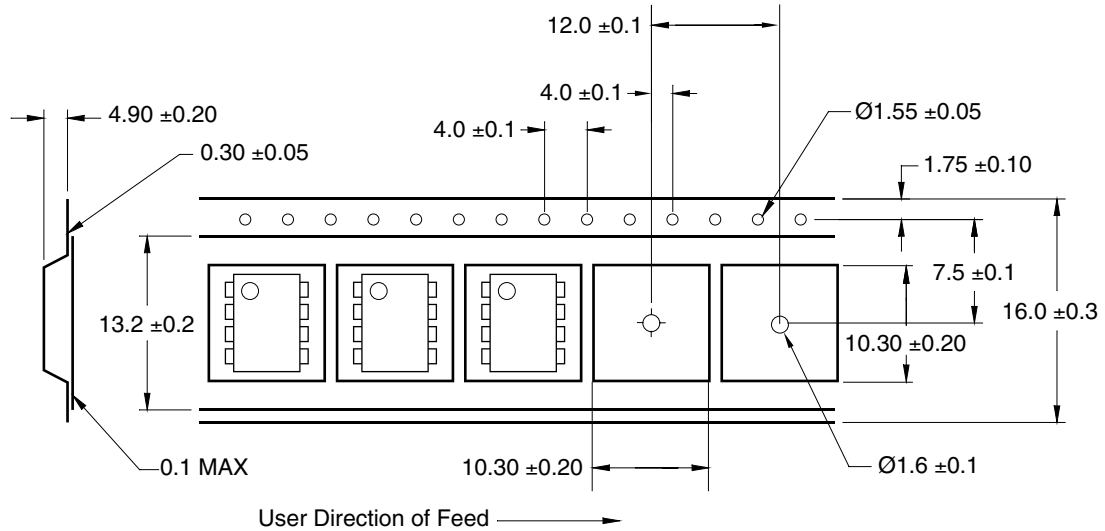

Reflow Profile

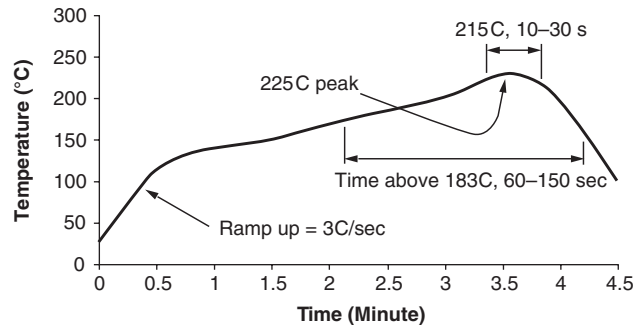

- Peak reflow temperature: 225C (package surface temperature)
- Time of temperature higher than 183C for 60–150 seconds
- One time soldering reflow is recommended

SINGLE-CHANNEL: 6N135
DUAL-CHANNEL: HCPL-2530

6N136
HCPL-2531

HCPL-2503

HCPL-4502

DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.



LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View 6N135WV on WIN SOURCE](#)
-  [Fairchild/ON Semiconductor Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management