



THE DATASHEET OF PS7141L-1C

8 PIN DIP 400 V BREAKDOWN VOLTAGE TRANSFER TYPE 2-CH OPTICAL COUPLED MOSFET

PS7141-1C
PS7141L-1C

FEATURES

- **2 CHANNEL TYPE:**
(1a + 1b output)
- **LOW LED OPERATING CURRENT:**
 $I_F = 2 \text{ mA}$
- **DESIGNED FOR AC/DC SWITCHING LINE CHANGER**
- **SMALL PACKAGE:**
8 pin DIP
- **LOW OFFSET VOLTAGE**
- **SURFACE MOUNT AVAILABLE:**
PS7141L-1C

DESCRIPTION

The PS7141-1C and PS7141L-1C are transfer type solid state relays containing normally open (N.O.) contacts and normally closed (N.C.) contacts on the output side. They are suitable for analog signal control because of their low offset and high linearity.

APPLICATIONS


- EXCHANGE EQUIPMENT
- MEASUREMENT EQUIPMENT
- FA/OA EQUIPMENT

ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$)


PART NUMBER					PS7141-1C, PS7141L-1C			
SYMBOLS		PARAMETERS		UNITS	MIN	TYP	MAX	
Diode	V _F	Forward Voltage, I _F = 10 mA		V		1.2	1.4	
	I _R	Reverse Current, V _R = 5 V		μA			5.0	
MOSFET	I _{OFF}	Off-State Leakage Current,	N.O.: I _F = 0 mA, V _D = 400 V N.C.: I _F = 10 mA, V _D = 400 V	μA		0.03	1.0	
	C _{out}	Output Capacitance,	N.O.: V _D = 0 V, f = 1 MHz N.C.: V _D = 0 V, f = 1 MHz, I _F = 10 mA	pF/ch		65 185		
Coupled	I _{Fon}	LED On-state Current,	N.O.: I _L = 150 mA	mA			2.0	
	I _{Foff}	LED Off-state Current,	N.C.: I _L = 150 mA				2.0	
	R _{ON1}	On-State Resistance,	N.O.: I _F = 10 mA, I _L = 10 mA	Ω		20	30	
			N.C.: I _F = 0 mA, I _L = 10 mA			24	30	
	R _{ON2}		N.O.: I _F = 10 mA, I _L = 150 mA, t≤10 ms			16	25	
			N.C.: I _F = 0 mA, I _L = 150 mA, t≤10 ms			16	25	
	t _{ON} (N.O.)	Turn-on Time ¹	I _F = 10 mA, V _O = 5 V, P _W ≥ 10 ms	ms		0.33	1.0	
	t _{ON} (N.C.)					0.02	0.2	
	t _{OFF} (N.O.)	Turn-off Time ¹				0.03	0.2	
	t _{OFF} (N.C.)					0.20	1.0	
	R _{I-O}	Isolation Resistance, V _{I-O} = 1.0 kV _{DC}		Ω	10 ⁹			
	C _{I-O}	Isolation Capacitance, V = 0 V, f = 1 MHz		pF/ch		1.1		

Notes:


1. Test Circuit Switching Time:

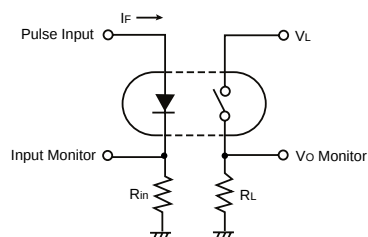


N.O. (between pin 5 and 6)



N.C. (between pin 7 and 8)



PS7141-1C, PS7141L-1C



PS7141-1C, PS7141L-1C

ABSOLUTE MAXIMUM RATINGS¹ (T_A = 25°C)


SYMBOLS	PARAMETERS	UNITS	RATINGS
Diode			
I _F	Forward Current (DC)	mA	50
V _R	Reverse Voltage	V	5.0
P _D	Power Dissipation	mW/ch	50
I _{FP}	Peak Foward Current ²	A	1
MOSFET			
V _L	Break Down Voltage	V	400
I _L	Continuous Load Current	mA	150
I _{LP}	Pulse Load Current ³ AC/DC Connection	mA	300
P _D	Power Dissipation	mW/ch	375
BV	Isolation Voltage ⁴	Vr.m.s.	1500
P _T	Total Power Dissipation	mW	850
T _A	Operating Ambient Temp.	°C	-40 to +80
T _{STG}	Storage Temperature	°C	-40 to +100

Notes:


1. Operation in excess of any one of these parameters may result in permanent damage.
2. PW = 100 μs, Duty Cycle = 1 %.
3. PW = 100 ms, 1 shot.
4. AC voltage for 1 minute at T_A = 25 °C, RH = 60 % between input and output.

OUTLINE DIMENSIONS (Units in mm)

PS7141-1C

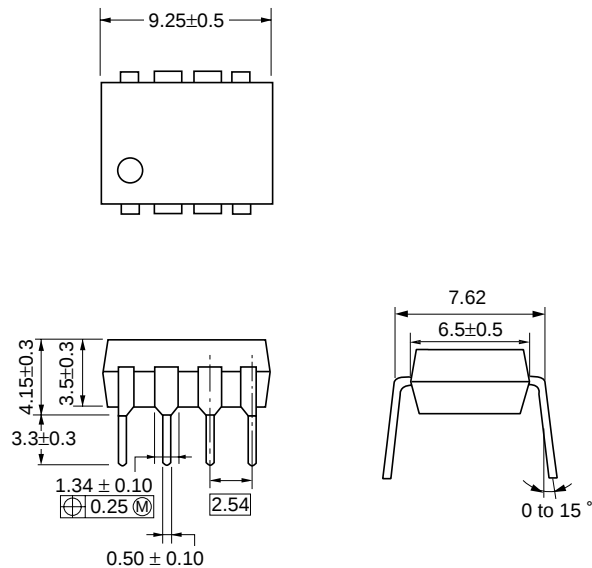


PS7141L-1C

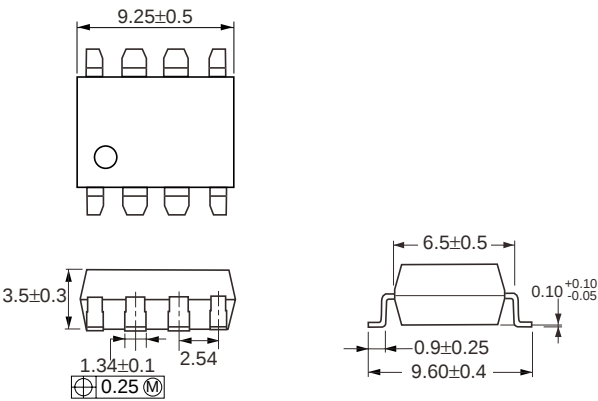

PIN CONNECTION (Top View)

PS7141-1C, PS7141L-1C



1. LED Anode (N.C.)
2. LED Cathode (N.C.)
3. LED Anode (N.O.)
4. LED Cathode (N.O.)
5. MOSFET (N.O.)
6. MOSFET (N.O.)
7. MOSFET (N.C.)
8. MOSFET (N.C.)

RECOMMENDED
OPERATING CONDITIONS (T_A = 25°C)


PART NUMBER		PS7141-1C,PS7141L-1C			
SYMBOLS	PARAMETERS	UNITS	MIN	TYP	MAX
I _F	LED Operating Current	mA	2	10	20
V _F	LED Off Voltage	V	0		0.5

ORDERING INFORMATION


PART NUMBER	PACKAGE	PACKING STYLE
PS7141-1C	8-PIN DIP	Magazine case 50 pcs
PS7141L-1C		
PS7141L-1C-E3		Embossed Tape 1000 pcs/reel
PS7141L-1C-E4		

TYPICAL PERFORMANCE CURVES ($T_A = 25\text{ }^{\circ}\text{C}$)


**MAX FORWARD CURRENT
vs. AMBIENT TEMPERATURE**

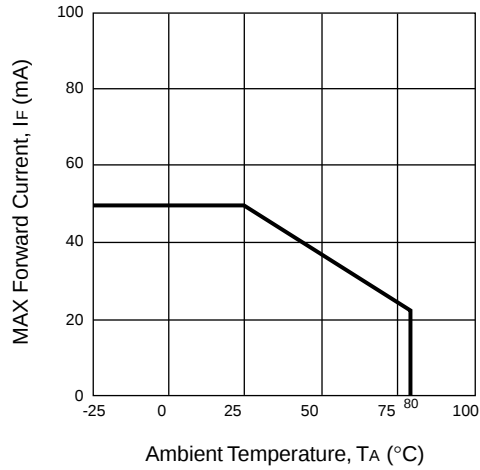


**MAX LOAD CURRENT
vs. AMBIENT TEMPERATURE**

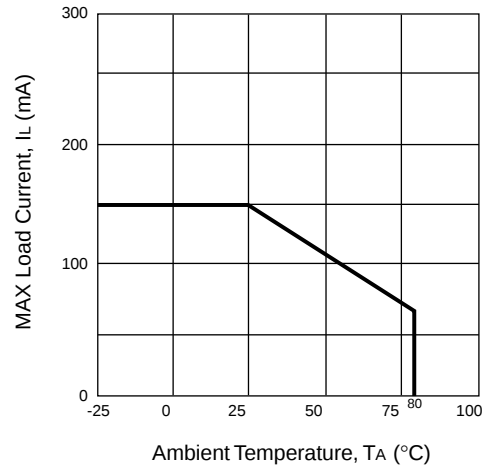


**FORWARD VOLTAGE vs.
AMBIENT TEMPERATURE**

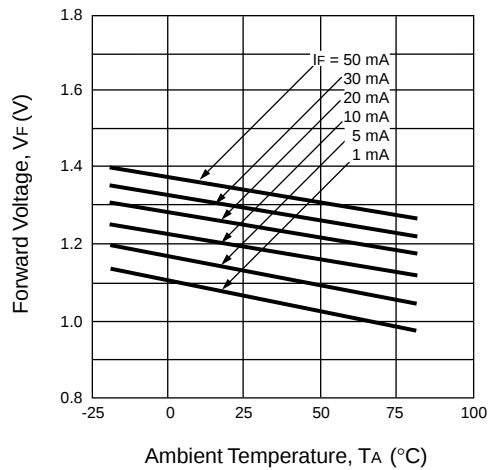


**OUTPUT CAPACITANCE
vs. APPLIED VOLTAGE**

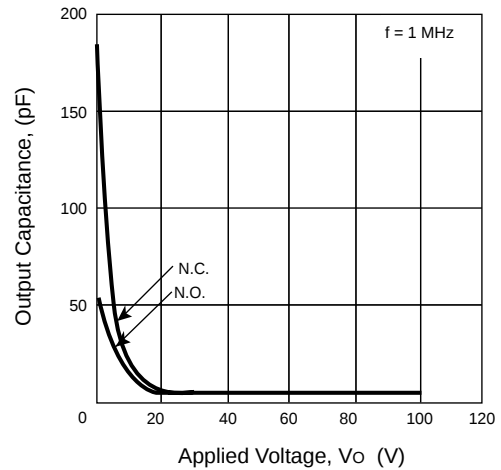






**OFF-STATE LEAKAGE CURRENT
vs. APPLIED VOLTAGE**






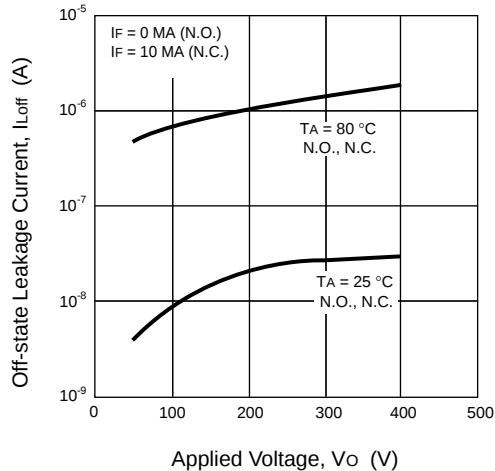


**LOAD CURRENT vs.
LOAD VOLTAGE**

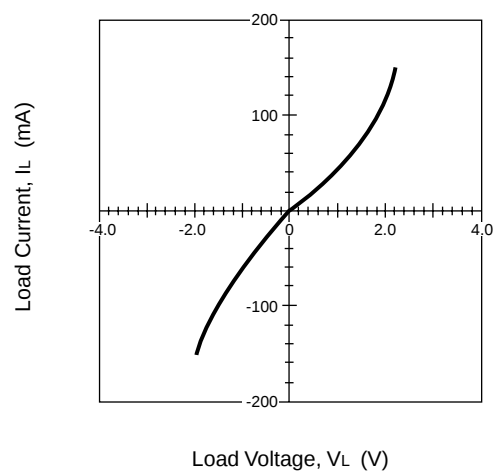


TYPICAL PERFORMANCE CURVES (T_A = 25 °C)

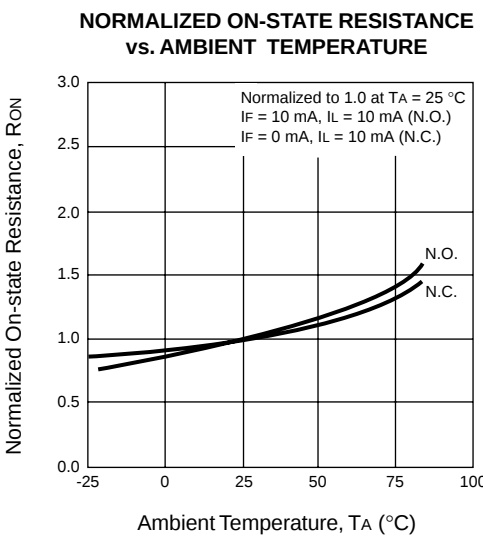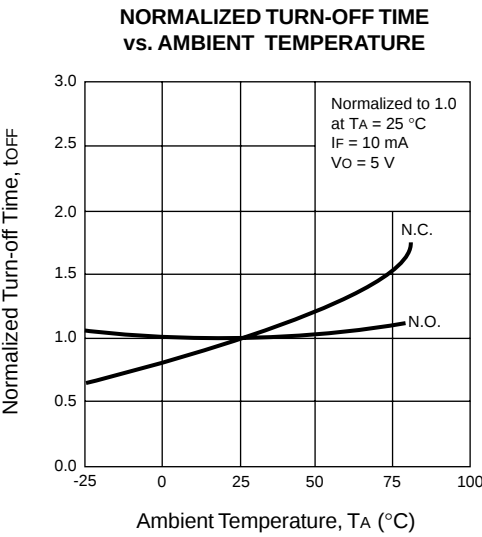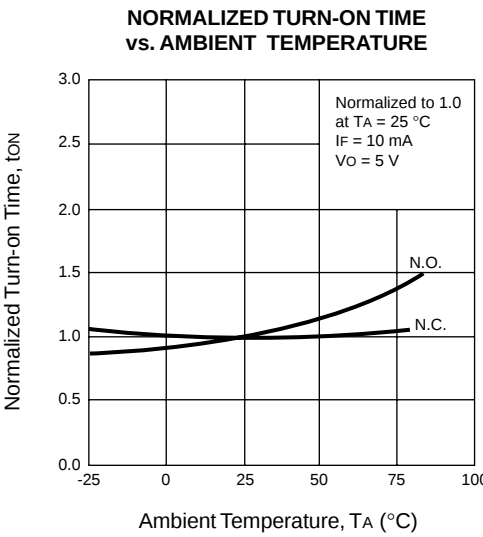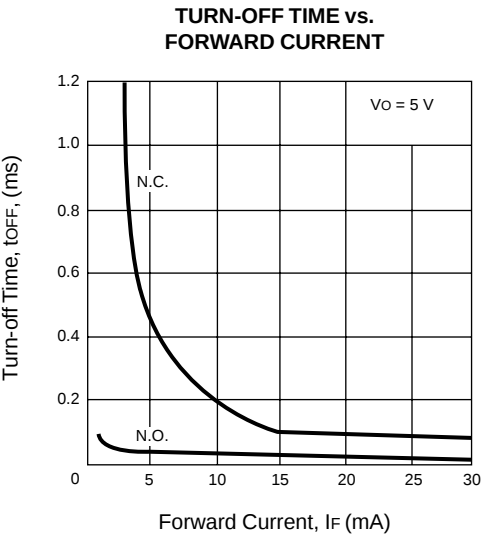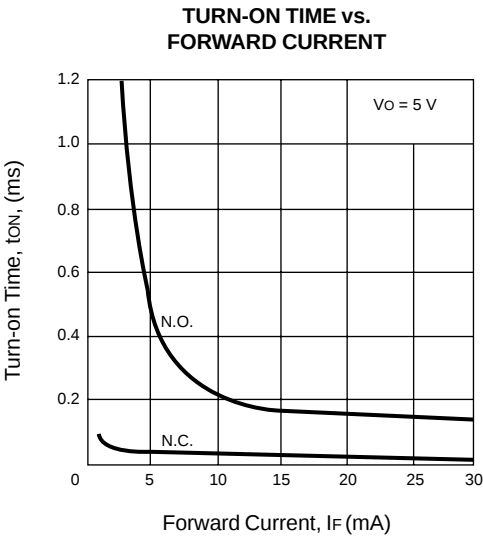

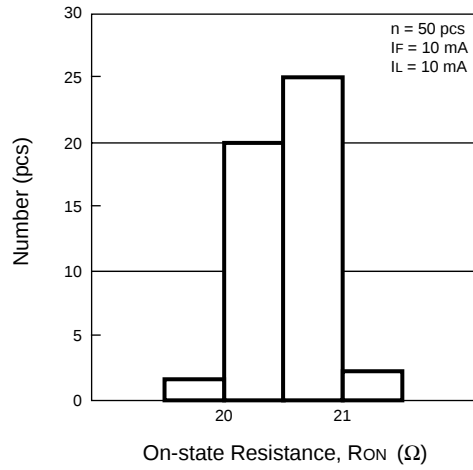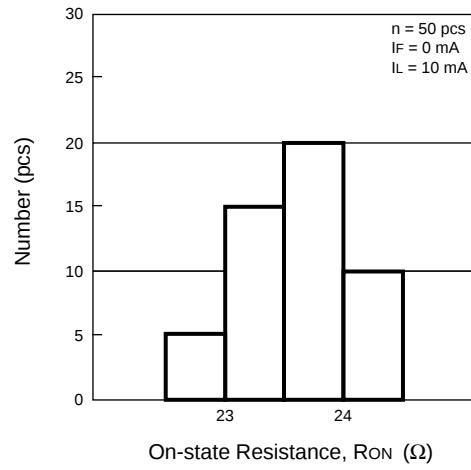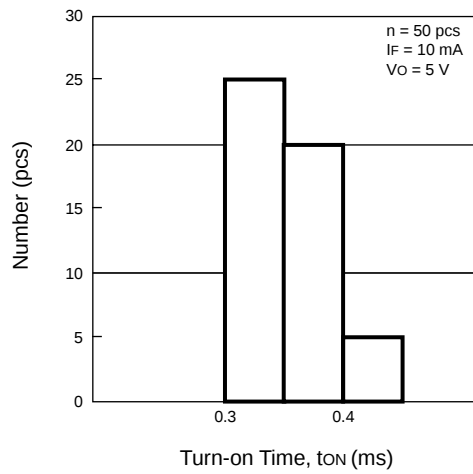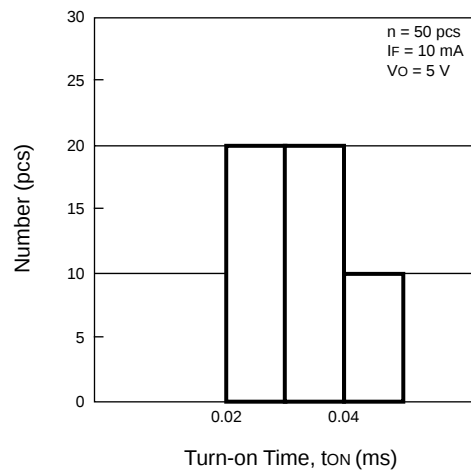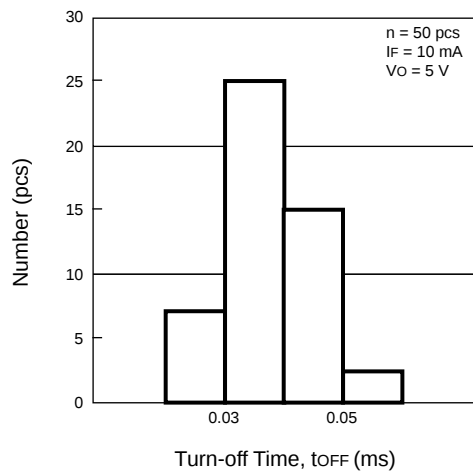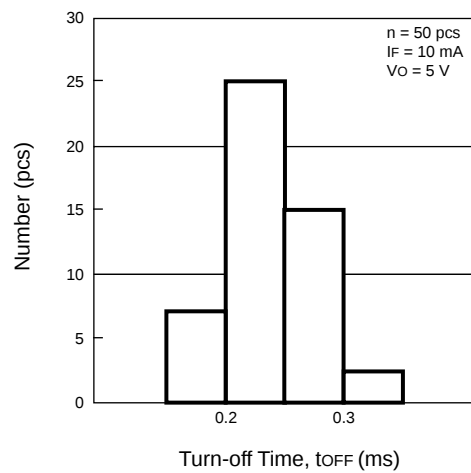
TYPICAL PERFORMANCE CURVES ($T_A = 25\text{ }^{\circ}\text{C}$)**ON-STATE RESISTANCE (N.O.)
DISTRIBUTION****ON-STATE RESISTANCE (N.C.)
DISTRIBUTION****TURN-ON TIME (N.O.) DISTRIBUTION****TURN-ON TIME (N.C.) DISTRIBUTION****TURN-OFF TIME (N.O.) DISTRIBUTION****TURN-OFF TIME (N.C.) DISTRIBUTION**

TAPING SPECIFICATIONS (Units in mm)

OUTLINE AND DIMENSIONS (TAPE)

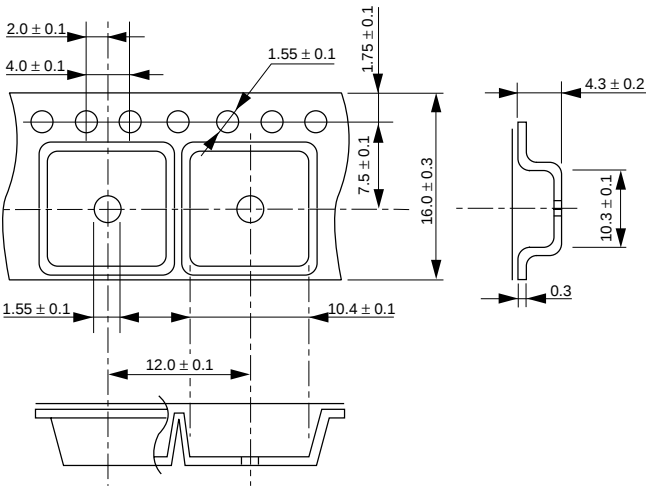

OUTLINE AND DIMENSIONS (REEL)

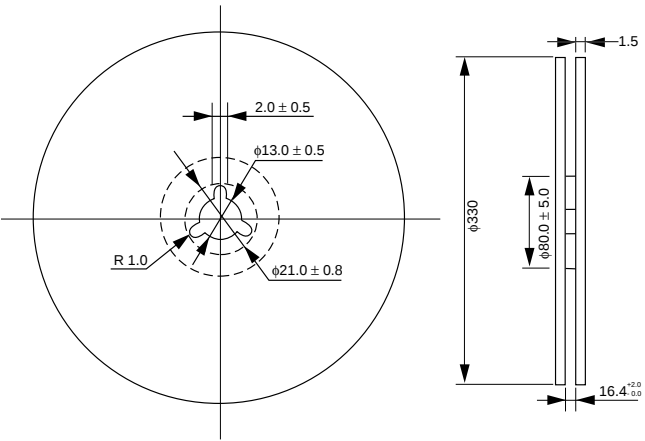


Packaging : 1000 pcs/reel

TAPING DIRECTION

PS7141L-1C-E3

PS7141L-1C-E4

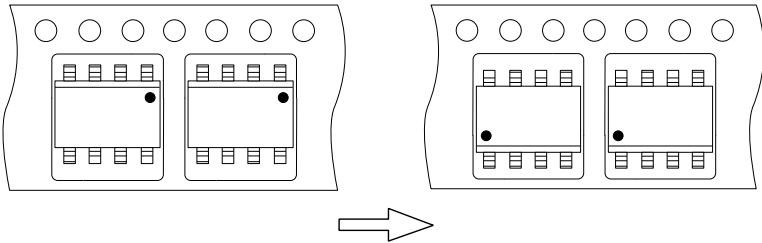


RECOMMENDED SOLDERING CONDITIONS

(1) Infrared reflow soldering

- Peak reflow temperature 235 °C or below (package surface temperature)
- Time of temperature higher than 210 °C 30 seconds or less
- Number of reflows Two
- Flux Rosin flux containing small amount of chlorine
(The flux with a maximum chlorine content of 0.2 Wt % is recommended.)

Recommended Temperature Profile of Infrared Reflow

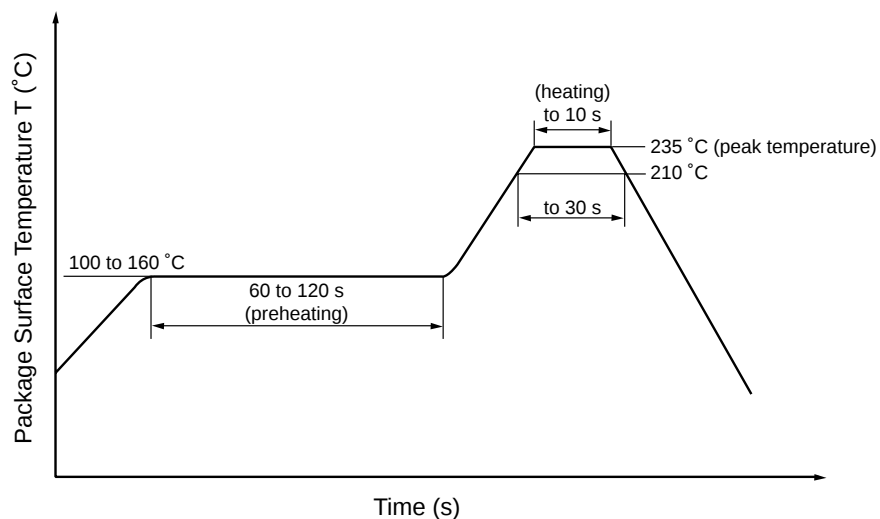

(2) Dip soldering

- Temperature 260 °C or below (molten solder temperature)
- Time 10 seconds or less
- Number of times One
- Flux Rosin flux containing small amount of chlorine
(The flux with a maximum chlorine content of 0.2 Wt % is recommended.)

(3) Cautions

- Fluxes
Avoid removing the residual flux with freon-based cleaning solvent.

EXCLUSIVE NORTH AMERICAN AGENT FOR NEC RF, MICROWAVE & OPTOELECTRONIC SEMICONDUCTORS

CEL CALIFORNIA EASTERN LABORATORIES • Headquarters • 4590 Patrick Henry Drive • Santa Clara, CA 95054-1817 • (408) 988-3500 • Telex 34-6393 • FAX (408) 988-0279

DATA SUBJECT TO CHANGE WITHOUT NOTICE

Internet: <http://WWW.CEL.COM>

10/11/2001

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View PS7141L-1C on WIN SOURCE](#)

 [CEL Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management