



**THE DATASHEET OF  
NE68819-T1-A**



### FEATURES

- **LOW PHASE NOISE DISTORTION**
- **LOW NOISE:** 1.5 dB at 2.0 GHz
- **LOW VOLTAGE OPERATION**
- **LARGE ABSOLUTE MAXIMUM COLLECTOR CURRENT:**  $I_C$  MAX = 100 mA
- **AVAILABLE IN SIX LOW COST PLASTIC SURFACE MOUNT PACKAGE STYLES**
- **ALSO AVAILABLE IN CHIP FORM**

### DESCRIPTION

NEC's NE688 series of NPN epitaxial silicon transistors are designed for low cost amplifier and oscillator applications. Low noise figures, high gain and high current capability equate to wide dynamic range and excellent linearity. NE688's low phase noise distortion and high  $f_T$  make it an excellent choice for oscillator applications up to 5 GHz. The NE688 series is available in six different low cost plastic surface mount package styles, and in chip form.



### ELECTRICAL CHARACTERISTICS (TA = 25°C)

| SYMBOLS                         | PARAMETERS AND CONDITIONS                                       | UNITS | PART NUMBER <sup>1</sup><br>EIAJ <sup>2</sup> REGISTERED NUMBER<br>PACKAGE OUTLINE |      |     | NE68818<br>2SC5194<br>18 |     |      | NE68819<br>2SC5195<br>19 |      |      | NE68830<br>2SC5193<br>30 |      |      | NE68833<br>2SC5191<br>33 |      |     | NE68839/39R<br>2SC5192/92R<br>39 |  |  |
|---------------------------------|---|-------|--|------|-----|--------------------------|-----|------|--------------------------|------|------|--------------------------|------|------|--------------------------|------|-----|----------------------------------|--|--|
|                                 |   |       | MIN  | TYP  | MAX | MIN                      | TYP | MAX  | MIN                      | TYP  | MAX  | MIN                      | TYP  | MAX  | MIN                      | TYP  | MAX |                                  |  |  |
| $f_T$                           | Gain Bandwidth Product at $V_{CE} = 1V, I_C = 3mA, f = 2.0GHz$  | GHz   | 4  | 5    |     | 4.5                      | 5   |      | 4                        | 4.5  |      | 4                        | 4.5  |      | 4                        | 4.5  |     |                                  |  |  |
| $f_T$                           | Gain Bandwidth Product at $V_{CE} = 3V, I_C = 20mA, f = 2.0GHz$ | GHz   |  | 10   |     |                          | 9.5 |      |                          | 9    |      |                          | 8.5  |      |                          | 9    |     |                                  |  |  |
| NF <sub>MIN</sub>               | Minimum Noise Figure at $V_{CE} = 1V, I_C = 3mA, f = 2.0GHz$    | dB    |  | 1.7  | 2.5 |                          | 1.7 | 2.5  |                          | 1.7  | 2.5  |                          | 1.7  | 2.5  |                          | 1.7  | 2.5 |                                  |  |  |
| NF <sub>MIN</sub>               | Minimum Noise Figure at $V_{CE} = 3V, I_C = 7mA, f = 2.0GHz$    | dB    |  | 1.5  |     |                          | 1.5 |      |                          | 1.5  |      |                          | 1.5  |      |                          | 1.5  |     |                                  |  |  |
| IS <sub>21E1</sub> <sup>2</sup> | Insertion Power Gain at $V_{CE} = 1V, I_C = 3mA, f = 2.0GHz$    | dB    | 3.0  | 4.0  |     | 3.0                      | 4.0 |      | 2.5                      | 3.5  |      | 2.5                      | 3.5  |      | 4.0                      | 4.5  |     |                                  |  |  |
| IS <sub>21E2</sub> <sup>2</sup> | Insertion Power Gain at $V_{CE} = 3V, I_C = 20mA, f = 2.0GHz$   | dB    |  | 8.5  |     |                          | 8   |      |                          | 6.5  |      |                          | 6.5  |      |                          | 9    |     |                                  |  |  |
| h <sub>FE</sub>                 | Forward Current Gain <sup>3</sup> at $V_{CE} = 1V, I_C = 3mA$   |       | 80   |      | 160 | 80                       |     | 160  | 80                       |      | 160  | 80                       |      | 160  | 80                       |      | 160 |                                  |  |  |
| I <sub>CBO</sub>                | Collector Cutoff Current at $V_{CB} = 5V, I_E = 0mA$            | nA    |  |      | 100 |                          |     | 100  |                          |      | 100  |                          |      | 100  |                          |      | 100 |                                  |  |  |
| I <sub>EBO</sub>                | Emitter Cutoff Current at $V_{EB} = 1V, I_C = 0mA$              | nA    |  |      | 100 |                          |     | 100  |                          |      | 100  |                          |      | 100  |                          |      | 100 |                                  |  |  |
| C <sub>RE</sub> <sup>4</sup>    | Feedback Capacitance at $V_{CB} = 1V, I_E = 0mA, f = 1MHz$      | pF    |  | 0.65 | 0.8 |                          | 0.7 | 0.8  |                          | 0.75 | 0.85 |                          | 0.75 | 0.85 |                          | 0.65 | 0.8 |                                  |  |  |
| P <sub>T</sub>                  | Total Power Dissipation   | mW    |  |      | 150 |                          |     | 125  |                          |      | 150  |                          |      | 200  |                          |      | 200 |                                  |  |  |
| R <sub>TH(J-A)</sub>            | Thermal Resistance (Junction to Ambient)                        | °C/W  |  |      | 833 |                          |     | 1000 |                          |      | 833  |                          |      | 625  |                          |      | 625 |                                  |  |  |
| R <sub>TH(J-C)</sub>            | Thermal Resistance (Junction to Case)                           | °C/W  |  |      |     |                          |     |      |                          |      |      |                          |      |      |                          |      |     |                                  |  |  |

Notes:

1. Precaution: Devices are ESD sensitive. Use proper handling procedures.
2. Electronic Industrial Association of Japan.

3. Pulsed measurement,  $PW \leq 350 \mu s$ , duty cycle  $\leq 2\%$ .

4. The emitter terminal should be connected to the ground terminal of the 3 terminal capacitance bridge.

# NE688 SERIES

## ABSOLUTE MAXIMUM RATINGS<sup>1</sup> ( $T_A = 25^\circ\text{C}$ )


| SYMBOLS          | PARAMETERS                     | UNITS | RATINGS     |
|------------------|--------------------------------|-------|-------------|
| V <sub>CB0</sub> | Collector to Base Voltage      | V     | 9           |
| V <sub>CE0</sub> | Collector to Emitter Voltage   | V     | 6           |
| V <sub>EB0</sub> | Emitter to Base Voltage        | V     | 2.0         |
| I <sub>C</sub>   | Collector Current              | mA    | 100         |
| T <sub>J</sub>   | Operating Junction Temperature | °C    | 150         |
| T <sub>STG</sub> | Storage Temperature            | °C    | -65 to +150 |

Notes:


1. Operation in excess of any one of these parameters may result in permanent damage.

## TYPICAL PERFORMANCE CURVES ( $T_A = 25^\circ\text{C}$ )


**NE68818, NE68830**  
D.C. POWER DERATING CURVE

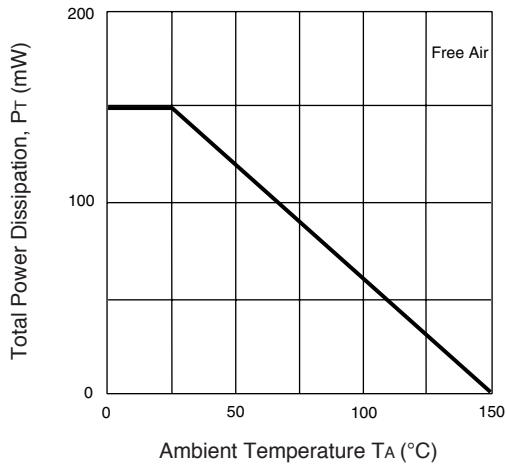


**NE68819**  
D.C. POWER DERATING CURVE

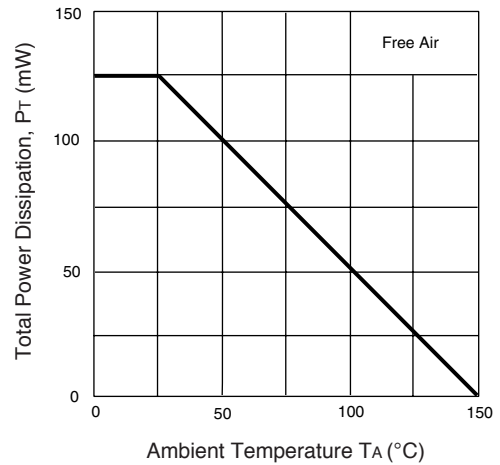

**NE68833, NE68839**  
D.C. POWER DERATING CURVE

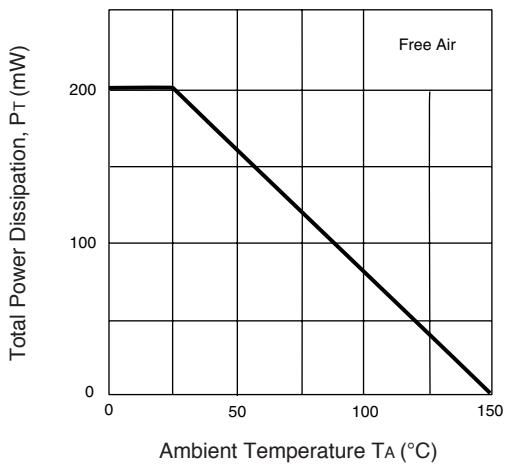


**COLLECTOR CURRENT vs. COLLECTOR TO EMITTER VOLTAGE**

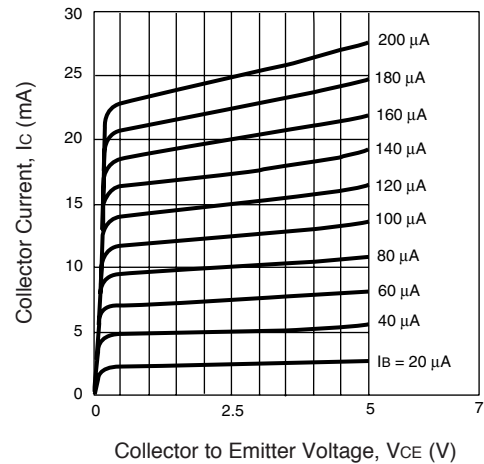


TYPICAL PERFORMANCE CURVES (TA = 25°C)


NE68833  
INSERTION GAIN vs. COLLECTOR CURRENT

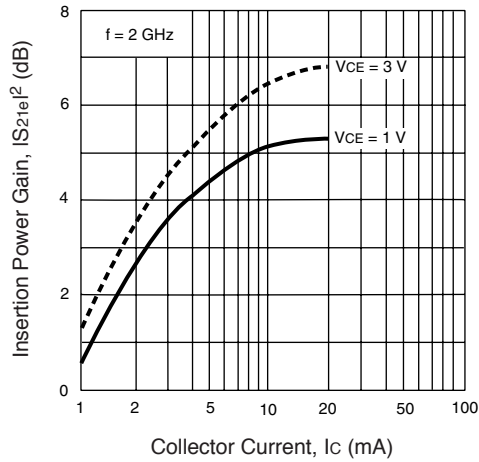


NE68833  
NOISE FIGURE vs. COLLECTOR CURRENT

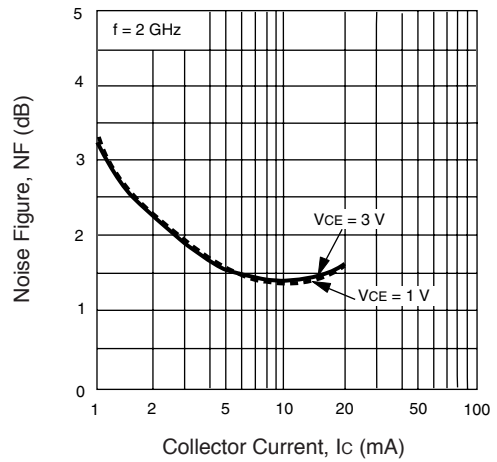


D.C. CURRENT GAIN vs. COLLECTOR CURRENT

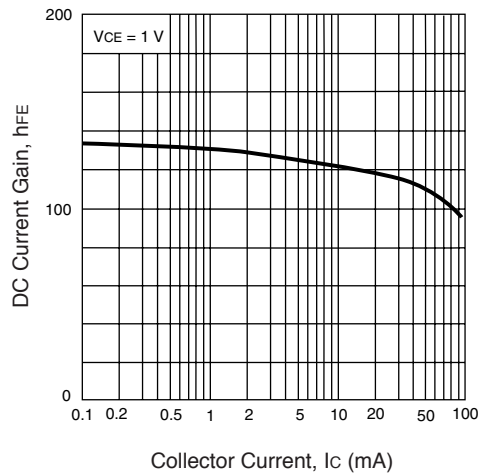


NE68839  
GAIN BANDWIDTH PRODUCT vs. COLLECTOR CURRENT

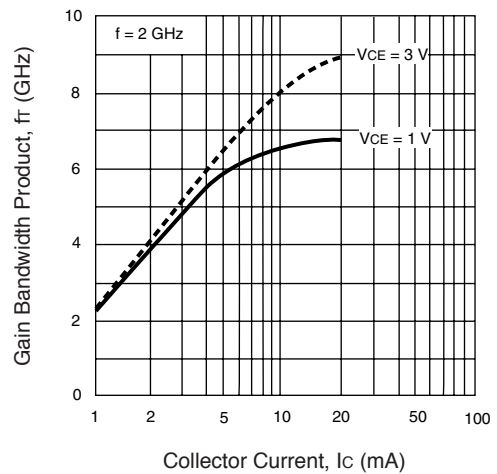

COLLECTOR CURRENT vs. BASE TO EMITTER VOLTAGE

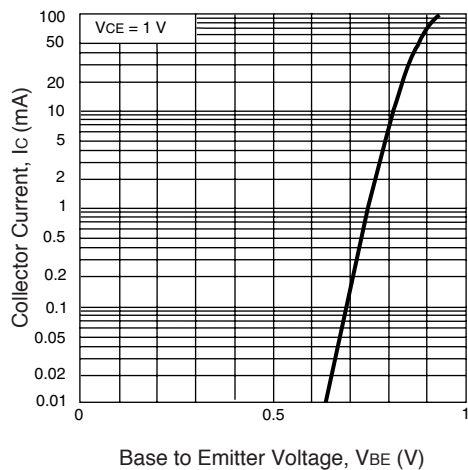


NE68830  
FEED-BACK CAPACITANCE vs. COLLECTOR TO BASE VOLTAGE

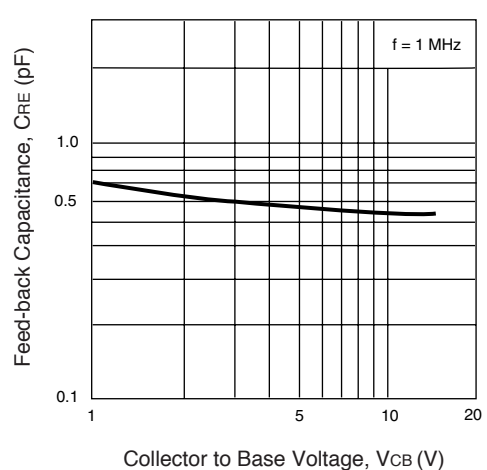


# NE688 SERIES

## TYPICAL SCATTERING PARAMETERS (TA = 25°C)

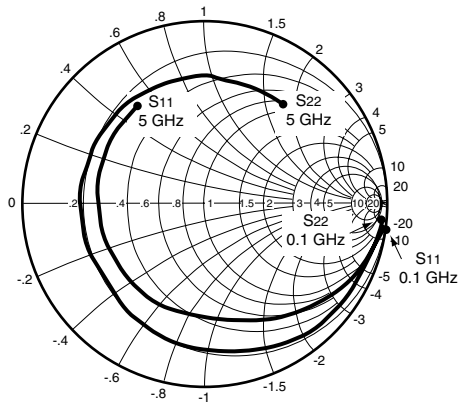

Coordinates in Ohms  
Frequency in GHz  
(VCE = 0.5 V, IC = 0.5 mA)

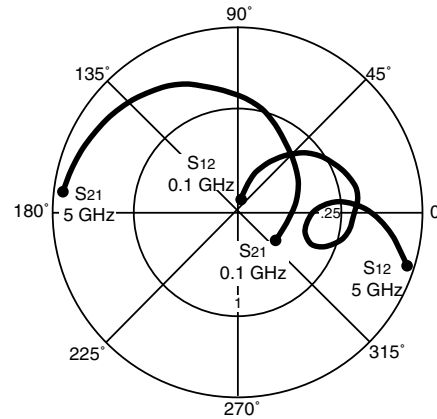

### NE68819

VCE = 0.5 V, IC = 0.5 mA

| FREQUENCY<br>GHz | S11   |          | S21   |         | S12   |         | S22   |          | K     | MAG <sup>1</sup><br>(dB) |
|------------------|-------|----------|-------|---------|-------|---------|-------|----------|-------|--------------------------|
|                  | MAG   | ANG      | MAG   | ANG     | MAG   | ANG     | MAG   | ANG      |       |                          |
| 0.1              | 0.976 | -16.300  | 1.892 | 164.300 | 0.061 | 77.700  | 0.990 | -9.700   | 0.096 | 14.916                   |
| 0.4              | 0.890 | -62.900  | 1.635 | 125.300 | 0.203 | 47.300  | 0.892 | -34.600  | 0.229 | 9.060                    |
| 0.8              | 0.764 | -108.300 | 1.250 | 86.900  | 0.283 | 18.500  | 0.757 | -56.300  | 0.428 | 6.451                    |
| 1.0              | 0.726 | -125.500 | 1.098 | 72.100  | 0.294 | 8.100   | 0.716 | -64.300  | 0.518 | 5.723                    |
| 1.5              | 0.691 | -159.300 | 0.859 | 43.500  | 0.276 | -10.800 | 0.654 | -81.500  | 0.722 | 4.931                    |
| 2.0              | 0.685 | 174.200  | 0.715 | 22.600  | 0.233 | -21.800 | 0.626 | -97.700  | 0.946 | 4.870                    |
| 2.5              | 0.689 | 150.800  | 0.618 | 6.500   | 0.184 | -23.000 | 0.607 | -115.400 | 1.257 | 2.208                    |
| 3.0              | 0.693 | 129.200  | 0.554 | -5.300  | 0.159 | -8.700  | 0.592 | -136.300 | 1.553 | 1.042                    |

VCE = 1.0 V, IC = 1.0 mA

|     |       |          |       |         |       |         |       |          |       |        |
|-----|-------|----------|-------|---------|-------|---------|-------|----------|-------|--------|
| 0.1 | 0.955 | -18.200  | 3.606 | 164.000 | 0.047 | 77.800  | 0.985 | -10.600  | 0.083 | 18.849 |
| 0.4 | 0.846 | -68.100  | 2.975 | 127.000 | 0.153 | 47.200  | 0.851 | -37.000  | 0.197 | 12.888 |
| 0.8 | 0.705 | -114.900 | 2.125 | 92.400  | 0.205 | 21.600  | 0.685 | -58.000  | 0.384 | 10.156 |
| 1.0 | 0.666 | -132.000 | 1.825 | 79.400  | 0.210 | 13.300  | 0.636 | -65.100  | 0.480 | 9.390  |
| 1.5 | 0.624 | -165.000 | 1.363 | 53.900  | 0.200 | 0.700   | 0.565 | -79.600  | 0.727 | 8.335  |
| 2.0 | 0.612 | 169.600  | 1.102 | 34.300  | 0.181 | -3.100  | 0.529 | -92.900  | 1.002 | 7.576  |
| 2.5 | 0.610 | 147.400  | 0.948 | 17.600  | 0.171 | 1.400   | 0.503 | -107.600 | 1.241 | 4.481  |
| 3.0 | 0.612 | 127.000  | 0.850 | 3.100   | 0.189 | 9.500   | 0.478 | -125.400 | 1.295 | 3.271  |
| 4.0 | 0.633 | 87.700   | 0.731 | -22.000 | 0.312 | 7.300   | 0.464 | -175.100 | 1.058 | 2.229  |
| 5.0 | 0.660 | 50.700   | 0.634 | -42.500 | 0.434 | -14.500 | 0.542 | 135.800  | 1.022 | 0.747  |

VCE = 3.0 V, IC = 3.0 mA

|     |       |          |       |         |       |         |       |          |       |        |
|-----|-------|----------|-------|---------|-------|---------|-------|----------|-------|--------|
| 0.1 | 0.902 | -25.000  | 9.548 | 160.300 | 0.035 | 75.900  | 0.964 | -15.500  | 0.085 | 24.358 |
| 0.4 | 0.706 | -86.100  | 6.729 | 119.100 | 0.098 | 44.700  | 0.708 | -47.700  | 0.288 | 18.367 |
| 0.8 | 0.558 | -133.100 | 4.185 | 89.200  | 0.123 | 29.300  | 0.500 | -66.200  | 0.552 | 15.318 |
| 1.0 | 0.528 | -148.700 | 3.477 | 78.800  | 0.129 | 26.300  | 0.448 | -71.400  | 0.673 | 14.306 |
| 1.5 | 0.496 | -177.500 | 2.465 | 57.900  | 0.143 | 23.100  | 0.383 | -80.700  | 0.911 | 12.365 |
| 2.0 | 0.484 | 161.200  | 1.924 | 40.800  | 0.162 | 22.300  | 0.349 | -89.300  | 1.068 | 9.158  |
| 2.5 | 0.480 | 142.700  | 1.613 | 25.100  | 0.189 | 21.100  | 0.324 | -98.900  | 1.127 | 7.147  |
| 3.0 | 0.485 | 125.800  | 1.425 | 10.500  | 0.224 | 17.800  | 0.295 | -112.300 | 1.115 | 5.973  |
| 4.0 | 0.518 | 91.200   | 1.187 | -17.200 | 0.313 | 4.600   | 0.256 | -159.100 | 1.030 | 4.721  |
| 5.0 | 0.579 | 56.600   | 0.985 | -43.600 | 0.396 | -14.900 | 0.342 | 147.600  | 0.973 | 3.957  |

VCE = 3.0 V, IC = 7.0 mA

|     |       |          |        |         |       |         |       |          |       |        |
|-----|-------|----------|--------|---------|-------|---------|-------|----------|-------|--------|
| 0.1 | 0.786 | -39.600  | 18.403 | 151.700 | 0.031 | 72.000  | 0.903 | -25.500  | 0.118 | 27.735 |
| 0.4 | 0.542 | -113.500 | 9.834  | 106.700 | 0.073 | 44.700  | 0.506 | -65.400  | 0.487 | 21.294 |
| 0.8 | 0.450 | -156.200 | 5.452  | 82.100  | 0.097 | 40.800  | 0.320 | -82.200  | 0.797 | 17.498 |
| 1.0 | 0.434 | -169.300 | 4.445  | 73.700  | 0.109 | 40.500  | 0.281 | -86.600  | 0.894 | 16.104 |
| 1.5 | 0.420 | 167.100  | 3.072  | 55.700  | 0.143 | 38.100  | 0.231 | -93.200  | 1.016 | 12.550 |
| 2.0 | 0.411 | 149.700  | 2.376  | 40.500  | 0.180 | 33.900  | 0.203 | -99.000  | 1.069 | 9.601  |
| 2.5 | 0.410 | 134.000  | 1.974  | 25.900  | 0.220 | 27.700  | 0.179 | -106.000 | 1.078 | 7.824  |
| 3.0 | 0.413 | 120.000  | 1.726  | 12.000  | 0.262 | 19.900  | 0.154 | -119.300 | 1.067 | 6.606  |
| 4.0 | 0.460 | 89.000   | 1.412  | -14.800 | 0.347 | 1.500   | 0.137 | 177.100  | 1.024 | 5.143  |
| 5.0 | 0.533 | 54.800   | 1.176  | -40.600 | 0.413 | -18.700 | 0.255 | 127.900  | 0.996 | 4.545  |

Note:

1. Gain Calculations:

$$MAG = \frac{|S_{21}|}{|S_{12}|} (K \pm \sqrt{K^2 - 1}). \text{ When } K \leq 1, \text{ MAG is undefined and MSG values are used. } MSG = \frac{|S_{21}|}{|S_{12}|}, K = \frac{1 + |\Delta|^2 - |S_{11}|^2 - |S_{22}|^2}{2 |S_{12} S_{21}|}, \Delta = S_{11} S_{22} - S_{21} S_{12}$$

MAG = Maximum Available Gain

MSG = Maximum Stable Gain

## TYPICAL SCATTERING PARAMETERS (T<sub>A</sub> = 25°C)

### NE68819

V<sub>CE</sub> = 3.0 V, I<sub>c</sub> = 20 mA

| FREQUENCY<br>GHz | S <sub>11</sub> |          | S <sub>21</sub> |         | S <sub>12</sub> |         | S <sub>22</sub> |          | K     | MAG <sup>1</sup><br>(dB) |
|------------------|-----------------|----------|-----------------|---------|-----------------|---------|-----------------|----------|-------|--------------------------|
|                  | MAG             | ANG      | MAG             | ANG     | MAG             | ANG     | MAG             | ANG      |       |                          |
| 0.1              | 0.538           | -68.800  | 32.261          | 136.000 | 0.023           | 64.800  | 0.741           | -42.000  | 0.322 | 31.469                   |
| 0.4              | 0.385           | -146.900 | 11.973          | 94.900  | 0.053           | 57.300  | 0.302           | -81.000  | 0.818 | 23.539                   |
| 0.8              | 0.358           | -179.500 | 6.233           | 76.200  | 0.090           | 57.600  | 0.191           | -94.800  | 0.984 | 18.405                   |
| 1.0              | 0.352           | 170.400  | 5.038           | 69.100  | 0.109           | 56.000  | 0.169           | -98.300  | 1.014 | 15.931                   |
| 1.5              | 0.345           | 152.000  | 3.447           | 53.400  | 0.157           | 49.400  | 0.139           | -102.200 | 1.040 | 12.192                   |
| 2.0              | 0.335           | 137.400  | 2.649           | 39.400  | 0.206           | 41.200  | 0.120           | -104.900 | 1.048 | 9.756                    |
| 2.5              | 0.334           | 124.900  | 2.189           | 25.600  | 0.255           | 32.000  | 0.101           | -108.700 | 1.041 | 8.090                    |
| 3.0              | 0.334           | 112.100  | 1.904           | 12.300  | 0.302           | 22.000  | 0.081           | -124.300 | 1.036 | 6.829                    |
| 4.0              | 0.396           | 83.800   | 1.544           | -13.400 | 0.390           | 0.900   | 0.100           | 147.600  | 1.012 | 5.314                    |
| 5.0              | 0.483           | 50.200   | 1.294           | -38.000 | 0.453           | -20.200 | 0.236           | 112.500  | 0.997 | 4.558                    |

V<sub>CE</sub> = 5.0 V, I<sub>c</sub> = 10 mA

|     |       |          |        |         |       |         |       |          |       |        |
|-----|-------|----------|--------|---------|-------|---------|-------|----------|-------|--------|
| 0.1 | 0.717 | -44.700  | 22.801 | 147.800 | 0.029 | 68.600  | 0.867 | -28.800  | 0.210 | 28.956 |
| 0.4 | 0.466 | -119.600 | 10.924 | 103.000 | 0.063 | 49.200  | 0.442 | -67.400  | 0.609 | 22.390 |
| 0.8 | 0.383 | -161.000 | 5.912  | 80.300  | 0.093 | 48.100  | 0.279 | -81.500  | 0.886 | 18.033 |
| 1.0 | 0.371 | -173.600 | 4.804  | 72.300  | 0.108 | 47.600  | 0.246 | -84.900  | 0.954 | 16.482 |
| 1.5 | 0.356 | 163.800  | 3.304  | 55.300  | 0.149 | 43.800  | 0.206 | -89.800  | 1.029 | 12.415 |
| 2.0 | 0.349 | 146.600  | 2.545  | 40.600  | 0.192 | 37.800  | 0.183 | -94.100  | 1.055 | 9.785  |
| 2.5 | 0.346 | 131.700  | 2.110  | 26.300  | 0.237 | 30.200  | 0.163 | -99.400  | 1.055 | 8.057  |
| 3.0 | 0.349 | 118.200  | 1.842  | 12.700  | 0.282 | 21.500  | 0.140 | -111.400 | 1.045 | 6.851  |
| 4.0 | 0.403 | 87.800   | 1.503  | -13.400 | 0.369 | 1.900   | 0.113 | -179.400 | 1.015 | 5.349  |
| 5.0 | 0.485 | 53.100   | 1.262  | -38.900 | 0.437 | -18.800 | 0.229 | 127.200  | 0.992 | 4.606  |

Note:

1. Gain Calculations:



$$\text{MAG} = \frac{|S_{21}|}{|S_{12}|} (K \pm \sqrt{K^2 - 1}). \text{ When } K \leq 1, \text{ MAG is undefined and MSG values are used. } \text{MSG} = \frac{|S_{21}|}{|S_{12}|}, K = \frac{1 + |\Delta|^2 - |S_{11}|^2 - |S_{22}|^2}{2 |S_{12}| |S_{21}|}, \Delta = S_{11} S_{22} - S_{21} S_{12}$$

MAG = Maximum Available Gain

MSG = Maximum Stable Gain

# NE688 SERIES

## TYPICAL SCATTERING PARAMETERS (T<sub>A</sub> = 25°C)

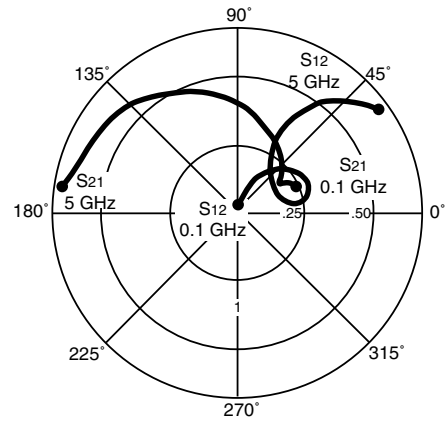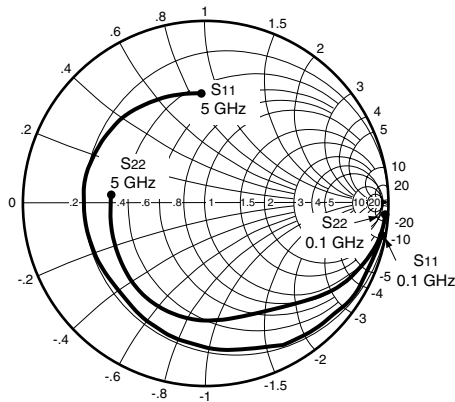

Coordinates in Ohms  
Frequency in GHz  
(V<sub>CE</sub> = 0.5 V, I<sub>c</sub> = 0.5 mA)

### NE68830

V<sub>CE</sub> = 0.5 V, I<sub>c</sub> = 0.5 mA

| FREQUENCY<br>GHz | S <sub>11</sub> |          | S <sub>21</sub> |         | S <sub>12</sub> |        | S <sub>22</sub> |          | K     | MAG <sup>1</sup><br>(dB) |
|------------------|-----------------|----------|-----------------|---------|-----------------|--------|-----------------|----------|-------|--------------------------|
|                  | MAG             | ANG      | MAG             | ANG     | MAG             | ANG    | MAG             | ANG      |       |                          |
| 0.1              | 0.977           | -15.600  | 1.794           | 165.200 | 0.063           | 78.200 | 0.989           | -8.600   | 0.101 | 14.545                   |
| 0.4              | 0.880           | -61.200  | 1.560           | 127.600 | 0.209           | 50.900 | 0.883           | -29.700  | 0.247 | 8.730                    |
| 0.8              | 0.749           | -103.800 | 1.199           | 92.400  | 0.282           | 26.900 | 0.745           | -47.000  | 0.457 | 6.286                    |
| 1.0              | 0.710           | -119.300 | 1.057           | 79.900  | 0.287           | 19.000 | 0.706           | -53.300  | 0.549 | 5.662                    |
| 1.5              | 0.670           | -148.700 | 0.832           | 57.200  | 0.249           | 7.800  | 0.654           | -67.800  | 0.777 | 5.239                    |
| 2.0              | 0.667           | -171.700 | 0.691           | 43.200  | 0.185           | 11.100 | 0.641           | -82.200  | 1.079 | 4.012                    |
| 2.5              | 0.669           | 168.000  | 0.595           | 35.800  | 0.160           | 39.600 | 0.636           | -97.500  | 1.352 | 2.162                    |
| 3.0              | 0.663           | 148.500  | 0.545           | 34.900  | 0.240           | 62.300 | 0.624           | -113.300 | 1.179 | 0.998                    |

V<sub>CE</sub> = 1.0 V, I<sub>c</sub> = 1.0 mA

|     |       |          |       |         |       |        |       |          |       |        |
|-----|-------|----------|-------|---------|-------|--------|-------|----------|-------|--------|
| 0.1 | 0.956 | -16.900  | 3.478 | 165.200 | 0.050 | 78.400 | 0.983 | -9.700   | 0.092 | 18.424 |
| 0.4 | 0.824 | -67.100  | 2.847 | 128.900 | 0.157 | 50.900 | 0.834 | -32.200  | 0.224 | 12.585 |
| 0.8 | 0.672 | -110.800 | 2.021 | 97.700  | 0.202 | 31.500 | 0.661 | -48.100  | 0.444 | 10.002 |
| 1.0 | 0.630 | -126.100 | 1.739 | 86.900  | 0.205 | 26.700 | 0.613 | -53.400  | 0.555 | 9.285  |
| 1.5 | 0.583 | -154.600 | 1.306 | 67.000  | 0.188 | 25.000 | 0.550 | -64.600  | 0.849 | 8.418  |
| 2.0 | 0.571 | -176.300 | 1.067 | 53.000  | 0.174 | 36.300 | 0.528 | -75.600  | 1.116 | 5.800  |
| 2.5 | 0.569 | 165.000  | 0.918 | 42.700  | 0.201 | 53.800 | 0.520 | -87.500  | 1.149 | 4.251  |
| 3.0 | 0.562 | 147.100  | 0.821 | 36.200  | 0.274 | 63.000 | 0.513 | -100.100 | 1.056 | 3.316  |
| 4.0 | 0.554 | 115.300  | 0.745 | 28.400  | 0.477 | 56.800 | 0.476 | -128.100 | 0.969 | 1.936  |
| 5.0 | 0.562 | 93.000   | 0.751 | 20.000  | 0.635 | 39.900 | 0.439 | -166.000 | 0.985 | 0.729  |

V<sub>CE</sub> = 3.0 V, I<sub>c</sub> = 3.0 mA

|     |       |          |       |         |       |        |       |          |       |        |
|-----|-------|----------|-------|---------|-------|--------|-------|----------|-------|--------|
| 0.1 | 0.869 | -24.100  | 9.277 | 160.200 | 0.035 | 76.600 | 0.957 | -14.600  | 0.114 | 24.233 |
| 0.4 | 0.635 | -85.100  | 6.331 | 119.900 | 0.097 | 51.200 | 0.673 | -40.700  | 0.380 | 18.147 |
| 0.8 | 0.484 | -127.600 | 3.861 | 94.600  | 0.124 | 45.600 | 0.471 | -51.200  | 0.690 | 14.933 |
| 1.0 | 0.449 | -141.200 | 3.196 | 86.700  | 0.134 | 46.800 | 0.426 | -53.800  | 0.814 | 13.775 |
| 1.5 | 0.415 | -166.200 | 2.270 | 71.200  | 0.162 | 52.300 | 0.371 | -59.200  | 1.003 | 11.109 |
| 2.0 | 0.402 | 174.800  | 1.800 | 59.500  | 0.199 | 57.200 | 0.352 | -65.500  | 1.064 | 8.018  |
| 2.5 | 0.401 | 159.600  | 1.523 | 49.600  | 0.246 | 60.100 | 0.348 | -72.700  | 1.043 | 6.648  |
| 3.0 | 0.396 | 144.900  | 1.339 | 41.200  | 0.304 | 60.300 | 0.347 | -80.800  | 1.005 | 5.989  |
| 4.0 | 0.411 | 118.700  | 1.114 | 27.800  | 0.434 | 54.500 | 0.332 | -100.400 | 0.947 | 4.094  |
| 5.0 | 0.470 | 99.800   | 1.000 | 15.700  | 0.560 | 43.200 | 0.289 | -136.400 | 0.931 | 2.518  |

V<sub>CE</sub> = 3.0 V, I<sub>c</sub> = 7.0 mA

|     |       |          |        |         |       |        |       |          |       |        |
|-----|-------|----------|--------|---------|-------|--------|-------|----------|-------|--------|
| 0.1 | 0.721 | -40.400  | 17.900 | 149.800 | 0.032 | 70.700 | 0.873 | -25.700  | 0.206 | 27.477 |
| 0.4 | 0.434 | -111.800 | 8.737  | 106.900 | 0.075 | 55.700 | 0.453 | -55.300  | 0.650 | 20.663 |
| 0.8 | 0.350 | -150.000 | 4.773  | 87.500  | 0.112 | 60.000 | 0.293 | -61.900  | 0.915 | 16.296 |
| 1.0 | 0.336 | -161.700 | 3.890  | 81.400  | 0.132 | 61.700 | 0.263 | -63.300  | 0.973 | 14.694 |
| 1.5 | 0.318 | -178.800 | 2.710  | 69.200  | 0.184 | 63.300 | 0.230 | -67.100  | 1.035 | 10.542 |
| 2.0 | 0.315 | 163.400  | 2.124  | 59.100  | 0.240 | 62.700 | 0.221 | -71.900  | 1.035 | 8.321  |
| 2.5 | 0.313 | 150.200  | 1.779  | 50.200  | 0.297 | 60.700 | 0.222 | -77.600  | 1.021 | 6.882  |
| 3.0 | 0.310 | 137.900  | 1.559  | 42.400  | 0.355 | 57.600 | 0.226 | -84.600  | 1.004 | 6.059  |
| 4.0 | 0.322 | 116.200  | 1.305  | 29.000  | 0.470 | 49.300 | 0.220 | -103.900 | 0.973 | 4.435  |
| 5.0 | 0.397 | 102.200  | 1.160  | 16.500  | 0.570 | 38.800 | 0.194 | -144.300 | 0.954 | 3.086  |

See notes on previous page.

## TYPICAL SCATTERING PARAMETERS (T<sub>A</sub> = 25°C)

### NE68830

V<sub>CE</sub> = 3.0 V, I<sub>C</sub> = 20 mA

| FREQUENCY<br>GHz | S <sub>11</sub> |          | S <sub>21</sub> |         | S <sub>12</sub> |        | S <sub>22</sub> |          | K     | MAG <sup>1</sup><br>(dB) |
|------------------|-----------------|----------|-----------------|---------|-----------------|--------|-----------------|----------|-------|--------------------------|
|                  | MAG             | ANG      | MAG             | ANG     | MAG             | ANG    | MAG             | ANG      |       |                          |
| 0.1              | 0.472           | -66.200  | 29.896          | 134.700 | 0.024           | 69.600 | 0.707           | -41.100  | 0.408 | 30.954                   |
| 0.4              | 0.313           | -143.700 | 10.607          | 97.700  | 0.061           | 67.800 | 0.276           | -66.500  | 0.884 | 22.403                   |
| 0.8              | 0.289           | -171.000 | 5.532           | 83.500  | 0.110           | 70.700 | 0.173           | -70.800  | 0.994 | 17.015                   |
| 1.0              | 0.285           | -179.400 | 4.472           | 78.800  | 0.135           | 70.500 | 0.154           | -72.100  | 1.012 | 14.543                   |
| 1.5              | 0.283           | -165.900 | 3.076           | 68.600  | 0.196           | 68.100 | 0.134           | -75.600  | 1.025 | 10.998                   |
| 2.0              | 0.280           | -153.300 | 2.400           | 59.900  | 0.256           | 64.400 | 0.129           | -79.500  | 1.022 | 8.816                    |
| 2.5              | 0.278           | -143.200 | 2.003           | 51.900  | 0.314           | 60.300 | 0.132           | -83.700  | 1.013 | 7.348                    |
| 3.0              | 0.271           | -131.700 | 1.747           | 44.400  | 0.371           | 55.800 | 0.138           | -89.700  | 1.006 | 6.272                    |
| 4.0              | 0.285           | -114.200 | 1.440           | 31.100  | 0.473           | 45.900 | 0.134           | -110.400 | 0.992 | 4.835                    |
| 5.0              | 0.365           | -103.100 | 1.272           | 18.100  | 0.553           | 35.300 | 0.124           | -169.400 | 0.981 | 3.618                    |

V<sub>CE</sub> = 5.0 V, I<sub>C</sub> = 10 mA

|     |       |          |        |         |       |        |       |          |       |        |
|-----|-------|----------|--------|---------|-------|--------|-------|----------|-------|--------|
| 0.1 | 0.656 | -44.300  | 22.050 | 146.100 | 0.029 | 70.900 | 0.835 | -29.100  | 0.264 | 28.810 |
| 0.4 | 0.380 | -119.100 | 9.847  | 104.200 | 0.067 | 59.500 | 0.400 | -57.400  | 0.732 | 21.672 |
| 0.8 | 0.311 | -155.500 | 5.283  | 86.600  | 0.107 | 64.100 | 0.258 | -62.400  | 0.949 | 16.935 |
| 1.0 | 0.299 | -166.800 | 4.287  | 81.100  | 0.129 | 65.200 | 0.232 | -63.600  | 0.989 | 15.216 |
| 1.5 | 0.291 | -173.200 | 2.964  | 69.500  | 0.183 | 65.300 | 0.204 | -67.100  | 1.028 | 11.073 |
| 2.0 | 0.289 | -157.500 | 2.315  | 60.200  | 0.239 | 63.500 | 0.197 | -71.700  | 1.028 | 8.840  |
| 2.5 | 0.289 | -145.100 | 1.932  | 51.600  | 0.294 | 60.600 | 0.201 | -76.800  | 1.016 | 7.393  |
| 3.0 | 0.285 | -131.600 | 1.686  | 43.900  | 0.349 | 57.000 | 0.207 | -83.200  | 1.006 | 6.382  |
| 4.0 | 0.307 | -110.900 | 1.388  | 30.500  | 0.453 | 48.400 | 0.205 | -100.900 | 0.982 | 4.863  |
| 5.0 | 0.385 | -98.500  | 1.225  | 17.800  | 0.543 | 38.300 | 0.173 | -142.100 | 0.965 | 3.533  |

Note:

1. Gain Calculations:


$$\text{MAG} = \frac{|S_{21}|}{|S_{12}|} (K \pm \sqrt{K^2 - 1}). \text{ When } K \leq 1, \text{ MAG is undefined and MSG values are used. } \text{MSG} = \frac{|S_{21}|}{|S_{12}|}, K = \frac{1 + |\Delta|^2 - |S_{11}|^2 - |S_{22}|^2}{2 |S_{12}| |S_{21}|}, \Delta = S_{11} S_{22} - S_{21} S_{12}$$

MAG = Maximum Available Gain


MSG = Maximum Stable Gain

# NE688 SERIES

## TYPICAL SCATTERING PARAMETERS (T<sub>A</sub> = 25°C)

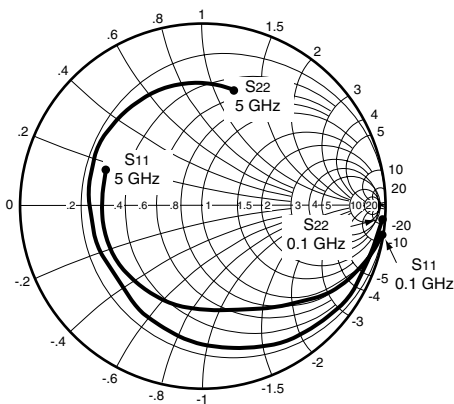

Coordinates in Ohms  
Frequency in GHz  
(V<sub>CE</sub> = 0.5 V, I<sub>c</sub> = 0.5 mA)

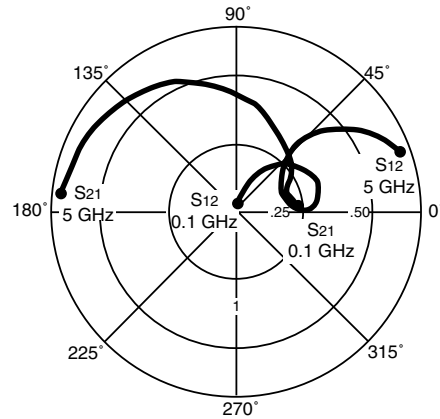

### NE68833

V<sub>CE</sub> = 0.5 V, I<sub>c</sub> = 0.5 mA

| FREQUENCY<br>GHz | S <sub>11</sub> |          | S <sub>21</sub> |         | S <sub>12</sub> |        | S <sub>22</sub> |          | K     | MAG <sup>1</sup><br>(dB) |
|------------------|-----------------|----------|-----------------|---------|-----------------|--------|-----------------|----------|-------|--------------------------|
|                  | MAG             | ANG      | MAG             | ANG     | MAG             | ANG    | MAG             | ANG      |       |                          |
| 0.1              | 0.971           | -15.100  | 1.775           | 164.000 | 0.065           | 79.000 | 0.989           | -8.700   | 0.117 | 14.363                   |
| 0.4              | 0.877           | -59.900  | 1.588           | 127.800 | 0.215           | 50.900 | 0.883           | -30.200  | 0.261 | 8.684                    |
| 0.8              | 0.723           | -105.400 | 1.237           | 90.500  | 0.295           | 25.300 | 0.729           | -48.600  | 0.491 | 6.225                    |
| 1.0              | 0.683           | -122.900 | 1.101           | 76.900  | 0.303           | 16.500 | 0.682           | -55.300  | 0.581 | 5.603                    |
| 1.5              | 0.640           | -158.100 | 0.871           | 51.800  | 0.265           | 2.900  | 0.609           | -71.400  | 0.824 | 5.168                    |
| 2.0              | 0.644           | 174.400  | 0.717           | 35.000  | 0.199           | 3.900  | 0.584           | -88.400  | 1.167 | 3.092                    |
| 2.5              | 0.669           | 151.300  | 0.612           | 25.500  | 0.171           | 27.800 | 0.578           | -107.300 | 1.428 | 1.649                    |
| 3.0              | 0.682           | 131.300  | 0.544           | 22.100  | 0.243           | 47.700 | 0.580           | -126.900 | 1.244 | 0.525                    |

V<sub>CE</sub> = 1.0 V, I<sub>c</sub> = 1.0 mA

|     |       |          |       |         |       |        |       |          |       |        |
|-----|-------|----------|-------|---------|-------|--------|-------|----------|-------|--------|
| 0.1 | 0.960 | -16.300  | 3.468 | 165.600 | 0.051 | 78.200 | 0.983 | -9.800   | 0.098 | 18.325 |
| 0.4 | 0.821 | -66.100  | 2.890 | 128.500 | 0.163 | 51.000 | 0.835 | -33.200  | 0.235 | 12.487 |
| 0.8 | 0.650 | -112.800 | 2.090 | 95.600  | 0.215 | 30.000 | 0.649 | -50.700  | 0.459 | 9.877  |
| 1.0 | 0.602 | -130.600 | 1.803 | 83.800  | 0.219 | 24.200 | 0.592 | -56.500  | 0.571 | 9.156  |
| 1.5 | 0.555 | -165.100 | 1.360 | 61.400  | 0.203 | 20.000 | 0.508 | -69.500  | 0.865 | 8.260  |
| 2.0 | 0.556 | 168.200  | 1.106 | 44.800  | 0.190 | 28.300 | 0.474 | -83.200  | 1.122 | 5.529  |
| 2.5 | 0.576 | 146.900  | 0.938 | 32.500  | 0.215 | 41.900 | 0.464 | -99.100  | 1.162 | 3.959  |
| 3.0 | 0.592 | 128.400  | 0.826 | 24.000  | 0.282 | 48.500 | 0.468 | -116.200 | 1.068 | 3.074  |
| 4.0 | 0.618 | 98.100   | 0.724 | 13.600  | 0.459 | 40.800 | 0.483 | -151.100 | 0.968 | 1.979  |
| 5.0 | 0.626 | 75.400   | 0.700 | 4.000   | 0.593 | 24.000 | 0.500 | 174.500  | 0.990 | 0.720  |

V<sub>CE</sub> = 1.0 V, I<sub>c</sub> = 3.0 mA

|     |       |          |       |         |       |        |       |          |       |        |
|-----|-------|----------|-------|---------|-------|--------|-------|----------|-------|--------|
| 0.1 | 0.877 | -28.400  | 9.241 | 157.900 | 0.048 | 73.200 | 0.937 | -19.300  | 0.128 | 22.845 |
| 0.4 | 0.607 | -94.900  | 5.850 | 113.900 | 0.122 | 46.800 | 0.599 | -53.600  | 0.411 | 16.808 |
| 0.8 | 0.462 | -141.800 | 3.462 | 87.200  | 0.154 | 40.500 | 0.382 | -70.400  | 0.731 | 13.518 |
| 1.0 | 0.437 | -157.700 | 2.859 | 78.500  | 0.166 | 40.900 | 0.331 | -75.500  | 0.853 | 12.361 |
| 1.5 | 0.423 | 173.800  | 2.032 | 61.200  | 0.202 | 43.700 | 0.265 | -87.200  | 1.029 | 8.987  |
| 2.0 | 0.437 | 152.600  | 1.616 | 47.500  | 0.246 | 45.300 | 0.239 | -100.400 | 1.079 | 6.461  |
| 2.5 | 0.461 | 136.300  | 1.361 | 35.700  | 0.299 | 44.700 | 0.237 | -115.600 | 1.062 | 5.066  |
| 3.0 | 0.481 | 121.800  | 1.197 | 26.300  | 0.356 | 42.000 | 0.250 | -131.300 | 1.033 | 4.151  |
| 4.0 | 0.523 | 98.200   | 1.005 | 10.500  | 0.473 | 32.300 | 0.294 | -162.400 | 0.981 | 3.273  |
| 5.0 | 0.571 | 78.400   | 0.882 | -2.600  | 0.566 | 19.400 | 0.349 | 167.000  | 0.974 | 1.927  |

V<sub>CE</sub> = 3.0 V, I<sub>c</sub> = 3.0 mA

|     |       |          |       |         |       |        |       |          |       |        |
|-----|-------|----------|-------|---------|-------|--------|-------|----------|-------|--------|
| 0.1 | 0.892 | -23.800  | 9.321 | 160.400 | 0.037 | 75.000 | 0.954 | -15.000  | 0.137 | 24.013 |
| 0.4 | 0.629 | -83.800  | 6.328 | 118.600 | 0.102 | 51.000 | 0.666 | -42.700  | 0.399 | 17.927 |
| 0.8 | 0.446 | -129.900 | 3.868 | 91.300  | 0.133 | 44.500 | 0.454 | -55.000  | 0.719 | 14.636 |
| 1.0 | 0.409 | -146.800 | 3.204 | 82.400  | 0.144 | 44.900 | 0.403 | -58.200  | 0.841 | 13.473 |
| 1.5 | 0.379 | -178.400 | 2.277 | 65.100  | 0.177 | 48.200 | 0.336 | -65.900  | 1.017 | 10.300 |
| 2.0 | 0.389 | 158.300  | 1.797 | 51.400  | 0.218 | 50.600 | 0.305 | -75.600  | 1.066 | 7.588  |
| 2.5 | 0.410 | 140.300  | 1.507 | 39.500  | 0.270 | 50.800 | 0.293 | -88.100  | 1.043 | 6.192  |
| 3.0 | 0.432 | 125.000  | 1.315 | 29.800  | 0.327 | 48.500 | 0.293 | -102.600 | 1.009 | 5.474  |
| 4.0 | 0.484 | 100.300  | 1.087 | 13.600  | 0.449 | 39.400 | 0.310 | -134.200 | 0.945 | 3.840  |
| 5.0 | 0.533 | 79.800   | 0.947 | -0.100  | 0.558 | 26.400 | 0.342 | -168.400 | 0.939 | 2.297  |

TYPICAL SCATTERING PARAMETERS (T<sub>A</sub> = 25°C)

## NE68833

V<sub>CE</sub> = 3.0 V, I<sub>C</sub> = 7.0 mA

| FREQUENCY<br>GHz | S <sub>11</sub> |          | S <sub>21</sub> |         | S <sub>12</sub> |        | S <sub>22</sub> |          | K     | MAG <sup>1</sup><br>(dB) |
|------------------|-----------------|----------|-----------------|---------|-----------------|--------|-----------------|----------|-------|--------------------------|
|                  | MAG             | ANG      | MAG             | ANG     | MAG             | ANG    | MAG             | ANG      |       |                          |
| 0.1              | 0.738           | -38.900  | 17.561          | 148.600 | 0.035           | 72.200 | 0.874           | -25.500  | 0.226 | 27.005                   |
| 0.4              | 0.422           | -108.100 | 8.799           | 106.000 | 0.078           | 55.800 | 0.453           | -55.900  | 0.661 | 20.523                   |
| 0.8              | 0.317           | -152.000 | 4.793           | 85.000  | 0.119           | 58.000 | 0.283           | -63.900  | 0.921 | 16.051                   |
| 1.0              | 0.304           | -166.400 | 3.908           | 78.000  | 0.140           | 58.700 | 0.248           | -66.300  | 0.978 | 14.458                   |
| 1.5              | 0.302           | 168.000  | 2.707           | 64.000  | 0.196           | 57.900 | 0.202           | -74.100  | 1.033 | 10.291                   |
| 2.0              | 0.317           | 148.300  | 2.120           | 52.100  | 0.254           | 55.100 | 0.180           | -84.800  | 1.036 | 8.051                    |
| 2.5              | 0.342           | 133.600  | 1.769           | 41.800  | 0.311           | 50.900 | 0.173           | -99.100  | 1.022 | 6.632                    |
| 3.0              | 0.358           | 121.600  | 1.541           | 32.300  | 0.368           | 45.900 | 0.177           | -115.100 | 1.008 | 5.662                    |
| 4.0              | 0.406           | 101.800  | 1.282           | 16.200  | 0.471           | 34.800 | 0.204           | -148.600 | 0.976 | 4.349                    |
| 5.0              | 0.471           | 83.500   | 1.117           | 1.100   | 0.557           | 22.300 | 0.252           | 175.600  | 0.964 | 3.022                    |

V<sub>CE</sub> = 3.0 V, I<sub>C</sub> = 20 mA

|     |       |          |        |         |       |        |       |          |       |        |
|-----|-------|----------|--------|---------|-------|--------|-------|----------|-------|--------|
| 0.1 | 0.479 | -65.600  | 29.593 | 133.500 | 0.026 | 65.900 | 0.692 | -41.600  | 0.448 | 30.562 |
| 0.4 | 0.276 | -141.300 | 10.351 | 95.700  | 0.066 | 67.400 | 0.266 | -67.200  | 0.898 | 21.954 |
| 0.8 | 0.252 | -176.800 | 5.382  | 80.200  | 0.119 | 68.300 | 0.165 | -73.600  | 0.999 | 16.554 |
| 1.0 | 0.251 | 171.500  | 4.352  | 74.600  | 0.146 | 67.100 | 0.146 | -77.100  | 1.014 | 14.006 |
| 1.5 | 0.265 | 151.700  | 2.993  | 62.700  | 0.212 | 62.500 | 0.121 | -88.700  | 1.024 | 10.543 |
| 2.0 | 0.289 | 136.500  | 2.324  | 52.200  | 0.275 | 56.900 | 0.110 | -104.300 | 1.021 | 8.387  |
| 2.5 | 0.313 | 124.100  | 1.932  | 42.400  | 0.335 | 50.800 | 0.114 | -122.300 | 1.012 | 6.930  |
| 3.0 | 0.332 | 113.100  | 1.678  | 33.800  | 0.390 | 44.500 | 0.130 | -139.600 | 1.007 | 5.840  |
| 4.0 | 0.378 | 96.000   | 1.384  | 17.900  | 0.486 | 32.000 | 0.175 | -170.800 | 0.992 | 4.545  |
| 5.0 | 0.445 | 80.700   | 1.201  | 3.100   | 0.556 | 19.400 | 0.231 | 160.200  | 0.983 | 3.345  |

V<sub>CE</sub> = 5.0 V, I<sub>C</sub> = 10 mA

|     |       |          |        |         |       |        |       |          |       |        |
|-----|-------|----------|--------|---------|-------|--------|-------|----------|-------|--------|
| 0.1 | 0.686 | -44.200  | 22.023 | 145.500 | 0.030 | 67.500 | 0.828 | -29.500  | 0.293 | 28.658 |
| 0.4 | 0.356 | -115.200 | 9.698  | 102.500 | 0.071 | 59.600 | 0.390 | -57.900  | 0.756 | 21.354 |
| 0.8 | 0.271 | -158.000 | 5.191  | 83.500  | 0.116 | 62.500 | 0.246 | -64.000  | 0.958 | 16.508 |
| 1.0 | 0.262 | -172.200 | 4.212  | 77.100  | 0.139 | 62.400 | 0.217 | -66.100  | 0.997 | 14.815 |
| 1.5 | 0.266 | 161.900  | 2.912  | 64.000  | 0.199 | 60.200 | 0.178 | -73.800  | 1.028 | 10.631 |
| 2.0 | 0.285 | 143.600  | 2.269  | 52.800  | 0.258 | 56.100 | 0.158 | -84.900  | 1.029 | 8.398  |
| 2.5 | 0.312 | 129.300  | 1.886  | 42.600  | 0.316 | 51.300 | 0.153 | -99.700  | 1.017 | 6.962  |
| 3.0 | 0.332 | 117.100  | 1.639  | 33.700  | 0.370 | 45.800 | 0.158 | -116.500 | 1.008 | 5.901  |
| 4.0 | 0.381 | 97.900   | 1.351  | 17.500  | 0.469 | 34.200 | 0.187 | -150.600 | 0.986 | 4.595  |
| 5.0 | 0.449 | 81.900   | 1.175  | 2.500   | 0.548 | 22.000 | 0.230 | 176.200  | 0.970 | 3.313  |

Note:

1. Gain Calculations:


$$\text{MAG} = \frac{|S_{21}|}{|S_{12}|} (K \pm \sqrt{K^2 - 1}). \text{ When } K \leq 1, \text{ MAG is undefined and MSG values are used. } \text{MSG} = \frac{|S_{21}|}{|S_{12}|}, K = \frac{1 + |\Delta|^2 - |S_{11}|^2 - |S_{22}|^2}{2 |S_{12}| |S_{21}|}, \Delta = S_{11} S_{22} - S_{21} S_{12}$$

MAG = Maximum Available Gain


MSG = Maximum Stable Gain

**NE688 SERIES**

**TYPICAL SCATTERING PARAMETERS** ( $T_A = 25^\circ\text{C}$ )

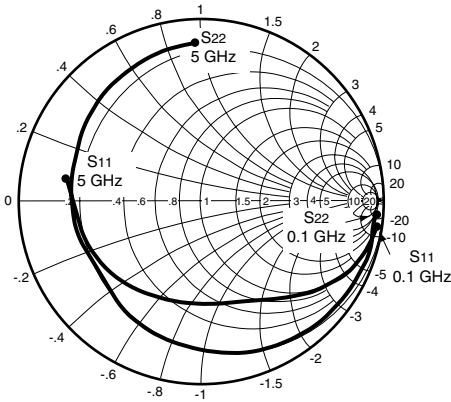

Coordinates in Ohms  
Frequency in GHz  
( $V_{CE} = 0.5\text{ V}$ ,  $I_C = 0.5\text{ mA}$ )

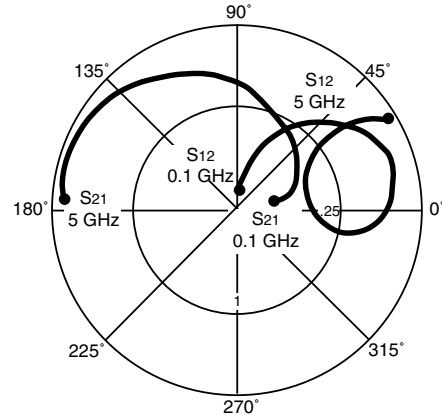

**NE68839**

**$V_{CE} = 0.5\text{ V}$ ,  $I_C = 0.5\text{ mA}$**

| FREQUENCY<br>GHz | S <sub>11</sub> |          | S <sub>21</sub> |         | S <sub>12</sub> |         | S <sub>22</sub> |          | K     | MAG <sup>1</sup><br>(dB) |
|------------------|-----------------|----------|-----------------|---------|-----------------|---------|-----------------|----------|-------|--------------------------|
|                  | MAG             | ANG      | MAG             | ANG     | MAG             | ANG     | MAG             | ANG      |       |                          |
| 0.1              | 0.989           | -15.100  | 1.756           | 167.700 | 0.057           | 80.500  | 0.990           | -7.000   | 0.047 | 14.886                   |
| 0.4              | 0.899           | -58.000  | 1.616           | 131.900 | 0.205           | 53.400  | 0.898           | -26.300  | 0.227 | 8.967                    |
| 0.8              | 0.768           | -105.900 | 1.310           | 95.000  | 0.303           | 26.900  | 0.746           | -43.100  | 0.419 | 6.358                    |
| 1.0              | 0.727           | -125.800 | 1.169           | 80.700  | 0.319           | 16.700  | 0.690           | -49.600  | 0.493 | 5.640                    |
| 1.5              | 0.694           | -164.800 | 0.921           | 52.700  | 0.300           | -2.200  | 0.595           | -65.200  | 0.669 | 4.871                    |
| 2.0              | 0.716           | 167.500  | 0.735           | 32.300  | 0.239           | -13.100 | 0.569           | -82.500  | 0.859 | 4.879                    |
| 2.5              | 0.755           | 147.100  | 0.601           | 18.900  | 0.168           | -10.700 | 0.570           | -102.800 | 1.140 | 3.262                    |
| 3.0              | 0.788           | 131.400  | 0.490           | 11.300  | 0.136           | 13.200  | 0.593           | -123.900 | 1.430 | 1.669                    |

**$V_{CE} = 1.0\text{ V}$ ,  $I_C = 1.0\text{ mA}$**

|     |       |          |       |         |       |        |       |          |       |        |
|-----|-------|----------|-------|---------|-------|--------|-------|----------|-------|--------|
| 0.1 | 0.968 | -17.300  | 3.482 | 166.900 | 0.047 | 79.200 | 0.986 | -8.600   | 0.054 | 18.697 |
| 0.4 | 0.847 | -65.200  | 3.022 | 132.100 | 0.159 | 52.200 | 0.850 | -30.300  | 0.199 | 12.789 |
| 0.8 | 0.697 | -115.200 | 2.251 | 98.700  | 0.220 | 28.700 | 0.656 | -47.500  | 0.386 | 10.100 |
| 1.0 | 0.660 | -134.900 | 1.936 | 86.400  | 0.229 | 20.900 | 0.587 | -53.700  | 0.470 | 9.271  |
| 1.5 | 0.631 | -173.000 | 1.448 | 62.300  | 0.213 | 9.900  | 0.477 | -67.500  | 0.704 | 8.324  |
| 2.0 | 0.655 | 160.900  | 1.129 | 43.900  | 0.184 | 8.800  | 0.438 | -83.000  | 0.955 | 7.879  |
| 2.5 | 0.692 | 142.400  | 0.933 | 30.100  | 0.166 | 18.400 | 0.433 | -101.400 | 1.147 | 5.168  |
| 3.0 | 0.728 | 127.900  | 0.770 | 19.800  | 0.179 | 31.500 | 0.451 | -121.300 | 1.194 | 3.675  |
| 4.0 | 0.790 | 106.200  | 0.588 | 8.600   | 0.271 | 39.000 | 0.534 | -157.100 | 0.985 | 3.364  |
| 5.0 | 0.828 | 90.000   | 0.502 | 3.700   | 0.360 | 30.600 | 0.624 | 175.200  | 0.947 | 1.444  |

**$V_{CE} = 3.0\text{ V}$ ,  $I_C = 3.0\text{ mA}$**

|     |       |          |       |         |       |        |       |          |       |        |
|-----|-------|----------|-------|---------|-------|--------|-------|----------|-------|--------|
| 0.1 | 0.894 | -24.500  | 9.342 | 161.900 | 0.035 | 76.700 | 0.961 | -13.600  | 0.087 | 24.264 |
| 0.4 | 0.682 | -84.100  | 6.782 | 122.300 | 0.100 | 50.000 | 0.693 | -41.400  | 0.324 | 18.314 |
| 0.8 | 0.524 | -135.700 | 4.250 | 93.900  | 0.129 | 38.200 | 0.455 | -56.300  | 0.606 | 15.178 |
| 1.0 | 0.501 | -154.100 | 3.523 | 84.500  | 0.136 | 36.700 | 0.390 | -60.700  | 0.724 | 14.134 |
| 1.5 | 0.503 | 172.800  | 2.472 | 66.200  | 0.154 | 37.500 | 0.295 | -71.900  | 0.938 | 12.055 |
| 2.0 | 0.542 | 151.200  | 1.886 | 51.600  | 0.174 | 39.900 | 0.251 | -87.400  | 1.052 | 8.957  |
| 2.5 | 0.586 | 135.700  | 1.542 | 39.500  | 0.201 | 41.700 | 0.239 | -106.600 | 1.068 | 7.260  |
| 3.0 | 0.626 | 123.800  | 1.297 | 29.300  | 0.233 | 42.000 | 0.254 | -126.500 | 1.049 | 6.108  |
| 4.0 | 0.704 | 105.600  | 0.988 | 13.200  | 0.303 | 38.000 | 0.335 | -159.600 | 0.959 | 5.133  |
| 5.0 | 0.766 | 90.900   | 0.799 | 0.700   | 0.366 | 30.000 | 0.442 | 176.400  | 0.901 | 3.391  |

**$V_{CE} = 3.0\text{ V}$ ,  $I_C = 7.0\text{ mA}$**

|     |       |          |        |         |       |        |       |          |       |        |
|-----|-------|----------|--------|---------|-------|--------|-------|----------|-------|--------|
| 0.1 | 0.763 | -36.500  | 18.110 | 153.100 | 0.029 | 72.400 | 0.901 | -22.600  | 0.164 | 27.955 |
| 0.4 | 0.501 | -110.300 | 9.906  | 110.000 | 0.072 | 51.400 | 0.496 | -55.500  | 0.544 | 21.386 |
| 0.8 | 0.421 | -157.600 | 5.514  | 87.400  | 0.101 | 50.300 | 0.288 | -68.500  | 0.835 | 17.371 |
| 1.0 | 0.418 | -172.900 | 4.478  | 80.100  | 0.115 | 51.100 | 0.239 | -73.600  | 0.918 | 15.904 |
| 1.5 | 0.449 | 161.400  | 3.060  | 65.400  | 0.151 | 51.200 | 0.171 | -90.700  | 1.016 | 12.285 |
| 2.0 | 0.494 | 144.100  | 2.319  | 53.100  | 0.188 | 49.600 | 0.148 | -116.000 | 1.047 | 9.591  |
| 2.5 | 0.539 | 131.600  | 1.887  | 42.300  | 0.224 | 46.700 | 0.159 | -141.800 | 1.043 | 7.985  |
| 3.0 | 0.583 | 121.700  | 1.583  | 33.100  | 0.258 | 43.300 | 0.193 | -161.300 | 1.032 | 6.790  |
| 4.0 | 0.662 | 105.800  | 1.216  | 17.100  | 0.319 | 35.300 | 0.284 | 174.500  | 0.986 | 5.811  |
| 5.0 | 0.732 | 92.400   | 0.988  | 3.800   | 0.367 | 26.600 | 0.384 | 158.700  | 0.940 | 4.301  |

See notes on previous page.

## TYPICAL SCATTERING PARAMETERS (T<sub>A</sub> = 25°C)

### NE68839

VCE = 5.0 V, Ic = 5.0 mA

| FREQUENCY<br>GHz | S <sub>11</sub> |          | S <sub>21</sub> |         | S <sub>12</sub> |        | S <sub>22</sub> |          | K     | MAG <sup>1</sup><br>(dB) |
|------------------|-----------------|----------|-----------------|---------|-----------------|--------|-----------------|----------|-------|--------------------------|
|                  | MAG             | ANG      | MAG             | ANG     | MAG             | ANG    | MAG             | ANG      |       |                          |
| 0.1              | 0.840           | -29.900  | 14.218          | 158.000 | 0.029           | 74.900 | 0.937           | -17.100  | 0.114 | 26.904                   |
| 0.4              | 0.574           | -94.600  | 9.003           | 116.400 | 0.078           | 51.400 | 0.598           | -46.200  | 0.444 | 20.623                   |
| 0.8              | 0.440           | -144.900 | 5.274           | 91.200  | 0.105           | 46.300 | 0.372           | -58.000  | 0.750 | 17.010                   |
| 1.0              | 0.425           | -162.500 | 4.315           | 83.200  | 0.116           | 46.700 | 0.315           | -61.700  | 0.854 | 15.705                   |
| 1.5              | 0.443           | 167.400  | 2.978           | 67.400  | 0.147           | 47.900 | 0.232           | -72.500  | 0.991 | 13.066                   |
| 2.0              | 0.489           | 147.700  | 2.263           | 54.300  | 0.178           | 47.900 | 0.190           | -89.500  | 1.045 | 9.746                    |
| 2.5              | 0.534           | 133.000  | 1.846           | 43.100  | 0.211           | 46.500 | 0.177           | -111.500 | 1.048 | 8.074                    |
| 3.0              | 0.575           | 122.900  | 1.549           | 33.600  | 0.244           | 44.400 | 0.190           | -133.600 | 1.040 | 6.802                    |
| 4.0              | 0.660           | 106.200  | 1.190           | 17.500  | 0.308           | 38.000 | 0.264           | -166.000 | 0.974 | 5.870                    |
| 5.0              | 0.728           | 92.400   | 0.962           | 4.100   | 0.362           | 29.700 | 0.365           | 172.800  | 0.925 | 4.245                    |

VCE = 5.0 V, Ic = 10 mA

|     |       |          |        |         |       |        |       |          |       |        |
|-----|-------|----------|--------|---------|-------|--------|-------|----------|-------|--------|
| 0.1 | 0.703 | -41.700  | 22.638 | 149.200 | 0.027 | 69.700 | 0.865 | -26.400  | 0.232 | 29.235 |
| 0.4 | 0.441 | -117.800 | 11.095 | 106.400 | 0.064 | 54.500 | 0.432 | -59.100  | 0.640 | 22.389 |
| 0.8 | 0.378 | -163.300 | 6.015  | 85.900  | 0.095 | 55.900 | 0.246 | -71.500  | 0.901 | 18.015 |
| 1.0 | 0.383 | -177.500 | 4.863  | 79.200  | 0.112 | 56.300 | 0.203 | -77.000  | 0.956 | 16.377 |
| 1.5 | 0.418 | 158.400  | 3.313  | 65.600  | 0.153 | 55.200 | 0.145 | -97.200  | 1.020 | 12.494 |
| 2.0 | 0.468 | 142.100  | 2.505  | 53.900  | 0.193 | 52.200 | 0.133 | -126.000 | 1.035 | 9.985  |
| 2.5 | 0.512 | 130.300  | 2.034  | 43.700  | 0.231 | 48.300 | 0.153 | -152.300 | 1.034 | 8.325  |
| 3.0 | 0.559 | 120.900  | 1.708  | 34.800  | 0.265 | 44.100 | 0.191 | -170.400 | 1.024 | 7.135  |
| 4.0 | 0.638 | 105.400  | 1.312  | 19.300  | 0.325 | 35.200 | 0.282 | 168.100  | 0.993 | 6.061  |
| 5.0 | 0.712 | 92.600   | 1.066  | 5.700   | 0.370 | 26.100 | 0.377 | 154.100  | 0.954 | 4.596  |

Note:


1. Gain Calculations:

$$\text{MAG} = \frac{|S_{21}|}{|S_{12}|} (K \pm \sqrt{K^2 - 1}). \text{ When } K \leq 1, \text{ MAG is undefined and MSG values are used. } \text{MSG} = \frac{|S_{21}|}{|S_{12}|}, K = \frac{1 + |\Delta|^2 - |S_{11}|^2 - |S_{22}|^2}{2 |S_{12}| |S_{21}|}, \Delta = S_{11} S_{22} - S_{21} S_{12}$$

MAG = Maximum Available Gain

MSG = Maximum Stable Gain

SCHEMATIC

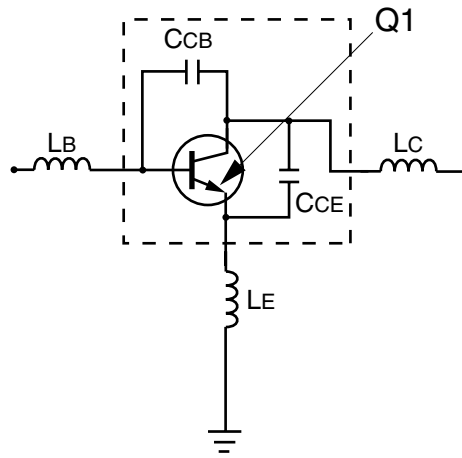

BJT NONLINEAR MODEL PARAMETERS (1)

| Parameters | Q1        | Parameters | Q1       |
|------------|-----------|------------|----------|
| IS         | 3.8e-16   | MJC        | 0.48     |
| BF         | 135.7     | XCJC       | 0.56     |
| NF         | 1         | CJS        | 0        |
| VAF        | 28        | VJS        | 0.75     |
| IKF        | 0.6       | MJS        | 0        |
| ISE        | 3.8e-15   | FC         | 0.75     |
| NE         | 1.49      | TF         | 11.0e-12 |
| BR         | 12.3      | XTF        | 0.36     |
| NR         | 1.1       | VTF        | 0.65     |
| VAR        | 3.5       | ITF        | 0.61     |
| IKR        | 0.06      | PTF        | 50       |
| ISC        | 3.5e-16   | TR         | 0.032e-9 |
| NC         | 1.62      | EG         | 1.11     |
| RE         | 0.4       | XTB        | 0        |
| RB         | 6.14      | XTI        | 3        |
| RBM        | 3.5       | KF         | 0        |
| IRB        | 0.001     | AF         | 1        |
| RC         | 4.2       |            |          |
| CJE        | 0.796e-12 |            |          |
| VJE        | 0.71      |            |          |
| MJE        | 0.38      |            |          |
| CJC        | 0.549e-12 |            |          |
| VJC        | 0.65      |            |          |

(1) Gummel-Poon Model

UNITS

| Parameter   | Units   |
|-------------|---------|
| time        | seconds |
| capacitance | farads  |
| inductance  | henries |
| resistance  | ohms    |
| voltage     | volts   |
| current     | amps    |

ADDITIONAL PARAMETERS


| Parameters | 68800    |
|------------|----------|
| CCB        | 0.24e-12 |
| CCE        | 0.27e-12 |
| LB         | 0.72e-9  |
| Lc         | 0.51e-9  |
| LE         | 0.19e-9  |

MODEL RANGE

Frequency: 0.1 to 10.0 GHz  
 Bias: VCE = 1 V to 3 V, IC = 1 mA to 10 mA  
 P1dB: 12.5 dBm at VCE = 3 V, IC = 10 mA, 2 GHz  
 Date: 10/3/96

NE68818 NONLINEAR MODEL

**SCHEMATIC**

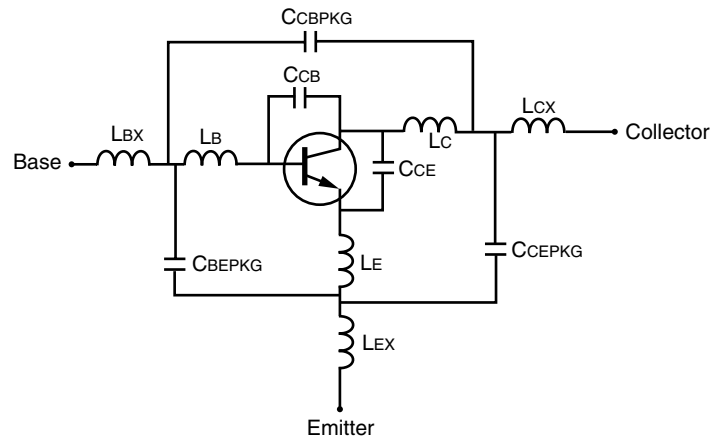

**BJT NONLINEAR MODEL PARAMETERS (1)**

| Parameters | Q1        | Parameters | Q1      |
|------------|-----------|------------|---------|
| IS         | 3.8e-16   | MJC        | 0.48    |
| BF         | 135.7     | XCJC       | 0.56    |
| NF         | 1         | CJS        | 0       |
| VAF        | 28        | VJS        | 0.75    |
| IKF        | 0.6       | MJS        | 0       |
| ISE        | 3.8e-15   | FC         | 0.75    |
| NE         | 1.49      | TF         | 11e-12  |
| BR         | 12.3      | XTF        | 0.36    |
| NR         | 1.1       | VTF        | 0.65    |
| VAR        | 3.5       | ITF        | 0.61    |
| IKR        | 0.06      | PTF        | 50      |
| ISC        | 3.5e-16   | TR         | 32e-12  |
| NC         | 1.62      | EG         | 1.11    |
| RE         | 0.4       | XTB        | 0       |
| RB         | 6.14      | XTI        | 3       |
| RBM        | 3.5       | KF         | 1.5e-14 |
| IRB        | 0.001     | AF         | 1.22    |
| RC         | 4.2       |            |         |
| CJE        | 0.796e-12 |            |         |
| VJE        | 0.71      |            |         |
| MJE        | 0.38      |            |         |
| CJC        | 0.549e-12 |            |         |
| VJC        | 0.65      |            |         |

(1) Gummel-Poon Model

**UNITS**

| Parameter   | Units   |
|-------------|---------|
| time        | seconds |
| capacitance | farads  |
| inductance  | henries |
| resistance  | ohms    |
| voltage     | volts   |
| current     | amps    |


**ADDITIONAL PARAMETERS**

| Parameters | 68818     |
|------------|-----------|
| CCB        | 0.24e-12  |
| CCE        | 0.27e-12  |
| LB         | 0.9e-9    |
| LC         | 0.52e-9   |
| LE         | 0.7e-9    |
| CBCPKG     | 0.001e-12 |
| CCEPKG     | 0.07e-12  |
| CBEPKG     | 0.11e-12  |
| LBX        | 0.18e-9   |
| LCX        | 0.18e-9   |
| LEX        | 0.09e-9   |

**MODEL RANGE**

Frequency: 0.5 to 6.0 GHz  
 Bias: VCE = 1 V to 5 V, IC = 1 mA to 10 mA  
 Date: 5/97

**SCHEMATIC**

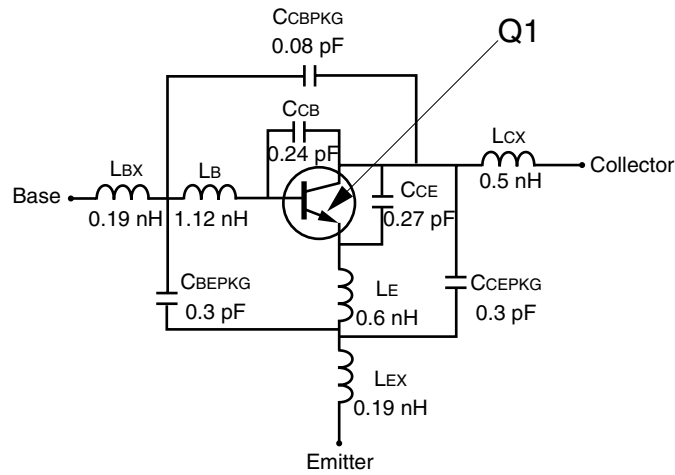

**BJT NONLINEAR MODEL PARAMETERS (1)**

| Parameters | Q1        | Parameters | Q1       |
|------------|-----------|------------|----------|
| IS         | 3.8e-16   | MJC        | 0.48     |
| BF         | 135.7     | XCJC       | 0.56     |
| NF         | 1         | CJS        | 0        |
| VAF        | 28        | VJS        | 0.75     |
| IKF        | 0.6       | MJS        | 0        |
| ISE        | 3.8e-15   | FC         | 0.75     |
| NE         | 1.49      | TF         | 11.0e-12 |
| BR         | 12.3      | XTF        | 0.36     |
| NR         | 1.1       | VTF        | 0.65     |
| VAR        | 3.5       | ITF        | 0.61     |
| IKR        | 0.06      | PTF        | 50       |
| ISC        | 3.5e-16   | TR         | 32e-12   |
| NC         | 1.62      | EG         | 1.11     |
| RE         | 0.4       | XTB        | 0        |
| RB         | 6.14      | XTI        | 3        |
| RBM        | 3.5       | KF         | 1.5e-14  |
| IRB        | 0.001     | AF         | 1.22     |
| RC         | 4.2       |            |          |
| CJE        | 0.796e-12 |            |          |
| VJE        | 0.71      |            |          |
| MJE        | 0.38      |            |          |
| CJC        | 0.549e-12 |            |          |
| VJC        | 0.65      |            |          |

(1) Gummel-Poon Model

**UNITS**

| Parameter   | Units   |
|-------------|---------|
| time        | seconds |
| capacitance | farads  |
| inductance  | henries |
| resistance  | ohms    |
| voltage     | volts   |
| current     | amps    |

**ADDITIONAL PARAMETERS**


| Parameters | 68819    |
|------------|----------|
| CcB        | 0.24e-12 |
| CcE        | 0.27e-12 |
| Lb         | 1.12e-9  |
| Le         | 0.6e-9   |
| CcBPKG     | 0.08e-12 |
| CcEPKG     | 0.3e-12  |
| CbEPKG     | 0.3e-12  |
| LbX        | 0.19e-9  |
| LcX        | 0.5e-9   |
| Lx         | 0.19e-9  |

**MODEL RANGE**

Frequency: 0.1 to 3 GHz  
 Bias: VCE = 1 V to 3 V, Ic = 1 mA to 10 mA  
 Date: 3/20/97

NE68830 NONLINEAR MODEL

SCHEMATIC

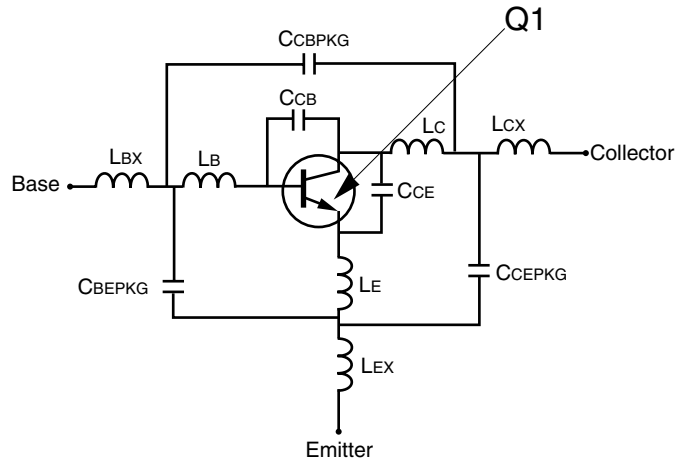

BJT NONLINEAR MODEL PARAMETERS (1)

| Parameters | Q1        | Parameters | Q1     |
|------------|-----------|------------|--------|
| IS         | 3.8e-16   | MJC        | 0.48   |
| BF         | 135.7     | XCJC       | 0.56   |
| NF         | 1         | CJS        | 0      |
| VAF        | 28        | VJS        | 0.75   |
| IKF        | 0.6       | MJS        | 0      |
| ISE        | 3.8e-15   | FC         | 0.75   |
| NE         | 1.49      | TF         | 11e-12 |
| BR         | 12.3      | XTF        | 0.36   |
| NR         | 1.1       | VTF        | 0.65   |
| VAR        | 3.5       | ITF        | 0.61   |
| IKR        | 0.06      | PTF        | 50     |
| ISC        | 3.5e-16   | TR         | 32e-12 |
| NC         | 1.62      | EG         | 1.11   |
| RE         | 0.4       | XTB        | 0      |
| RB         | 6.14      | XTI        | 3      |
| RBM        | 3.5       | KF         | 0      |
| IRB        | 0.001     | AF         | 1      |
| RC         | 4.2       |            |        |
| CJE        | 0.796e-12 |            |        |
| VJE        | 0.71      |            |        |
| MJE        | 0.38      |            |        |
| CJC        | 0.549e-12 |            |        |
| VJC        | 0.65      |            |        |

UNITS

| Parameter   | Units   |
|-------------|---------|
| time        | seconds |
| capacitance | farads  |
| inductance  | henries |
| resistance  | ohms    |
| voltage     | volts   |
| current     | amps    |

ADDITIONAL PARAMETERS

| Parameters | 68830    |
|------------|----------|
| CCB        | 0.24e-12 |
| CCE        | 0.27e-12 |
| LB         | 0.5e-9   |
| LE         | 0.86e-9  |
| CCBPKG     | 0.08e-12 |
| CCEPKG     | 0.04e-12 |
| CBEPKG     | 0.04e-12 |
| LBX        | 0.2e-9   |
| LCX        | 0.1e-9   |
| LEX        | 0.2e-9   |


MODEL RANGE

Frequency: 0.05 to 3.0 GHz  
 Bias: VCE = 1 V to 5 V, IC = 1 mA to 10 mA  
 Date: 10/11/96

(1) Gummel-Poon Model

NE68833 NONLINEAR MODEL

SCHEMATIC

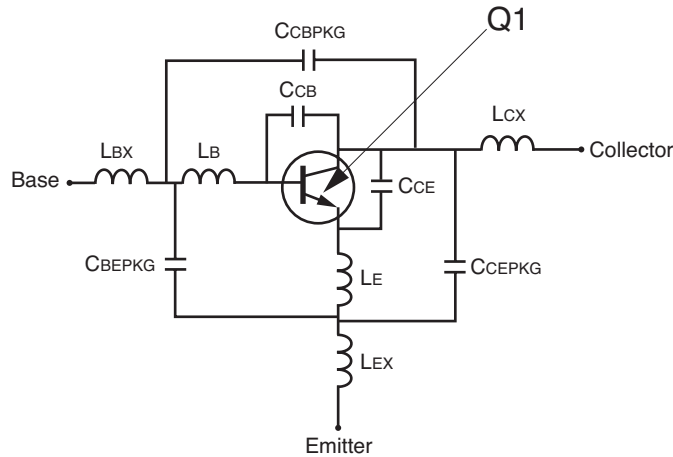

BJT NONLINEAR MODEL PARAMETERS (1)

| Parameters | Q1        | Parameters | Q1      |
|------------|-----------|------------|---------|
| IS         | 3.8e-16   | MJC        | 0.48    |
| BF         | 135.7     | XCJC       | 0.56    |
| NF         | 1         | CJS        | 0       |
| VAF        | 28        | VJS        | 0.75    |
| IKF        | 0.6       | MJS        | 0       |
| ISE        | 3.8e-15   | FC         | 0.75    |
| NE         | 1.49      | TF         | 11e-12  |
| BR         | 12.3      | XTF        | 0.36    |
| NR         | 1.1       | VTF        | 0.65    |
| VAR        | 3.5       | ITF        | 0.61    |
| IKR        | 0.06      | PTF        | 50      |
| ISC        | 3.5e-16   | TR         | 32e-12  |
| NC         | 1.62      | EG         | 1.11    |
| RE         | 0.4       | XTB        | 0       |
| RB         | 6.14      | XTI        | 3       |
| RBM        | 3.5       | KF         | 1.5e-14 |
| IRB        | 0.001     | AF         | 1.22    |
| RC         | 4.2       |            |         |
| CJE        | 0.796e-12 |            |         |
| VJE        | 0.71      |            |         |
| MJE        | 0.38      |            |         |
| CJC        | 0.549e-12 |            |         |
| VJC        | 0.65      |            |         |

(1) Gummel-Poon Model

UNITS

| Parameter   | Units   |
|-------------|---------|
| time        | seconds |
| capacitance | farads  |
| inductance  | henries |
| resistance  | ohms    |
| voltage     | volts   |
| current     | amps    |

ADDITIONAL PARAMETERS


| Parameters | 68833    |
|------------|----------|
| CCB        | 0.24e-12 |
| CCE        | 0.27e-12 |
| LB         | 0.77e-9  |
| LE         | 0.95e-9  |
| CCBPKG     | 0.15e-12 |
| CCEPKG     | 0.1e-12  |
| CBEPKG     | 0.1e-12  |
| LBX        | 0.3e-9   |
| LCX        | 0.4e-9   |
| LEX        | 0.3e-9   |

MODEL RANGE

Frequency: 0.05 to 5.0 GHz  
 Bias:  $V_{CE} = 1\text{ V to }5\text{ V}$ ,  $I_c = 1\text{ mA to }10\text{ mA}$   
 Date: 8/03

NE68839 NONLINEAR MODEL

SCHEMATIC

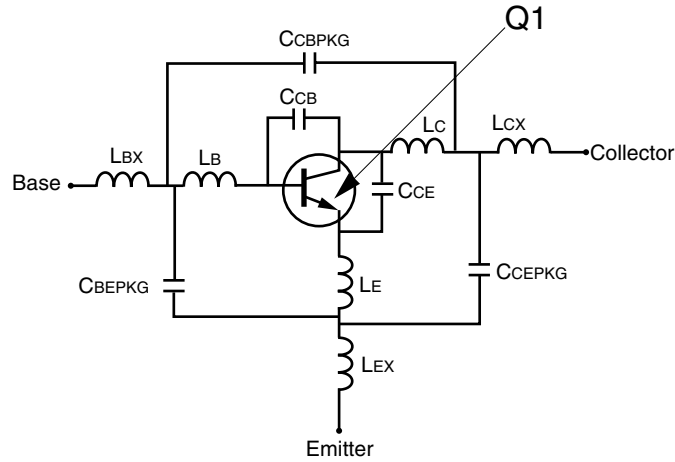

BJT NONLINEAR MODEL PARAMETERS (1)

| Parameters | Q1        | Parameters | Q1       |
|------------|-----------|------------|----------|
| IS         | 3.8e-16   | MJC        | 0.48     |
| BF         | 135.7     | XCJC       | 0.56     |
| NF         | 1         | CJS        | 0        |
| VAF        | 28        | VJS        | 0.75     |
| IKF        | 0.6       | MJS        | 0        |
| ISE        | 3.8e-15   | FC         | 0.75     |
| NE         | 1.49      | TF         | 11e-12   |
| BR         | 12.3      | XTF        | 0.36     |
| NR         | 1.1       | VTF        | 0.65     |
| VAR        | 3.5       | ITF        | 0.61     |
| IKR        | 0.06      | PTF        | 50       |
| ISC        | 3.5e-16   | TR         | 0.032e-9 |
| NC         | 1.62      | EG         | 1.11     |
| RE         | 0.4       | XTB        | 0        |
| RB         | 6.14      | XTI        | 3        |
| RBM        | 3.5       | KF         | 0        |
| IRB        | 0.001     | AF         | 1        |
| RC         | 4.2       |            |          |
| CJE        | 0.796e-12 |            |          |
| VJE        | 0.71      |            |          |
| MJE        | 0.38      |            |          |
| CJC        | 0.549e-12 |            |          |
| VJC        | 0.65      |            |          |

(1) Gummel-Poon Model

UNITS

| Parameter   | Units   |
|-------------|---------|
| time        | seconds |
| capacitance | farads  |
| inductance  | henries |
| resistance  | ohms    |
| voltage     | volts   |
| current     | amps    |


ADDITIONAL PARAMETERS

| Parameters | 68839     |
|------------|-----------|
| CcB        | 0.24e-12  |
| CcE        | 0.27e-12  |
| Lb         | 0.9e-9    |
| Lc         | 0.47e-9   |
| Le         | 0.6e-9    |
| CcBPKG     | 0.085e-12 |
| CcEPKG     | 0.07e-12  |
| CbEPKG     | 0.01e-12  |
| LbX        | 0.39e-9   |
| LcX        | 0.39e-9   |
| LEx        | 0.2e-9    |



MODEL RANGE

Frequency: 0.05 to 5.0 GHz  
 Bias: VCE = 0.5 V to 5 V, IC = 0.5 mA to 10 mA  
 Date: 10/3/96



OUTLINE DIMENSIONS (Units in mm)

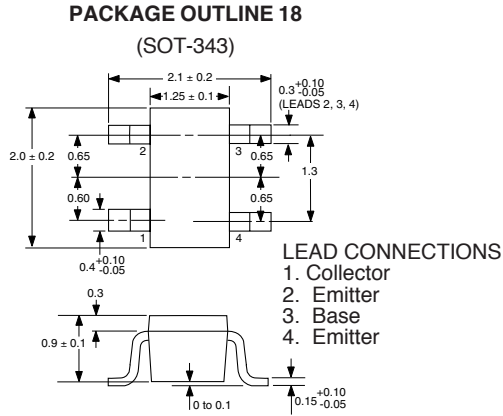



**OUTLINE 18**  
RECOMMENDED P.C.B. LAYOUT

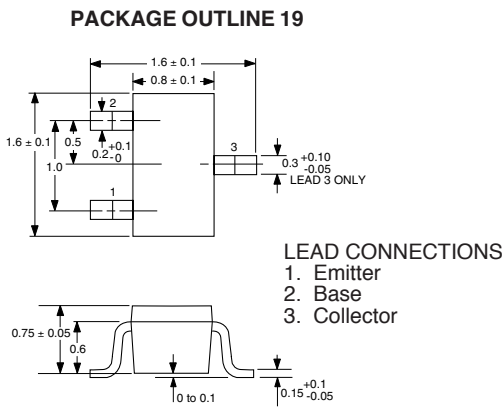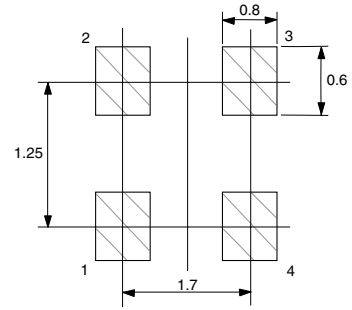


**OUTLINE 19**  
RECOMMENDED P.C.B. LAYOUT

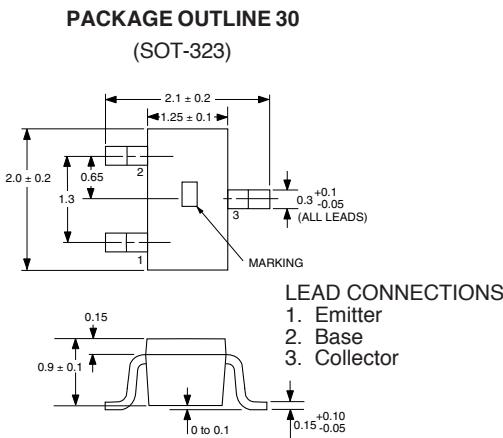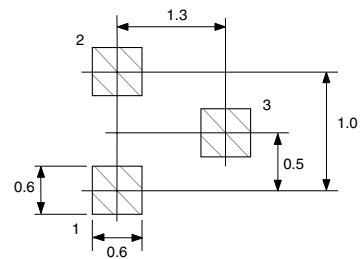

**OUTLINE 30**  
RECOMMENDED P.C.B. LAYOUT

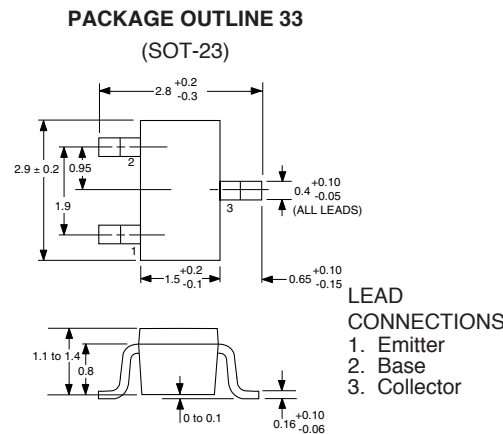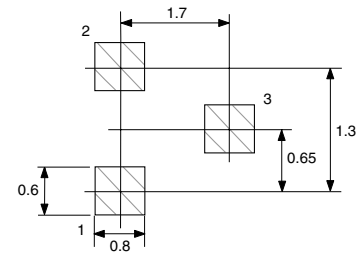


**OUTLINE 33**  
RECOMMENDED P.C.B. LAYOUT




**OUTLINE DIMENSIONS** (Units in mm)

**PACKAGE OUTLINE 39**  
(SOT-143)

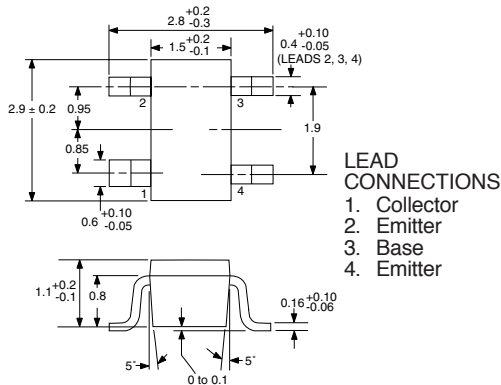


- LEAD CONNECTIONS**
1. Collector
  2. Emitter
  3. Base
  4. Emitter

**PACKAGE OUTLINE 39R**

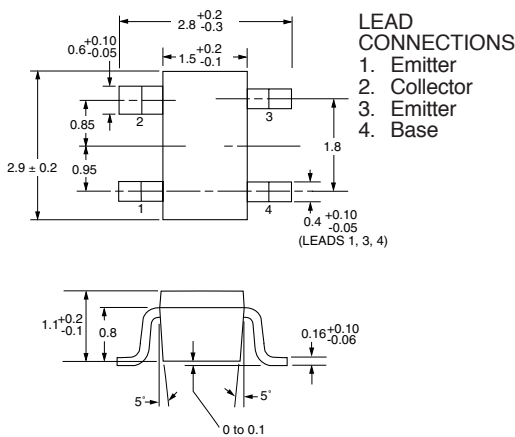


- LEAD CONNECTIONS**
1. Emitter
  2. Collector
  3. Emitter
  4. Base

**OUTLINE 39**  
**RECOMMENDED P.C.B. LAYOUT**



**OUTLINE 39R**  
**RECOMMENDED P.C.B. LAYOUT**



**ORDERING INFORMATION**

| PART NUMBER  | QUANTITY | PACKAGING   |
|--------------|----------|-------------|
| NE68800      | 100      | Waffle Pack |
| NE68818-T1-A | 3000     | Tape & Reel |
| NE68819-T1-A | 3000     | Tape & Reel |
| NE68830-T1-A | 3000     | Tape & Reel |
| NE68833-T1-A | 3000     | Tape & Reel |
| NE68839-T1-A | 3000     | Tape & Reel |
| NE68839R-T1  | 3000     | Tape & Reel |

**Note:**

1. Lead material: Cu  
Lead plating: PbSn

**Life Support Applications**

These NEC products are not intended for use in life support devices, appliances, or systems where the malfunction of these products can reasonably be expected to result in personal injury. The customers of CEL using or selling these products for use in such applications do so at their own risk and agree to fully indemnify CEL for all damages resulting from such improper use or sale.

**CEL** California Eastern Laboratories, Your source for NEC RF, Microwave, Optoelectronic, and Fiber Optic Semiconductor Devices.

4590 Patrick Henry Drive • Santa Clara, CA 95054-1817 • (408) 988-3500 • FAX (408) 988-0279 • [www.cel.com](http://www.cel.com)

DATA SUBJECT TO CHANGE WITHOUT NOTICE

05/18/2005

Subject: Compliance with EU Directives

CEL certifies, to its knowledge, that semiconductor and laser products detailed below are compliant with the requirements of European Union (EU) Directive 2002/95/EC Restriction on Use of Hazardous Substances in electrical and electronic equipment (RoHS) and the requirements of EU Directive 2003/11/EC Restriction on Penta and Octa BDE.

CEL Pb-free products have the same base part number with a suffix added. The suffix –A indicates that the device is Pb-free. The –AZ suffix is used to designate devices containing Pb which are exempted from the requirement of RoHS directive (\*). In all cases the devices have Pb-free terminals. All devices with these suffixes meet the requirements of the RoHS directive.

This status is based on CEL’s understanding of the EU Directives and knowledge of the materials that go into its products as of the date of disclosure of this information.

| Restricted Substance per RoHS | Concentration Limit per RoHS (values are not yet fixed) | Concentration contained in CEL devices |     |
|-------------------------------|---|--|-----|
|                               |   | -A                                     | -AZ |
| Lead (Pb)                     | < 1000 PPM  | Not Detected                           | (*) |
| Mercury                       | < 1000 PPM  | Not Detected                           |     |
| Cadmium                       | < 100 PPM   | Not Detected                           |     |
| Hexavalent Chromium           | < 1000 PPM  | Not Detected                           |     |
| PBB                           | < 1000 PPM  | Not Detected                           |     |
| PBDE                          | < 1000 PPM  | Not Detected                           |     |

If you should have any additional questions regarding our devices and compliance to environmental standards, please do not hesitate to contact your local representative.

Important Information and Disclaimer: Information provided by CEL on its website or in other communications concerning the substance content of its products represents knowledge and belief as of the date that it is provided. CEL bases its knowledge and belief on information provided by third parties and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. CEL has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. CEL and CEL suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.


In no event shall CEL’s liability arising out of such information exceed the total purchase price of the CEL part(s) at issue sold by CEL to customer on an annual basis.

See CEL Terms and Conditions for additional clarification of warranties and liability.

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View NE68819-T1-A on WIN SOURCE](#)

 [CEL Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management