



**THE DATASHEET OF
PL104-4G13**



P-tec Corp. Tel:(866) 695 4162
 2405 Commerce Circle Tel:(719) 589 3122
 Alamosa CO 81101 Fax:(719) 589 3592
 www.p-tec.net



PL104 Series 1.8mm Miniature Quad Level LED Holder

Features

- *Miniature Quad Level LED Holder, Right Angled
- *Space saving Circuit Board Indicator
- *High Light Output
- *Housing Material Black Nylon UL94V-2
- *4 Green LEDs with Color Diffused Lens used
- *LEDs arranged from Top to Bottom
- *RoHS Compliant


Absolute Maximum Ratings at $T_A = 25^\circ\text{C}$

Power Dissipation.....	78mW
Reverse Voltage (<math><100 \mu\text{A}</math>).....	5.0V
Max Forward Current.....	30mA
Peak Forward Current (1/10 Duty Cycle, 0.1ms Pulse Width).....	100mA
Operating Temperature Range.....	-25°C to $+85^\circ\text{C}$
Storage Temperature Range.....	-40°C to $+100^\circ\text{C}$
Soldering Temperature (1.6 mm below body).....	260°C for 5 seconds

Electrical & Optical Characteristics at $T_A = 25^\circ\text{C}$

Part Number	Emitting Color	Chip Material	Peak Wave Length	Dominant Wave Length	Viewing Angle $2\theta_{1/2}$	Forward Voltage @20mA (V)		Luminous Intensity @20mA (mcd)	
						Typ	Max	Min	Typ
Color Diffused Lens			nm	nm	Deg				
PL104-4G13	Green	GaP	567	572	30°	2.1	2.6	25.0	45.0

All dimensions are in **Millimeters**. Tolerance is $\pm 0.5\text{mm}$ unless otherwise specified.

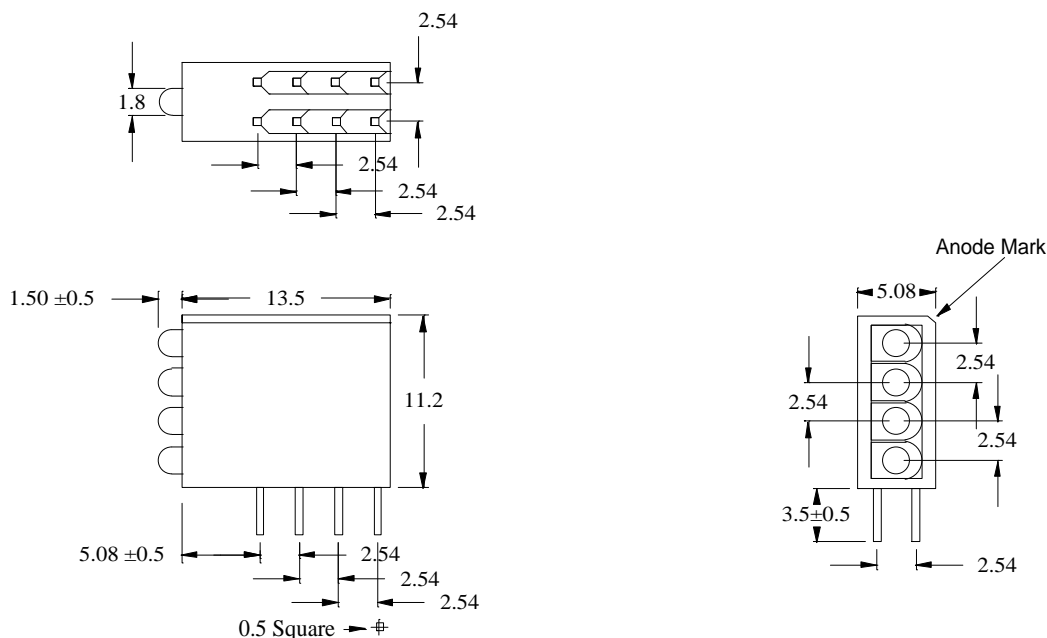

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View PL104-4G13 on WIN SOURCE](#)

 [P-tec Corporation Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management