



# THE DATASHEET OF AP2121AK-1.5TRG1

**HIGH SPEED, EXTREMELY LOW NOISE LDO REGULATOR****AP2121****General Description**

The AP2121 series are positive voltage regulator ICs fabricated by CMOS process. Each of these ICs consists of a voltage reference, an error amplifier, a resistor network for setting output voltage, a current limit circuit for current protection and a chip-enable circuit (5-pin products only).

The AP2121 series feature high supply voltage ripple rejection, low dropout voltage, low noise, high output voltage accuracy, and low current consumption which make them ideal for use in various battery-powered devices.

The AP2121 series have 1.2V, 1.3V, 1.5V, 1.8V, 2.5V, 2.8V, 2.85V, 3.0V, 3.2V and 3.3V versions.

The AP2121 are available in standard SOT-23-3, SOT-23-5 and CSP-4 packages.

**Features**

- Low Dropout Voltage at  $I_{OUT}=100mA$ : 150mV Typical (Except 1.2V, 1.3V and 1.5V Versions)
- Low Standby Current: 0.1 $\mu A$  Typical
- Low Quiescent Current: 25 $\mu A$  Typical
- High Ripple Rejection: 70dB Typical ( $f=1kHz$ )
- Output Current: More Than 200mA (300mA Limit)
- Extremely Low Noise: 30 $\mu V_{rms}$  (10Hz to 100kHz)
- Excellent Line Regulation: 4mV Typical
- Excellent Load Regulation: 12mV Typical
- High Output Voltage Accuracy:  $\pm 2\%$
- Excellent Line Transient Response and Load Transient Response
- Compatible with Low ESR Ceramic Capacitor (as Low as 1 $\mu F$ )

**Applications**

- Mobile Phones, Cordless Phones
- Wireless Communication Equipment
- Portable Games
- Cameras, Video Recorders
- Sub-board Power Supplies for Telecom Equipment
- Battery Powered Equipment

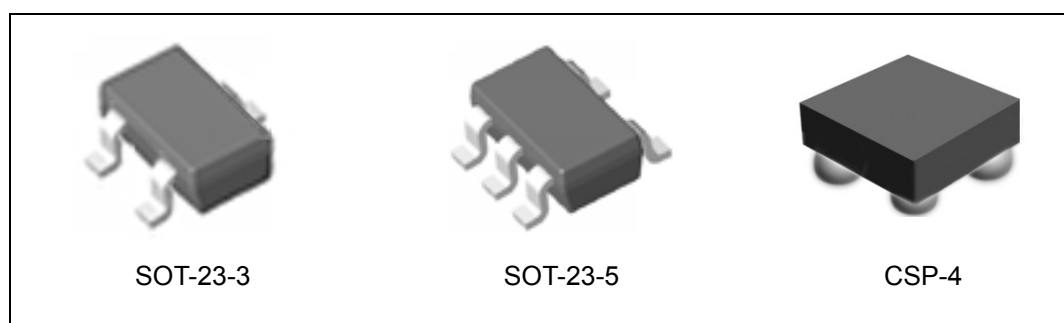


Figure 1. Package Types of AP2121

# HIGH SPEED, EXTREMELY LOW NOISE LDO REGULATOR

AP2121

## Pin Configuration

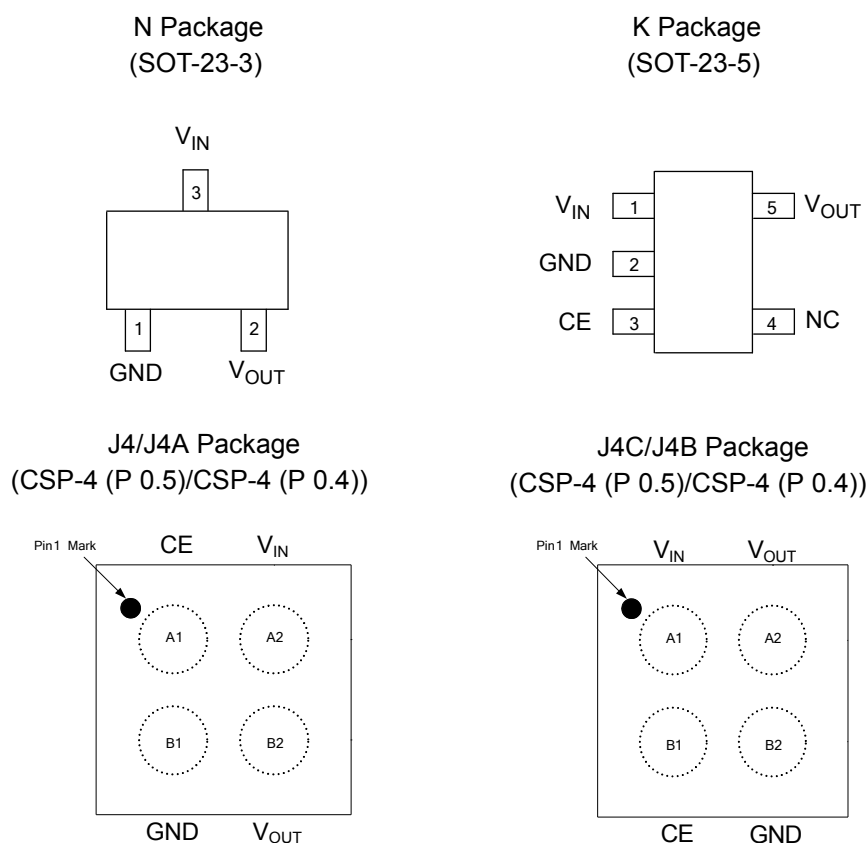


Figure 2. Pin Configuration of AP2121 (Top View)

## Pin Description

| Pin Number |          |                |                 | Pin Name         | Function                                                            |
|------------|----------|----------------|-----------------|------------------|---------------------------------------------------------------------|
| SOT-23-3   | SOT-23-5 | CSP-4 (J4/J4A) | CSP-4 (J4C/J4B) |                  |                                                                     |
| 3          | 1        | A2             | A1              | V <sub>IN</sub>  | Input voltage                                                       |
| 1          | 2        | B1             | B2              | GND              | Ground                                                              |
|            | 3        | A1             | B1              | CE               | Active high enable input pin. Logic high=enable, logic low=shutdown |
|            | 4        |                |                 | NC               | No connection                                                       |
| 2          | 5        | B2             | A2              | V <sub>OUT</sub> | Regulated output voltage                                            |

# HIGH SPEED, EXTREMELY LOW NOISE LDO REGULATOR

AP2121

## Functional Block Diagram

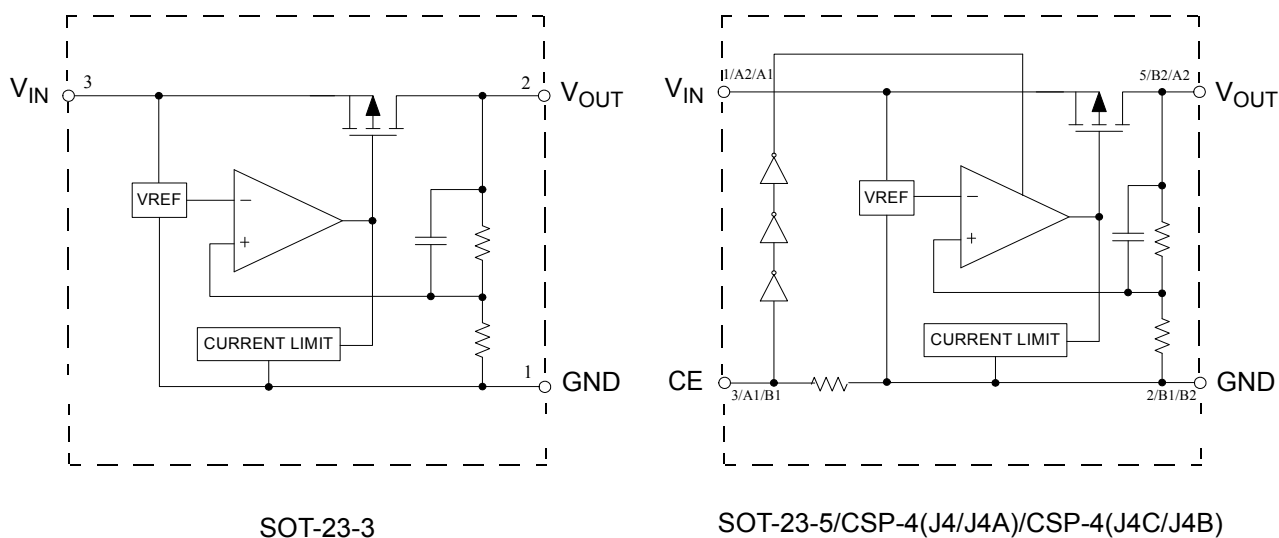



Figure 3. Functional Block Diagram of AP2121



# HIGH SPEED, EXTREMELY LOW NOISE LDO REGULATOR

AP2121

## Ordering Information

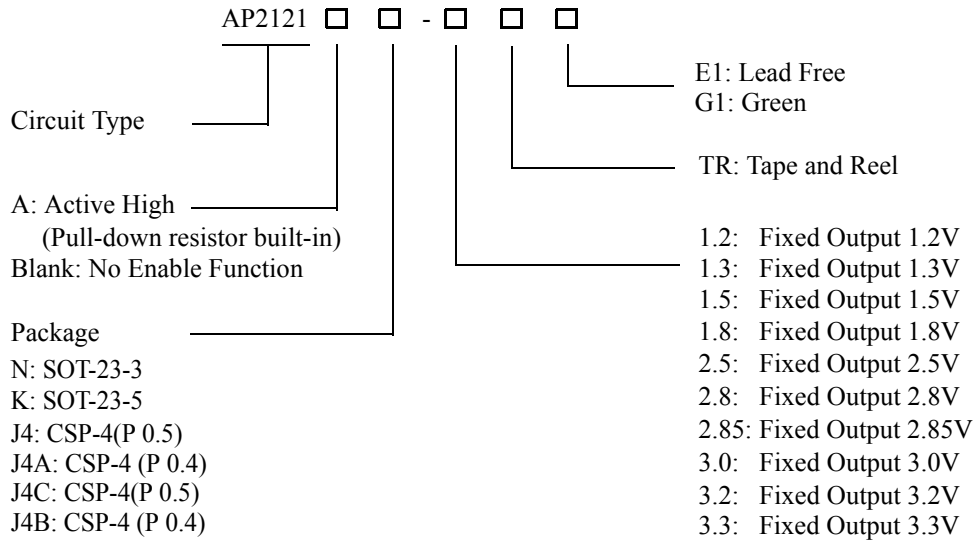

| Package  | Temperature Range | Condition                                 | Part Number      |                  | Marking ID |       | Packing Type |
|----------|-------------------|-------------------------------------------|------------------|------------------|------------|-------|--------------|
|          |                   |                                           | Lead Free        | Green            | Lead Free  | Green |              |
| SOT-23-3 | -40 to 85°C       |                                           | AP2121N-1.2TRE1  | AP2121N-1.2TRG1  | EF9        | GF9   | Tape & Reel  |
|          |                   |                                           | AP2121N-1.3TRE1  | AP2121N-1.3TRG1  | EG9        | GG9   | Tape & Reel  |
|          |                   |                                           | AP2121N-1.5TRE1  | AP2121N-1.5TRG1  | EF1        | GF1   | Tape & Reel  |
|          |                   |                                           | AP2121N-1.8TRE1  | AP2121N-1.8TRG1  | EF3        | GF3   | Tape & Reel  |
|          |                   |                                           | AP2121N-2.5TRE1  | AP2121N-2.5TRG1  | EF4        | GF4   | Tape & Reel  |
|          |                   |                                           | AP2121N-2.8TRE1  | AP2121N-2.8TRG1  | EF5        | GF5   | Tape & Reel  |
|          |                   |                                           | AP2121N-3.0TRE1  | AP2121N-3.0TRG1  | EF6        | GF6   | Tape & Reel  |
|          |                   |                                           | AP2121N-3.2TRE1  | AP2121N-3.2TRG1  | EF7        | GF7   | Tape & Reel  |
|          |                   |                                           | AP2121N-3.3TRE1  | AP2121N-3.3TRG1  | EF8        | GF8   | Tape & Reel  |
| SOT-23-5 | -40 to 85°C       | Active High (Pull-down resistor built-in) | AP2121AK-1.2TRE1 | AP2121AK-1.2TRG1 | E1T        | G1T   | Tape & Reel  |
|          |                   | Active High (Pull-down resistor built-in) | AP2121AK-1.3TRE1 | AP2121AK-1.3TRG1 | E1R        | G1R   | Tape & Reel  |
|          |                   | Active High (Pull-down resistor built-in) | AP2121AK-1.5TRE1 | AP2121AK-1.5TRG1 | E1Z        | G1Z   | Tape & Reel  |
|          |                   | Active High (Pull-down resistor built-in) | AP2121AK-1.8TRE1 | AP2121AK-1.8TRG1 | E1U        | G1U   | Tape & Reel  |
|          |                   | Active High (Pull-down resistor built-in) | AP2121AK-2.5TRE1 | AP2121AK-2.5TRG1 | E1V        | G1V   | Tape & Reel  |
|          |                   | Active High (Pull-down resistor built-in) | AP2121AK-2.8TRE1 | AP2121AK-2.8TRG1 | E1W        | G1W   | Tape & Reel  |
|          |                   | Active High (Pull-down resistor built-in) | AP2121AK-3.0TRE1 | AP2121AK-3.0TRG1 | E1X        | G1X   | Tape & Reel  |
|          |                   | Active High (Pull-down resistor built-in) | AP2121AK-3.2TRE1 | AP2121AK-3.2TRG1 | E3Z        | G3Z   | Tape & Reel  |
|          |                   | Active High (Pull-down resistor built-in) | AP2121AK-3.3TRE1 | AP2121AK-3.3TRG1 | E1Y        | G1Y   | Tape & Reel  |



# HIGH SPEED, EXTREMELY LOW NOISE LDO REGULATOR

AP2121

## Ordering Information (Continued)

| Package | Temperature Range | Condition | Part Number |                     | Marking ID |       | Packing Type |
|---------|-------------------|-----------|-------------|---------------------|------------|-------|--------------|
|         |                   |           | Lead Free   | Green               | Lead Free  | Green |              |
| CSP-4   | -40 to 85°C       | 0.4 Pitch |             | AP2121AJ4A-1.2TRG1  |            | CB    | Tape & Reel  |
|         |                   | 0.4 Pitch |             | AP2121AJ4A-1.3TRG1  |            | CC    | Tape & Reel  |
|         |                   | 0.4 Pitch |             | AP2121AJ4A-1.5TRG1  |            | CD    | Tape & Reel  |
|         |                   | 0.4 Pitch |             | AP2121AJ4A-1.8TRG1  |            | CE    | Tape & Reel  |
|         |                   | 0.4 Pitch |             | AP2121AJ4A-2.5TRG1  |            | CF    | Tape & Reel  |
|         |                   | 0.4 Pitch |             | AP2121AJ4A-2.8TRG1  |            | CG    | Tape & Reel  |
|         |                   | 0.4 Pitch |             | AP2121AJ4A-2.85TRG1 |            | DD    | Tape & Reel  |
|         |                   | 0.4 Pitch |             | AP2121AJ4A-3.0TRG1  |            | CH    | Tape & Reel  |
|         |                   | 0.4 Pitch |             | AP2121AJ4A-3.2TRG1  |            | DA    | Tape & Reel  |
|         |                   | 0.4 Pitch |             | AP2121AJ4A-3.3TRG1  |            | DB    | Tape & Reel  |
| CSP-4   | -40 to 85°C       | 0.5 Pitch |             | AP2121AJ4-1.2TRG1   |            | BA    | Tape & Reel  |
|         |                   | 0.5 Pitch |             | AP2121AJ4-1.3TRG1   |            | BB    | Tape & Reel  |
|         |                   | 0.5 Pitch |             | AP2121AJ4-1.5TRG1   |            | BC    | Tape & Reel  |
|         |                   | 0.5 Pitch |             | AP2121AJ4-1.8TRG1   |            | BD    | Tape & Reel  |
|         |                   | 0.5 Pitch |             | AP2121AJ4-2.5TRG1   |            | BE    | Tape & Reel  |
|         |                   | 0.5 Pitch |             | AP2121AJ4-2.8TRG1   |            | BF    | Tape & Reel  |
|         |                   | 0.5 Pitch |             | AP2121AJ4-2.85TRG1  |            | DC    | Tape & Reel  |
|         |                   | 0.5 Pitch |             | AP2121AJ4-3.0TRG1   |            | BG    | Tape & Reel  |
|         |                   | 0.5 Pitch |             | AP2121AJ4-3.2TRG1   |            | BH    | Tape & Reel  |
|         |                   | 0.5 Pitch |             | AP2121AJ4-3.3TRG1   |            | CA    | Tape & Reel  |



# HIGH SPEED, EXTREMELY LOW NOISE LDO REGULATOR

AP2121

## Ordering Information (Continued)

| Package | Temperature Range | Condition | Part Number |                     | Marking ID |       | Packing Type |
|---------|-------------------|-----------|-------------|---------------------|------------|-------|--------------|
|         |                   |           | Lead Free   | Green               | Lead Free  | Green |              |
| CSP-4   | -40 to 85°C       | 0.4 Pitch |             | AP2121AJ4B-1.2TRG1  |            | DE    | Tape & Reel  |
|         |                   | 0.4 Pitch |             | AP2121AJ4B-1.3TRG1  |            | DF    | Tape & Reel  |
|         |                   | 0.4 Pitch |             | AP2121AJ4B-1.5TRG1  |            | DG    | Tape & Reel  |
|         |                   | 0.4 Pitch |             | AP2121AJ4B-1.8TRG1  |            | DH    | Tape & Reel  |
|         |                   | 0.4 Pitch |             | AP2121AJ4B-2.5TRG1  |            | EA    | Tape & Reel  |
|         |                   | 0.4 Pitch |             | AP2121AJ4B-2.8TRG1  |            | EB    | Tape & Reel  |
|         |                   | 0.4 Pitch |             | AP2121AJ4B-2.85TRG1 |            | EC    | Tape & Reel  |
|         |                   | 0.4 Pitch |             | AP2121AJ4B-3.0TRG1  |            | ED    | Tape & Reel  |
|         |                   | 0.4 Pitch |             | AP2121AJ4B-3.2TRG1  |            | EE    | Tape & Reel  |
|         |                   | 0.4 Pitch |             | AP2121AJ4B-3.3TRG1  |            | EF    | Tape & Reel  |
| CSP-4   | -40 to 85°C       | 0.5 Pitch |             | AP2121AJ4C-1.2TRG1  |            | EG    | Tape & Reel  |
|         |                   | 0.5 Pitch |             | AP2121AJ4C-1.3TRG1  |            | EH    | Tape & Reel  |
|         |                   | 0.5 Pitch |             | AP2121AJ4C-1.5TRG1  |            | FA    | Tape & Reel  |
|         |                   | 0.5 Pitch |             | AP2121AJ4C-1.8TRG1  |            | FB    | Tape & Reel  |
|         |                   | 0.5 Pitch |             | AP2121AJ4C-2.5TRG1  |            | FC    | Tape & Reel  |
|         |                   | 0.5 Pitch |             | AP2121AJ4C-2.8TRG1  |            | FD    | Tape & Reel  |
|         |                   | 0.5 Pitch |             | AP2121AJ4C-2.85TRG1 |            | FE    | Tape & Reel  |
|         |                   | 0.5 Pitch |             | AP2121AJ4C-3.0TRG1  |            | FF    | Tape & Reel  |
|         |                   | 0.5 Pitch |             | AP2121AJ4C-3.2TRG1  |            | FG    | Tape & Reel  |
|         |                   | 0.5 Pitch |             | AP2121AJ4C-3.3TRG1  |            | FH    | Tape & Reel  |

BCD Semiconductor's Pb-free products, as designated with "E1" suffix in the part number, are RoHS compliant. Products with "G1" suffix are available in green packages.

**HIGH SPEED, EXTREMELY LOW NOISE LDO REGULATOR****AP2121****Absolute Maximum Ratings (Note 1)**

| Parameter                                            | Symbol        | Value                |     | Unit |
|------------------------------------------------------|---------------|----------------------|-----|------|
| Input Voltage                                        | $V_{IN}$      | 6.5                  |     | V    |
| Enable Input Voltage                                 | $V_{CE}$      | -0.3 to $V_{IN}+0.3$ |     | V    |
| Output Current                                       | $I_{OUT}$     | 300                  |     | mA   |
| Junction Temperature                                 | $T_J$         | 150                  |     | °C   |
| Storage Temperature Range                            | $T_{STG}$     | -65 to 150           |     | °C   |
| Lead Temperature (Soldering, 10sec)                  | $T_{LEAD}$    | 260                  |     | °C   |
| Thermal Resistance (Junction to Ambient)<br>(Note 2) | $\theta_{JA}$ | SOT-23-3             | 250 | °C/W |
|                                                      |               | SOT-23-5             | 250 |      |
|                                                      |               | CSP-4                | 126 |      |
| ESD (Human Body Model)                               | ESD           | 2000                 |     | V    |
| ESD (Machine Model)                                  | ESD           | 200                  |     | V    |

Note 1: Stresses greater than those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "Recommended Operating Conditions" is not implied. Exposure to "Absolute Maximum Ratings" for extended periods may affect device reliability.

Note 2: Absolute maximum ratings indicate limits beyond which damage to the component may occur. Electrical specifications do not apply when operating the device outside of its operating ratings. The maximum allowable power dissipation is a function of the maximum junction temperature,  $T_{J(max)}$ , the junction-to-ambient thermal resistance,  $\theta_{JA}$ , and the ambient temperature,  $T_A$ . The maximum allowable power dissipation at any ambient temperature is calculated using:  $P_{D(max)} = (T_{J(max)} - T_A) / \theta_{JA}$ . Exceeding the maximum allowable power dissipation will result in excessive die temperature.

**Recommended Operating Conditions**

| Parameter                           | Symbol   | Min | Max | Unit |
|-------------------------------------|----------|-----|-----|------|
| Input Voltage                       | $V_{IN}$ | 2   | 6   | V    |
| Operating Ambient Temperature Range | $T_A$    | -40 | 85  | °C   |



# HIGH SPEED, EXTREMELY LOW NOISE LDO REGULATOR

AP2121

## Electrical Characteristics

### AP2121-1.2 Electrical Characteristics

( $V_{IN}=2.2V$ ,  $T_J=25^{\circ}C$ ,  $C_{IN}=1\mu F$ ,  $C_{OUT}=1\mu F$ , **Bold** typeface applies over  $-40^{\circ}C \leq T_J \leq 85^{\circ}C$ , unless otherwise specified.)

| Parameter                              | Symbol                              | Conditions                                     | Min   | Typ       | Max   | Unit              |
|----------------------------------------|-------------------------------------|------------------------------------------------|-------|-----------|-------|-------------------|
| Output Voltage                         | $V_{OUT}$                           | $V_{IN}=2.2V$<br>$1mA \leq I_{OUT} \leq 30mA$  | 1.176 | 1.2       | 1.224 | V                 |
| Input Voltage                          | $V_{IN}$                            |                                                |       |           | 6     | V                 |
| Output Current                         | $I_{OUT}$                           | $V_{IN}-V_{OUT}=1V$                            | 200   |           |       | mA                |
| Load Regulation                        | $V_{RLOAD}$                         | $V_{IN}=2.2V$<br>$1mA \leq I_{OUT} \leq 80mA$  |       | 12        | 40    | mV                |
| Line Regulation                        | $V_{RLINE}$                         | $2.2V \leq V_{IN} \leq 6V$<br>$I_{OUT}=30mA$   |       | 4         | 16    | mV                |
| Dropout Voltage                        | $V_{DROP}$                          | $I_{OUT}=10mA$                                 |       | 700       | 900   | mV                |
|                                        |                                     | $I_{OUT}=100mA$                                |       | 700       | 900   |                   |
|                                        |                                     | $I_{OUT}=150mA$                                |       | 700       | 900   |                   |
|                                        |                                     | $I_{OUT}=200mA$                                |       | 700       | 900   |                   |
| Quiescent Current                      | $I_Q$                               | $V_{IN}=2.2V$ , $I_{OUT}=0mA$                  |       | 25        | 50    | $\mu A$           |
| Standby Current                        | $I_{STD}$                           | $V_{IN}=2.2V$<br>$V_{CE}$ in OFF mode          |       | 0.1       | 1     | $\mu A$           |
| Power Supply Rejection Ratio           | PSRR                                | Ripple 0.5Vp-p, $f=1kHz$<br>$V_{IN}=2.2V$      |       | 70        |       | dB                |
| Output Voltage Temperature Coefficient | $\Delta V_{OUT}/\Delta T$           | $I_{OUT}=30mA$                                 |       | $\pm 120$ |       | $\mu V/^{\circ}C$ |
|                                        | $(\Delta V_{OUT}/V_{OUT})/\Delta T$ |                                                |       | $\pm 100$ |       | ppm/ $^{\circ}C$  |
| Short Current Limit                    | $I_{LIMIT}$                         | $V_{OUT}=0V$                                   |       | 50        |       | mA                |
| RMS Output Noise                       | $V_{NOISE}$                         | $T_A=25^{\circ}C$<br>$10Hz \leq f \leq 100kHz$ |       | 30        |       | $\mu V_{rms}$     |
| CE "High" Voltage                      |                                     | CE input voltage "High"                        | 1.5   |           |       | V                 |
| CE "Low" Voltage                       |                                     | CE input voltage "Low"                         |       |           | 0.25  | V                 |
| CE Pull-down Resistance                | $R_{PD}$                            |                                                | 2.5   | 5         | 10    | $M\Omega$         |
| Thermal Resistance (Junction to Case)  | $\theta_{JC}$                       | SOT-23-3                                       |       | 74        |       | $^{\circ}C/W$     |
|                                        |                                     | SOT-23-5                                       |       | 74        |       |                   |
|                                        |                                     | CSP-4                                          |       | 5         |       |                   |



# HIGH SPEED, EXTREMELY LOW NOISE LDO REGULATOR

AP2121

## Electrical Characteristics (Continued)

### AP2121-1.3 Electrical Characteristics

( $V_{IN}=2.3V$ ,  $T_J=25^{\circ}C$ ,  $C_{IN}=1\mu F$ ,  $C_{OUT}=1\mu F$ , **Bold** typeface applies over  $-40^{\circ}C \leq T_J \leq 85^{\circ}C$ , unless otherwise specified.)

| Parameter                              | Symbol                              | Conditions                                     | Min   | Typ       | Max   | Unit              |
|----------------------------------------|-------------------------------------|------------------------------------------------|-------|-----------|-------|-------------------|
| Output Voltage                         | $V_{OUT}$                           | $V_{IN}=2.3V$<br>$1mA \leq I_{OUT} \leq 30mA$  | 1.274 | 1.3       | 1.326 | V                 |
| Input Voltage                          | $V_{IN}$                            |                                                |       |           | 6     | V                 |
| Output Current                         | $I_{OUT}$                           | $V_{IN}-V_{OUT}=1V$                            | 200   |           |       | mA                |
| Load Regulation                        | $V_{RLOAD}$                         | $V_{IN}=2.3V$<br>$1mA \leq I_{OUT} \leq 80mA$  |       | 12        | 40    | mV                |
| Line Regulation                        | $V_{RLINE}$                         | $2.3V \leq V_{IN} \leq 6V$<br>$I_{OUT}=30mA$   |       | 4         | 16    | mV                |
| Dropout Voltage                        | $V_{DROP}$                          | $I_{OUT}=10mA$                                 |       | 600       | 800   | mV                |
|                                        |                                     | $I_{OUT}=100mA$                                |       | 600       | 800   |                   |
|                                        |                                     | $I_{OUT}=150mA$                                |       | 600       | 800   |                   |
|                                        |                                     | $I_{OUT}=200mA$                                |       | 600       | 800   |                   |
| Quiescent Current                      | $I_Q$                               | $V_{IN}=2.3V$ , $I_{OUT}=0mA$                  |       | 25        | 50    | $\mu A$           |
| Standby Current                        | $I_{STD}$                           | $V_{IN}=2.3V$<br>$V_{CE}$ in OFF mode          |       | 0.1       | 1     | $\mu A$           |
| Power Supply Rejection Ratio           | PSRR                                | Ripple 0.5Vp-p, $f=1kHz$<br>$V_{IN}=2.3V$      |       | 70        |       | dB                |
| Output Voltage Temperature Coefficient | $\Delta V_{OUT}/\Delta T$           | $I_{OUT}=30mA$                                 |       | $\pm 130$ |       | $\mu V/^{\circ}C$ |
|                                        | $(\Delta V_{OUT}/V_{OUT})/\Delta T$ |                                                |       | $\pm 100$ |       | ppm/ $^{\circ}C$  |
| Short Current Limit                    | $I_{LIMIT}$                         | $V_{OUT}=0V$                                   |       | 50        |       | mA                |
| RMS Output Noise                       | $V_{NOISE}$                         | $T_A=25^{\circ}C$<br>$10Hz \leq f \leq 100kHz$ |       | 30        |       | $\mu V_{rms}$     |
| CE "High" Voltage                      |                                     | CE input voltage "High"                        | 1.5   |           |       | V                 |
| CE "Low" Voltage                       |                                     | CE input voltage "Low"                         |       |           | 0.25  | V                 |
| CE Pull-down Resistance                | $R_{PD}$                            |                                                | 2.5   | 5         | 10    | $M\Omega$         |
| Thermal Resistance (Junction to Case)  | $\theta_{JC}$                       | SOT-23-3                                       |       | 74        |       | $^{\circ}C/W$     |
|                                        |                                     | SOT-23-5                                       |       | 74        |       |                   |
|                                        |                                     | CSP-4                                          |       | 5         |       |                   |



# HIGH SPEED, EXTREMELY LOW NOISE LDO REGULATOR

AP2121

## Electrical Characteristics (Continued)

### AP2121-1.5 Electrical Characteristics

( $V_{IN}=2.5V$ ,  $T_J=25^{\circ}C$ ,  $C_{IN}=1\mu F$ ,  $C_{OUT}=1\mu F$ , **Bold** typeface applies over  $-40^{\circ}C \leq T_J \leq 85^{\circ}C$ , unless otherwise specified.)

| Parameter                              | Symbol                              | Conditions                                     | Min  | Typ       | Max  | Unit              |
|----------------------------------------|-------------------------------------|------------------------------------------------|------|-----------|------|-------------------|
| Output Voltage                         | $V_{OUT}$                           | $V_{IN}=2.5V$<br>$1mA \leq I_{OUT} \leq 30mA$  | 1.47 | 1.5       | 1.53 | V                 |
| Input Voltage                          | $V_{IN}$                            |                                                |      |           | 6    | V                 |
| Output Current                         | $I_{OUT}$                           | $V_{IN}-V_{OUT}=1V$                            | 200  |           |      | mA                |
| Load Regulation                        | $V_{RLOAD}$                         | $V_{IN}=2.5V$<br>$1mA \leq I_{OUT} \leq 80mA$  |      | 12        | 40   | mV                |
| Line Regulation                        | $V_{RLINE}$                         | $2.3V \leq V_{IN} \leq 6V$<br>$I_{OUT}=30mA$   |      | 4         | 16   | mV                |
| Dropout Voltage                        | $V_{DROP}$                          | $I_{OUT}=10mA$                                 |      | 400       | 600  | mV                |
|                                        |                                     | $I_{OUT}=100mA$                                |      | 400       | 600  |                   |
|                                        |                                     | $I_{OUT}=150mA$                                |      | 400       | 600  |                   |
|                                        |                                     | $I_{OUT}=200mA$                                |      | 400       | 600  |                   |
| Quiescent Current                      | $I_Q$                               | $V_{IN}=2.5V$ , $I_{OUT}=0mA$                  |      | 25        | 50   | $\mu A$           |
| Standby Current                        | $I_{STD}$                           | $V_{IN}=2.5V$<br>$V_{CE}$ in OFF mode          |      | 0.1       | 1    | $\mu A$           |
| Power Supply Rejection Ratio           | PSRR                                | Ripple 0.5Vp-p, $f=1kHz$<br>$V_{IN}=2.5V$      |      | 70        |      | dB                |
| Output Voltage Temperature Coefficient | $\Delta V_{OUT}/\Delta T$           | $I_{OUT}=30mA$                                 |      | $\pm 150$ |      | $\mu V/^{\circ}C$ |
|                                        | $(\Delta V_{OUT}/V_{OUT})/\Delta T$ |                                                |      | $\pm 100$ |      | ppm/ $^{\circ}C$  |
| Short Current Limit                    | $I_{LIMIT}$                         | $V_{OUT}=0V$                                   |      | 50        |      | mA                |
| RMS Output Noise                       | $V_{NOISE}$                         | $T_A=25^{\circ}C$<br>$10Hz \leq f \leq 100kHz$ |      | 30        |      | $\mu V_{rms}$     |
| CE "High" Voltage                      |                                     | CE input voltage "High"                        | 1.5  |           |      | V                 |
| CE "Low" Voltage                       |                                     | CE input voltage "Low"                         |      |           | 0.25 | V                 |
| CE Pull-down Resistance                | $R_{PD}$                            |                                                | 2.5  | 5         | 10   | $M\Omega$         |
| Thermal Resistance (Junction to Case)  | $\theta_{JC}$                       | SOT-23-3                                       |      | 74        |      | $^{\circ}C/W$     |
|                                        |                                     | SOT-23-5                                       |      | 74        |      |                   |
|                                        |                                     | CSP-4                                          |      | 5         |      |                   |



# HIGH SPEED, EXTREMELY LOW NOISE LDO REGULATOR

AP2121

## Electrical Characteristics (Continued)

### AP2121-1.8 Electrical Characteristics

( $V_{IN}=2.8V$ ,  $T_J=25^{\circ}C$ ,  $C_{IN}=1\mu F$ ,  $C_{OUT}=1\mu F$ , **Bold** typeface applies over  $-40^{\circ}C \leq T_J \leq 85^{\circ}C$ , unless otherwise specified.)

| Parameter                              | Symbol                              | Conditions                                     | Min   | Typ       | Max   | Unit              |
|----------------------------------------|-------------------------------------|------------------------------------------------|-------|-----------|-------|-------------------|
| Output Voltage                         | $V_{OUT}$                           | $V_{IN}=2.8V$<br>$1mA \leq I_{OUT} \leq 30mA$  | 1.764 | 1.8       | 1.836 | V                 |
| Input Voltage                          | $V_{IN}$                            |                                                |       |           | 6     | V                 |
| Output Current                         | $I_{OUT}$                           | $V_{IN}-V_{OUT}=1V$                            | 200   |           |       | mA                |
| Load Regulation                        | $V_{RLOAD}$                         | $V_{IN}=2.8V$<br>$1mA \leq I_{OUT} \leq 80mA$  |       | 12        | 40    | mV                |
| Line Regulation                        | $V_{RLINE}$                         | $2.3V \leq V_{IN} \leq 6V$<br>$I_{OUT}=30mA$   |       | 4         | 16    | mV                |
| Dropout Voltage                        | $V_{DROP}$                          | $I_{OUT}=10mA$                                 |       | 20        | 40    | mV                |
|                                        |                                     | $I_{OUT}=100mA$                                |       | 150       | 300   |                   |
|                                        |                                     | $I_{OUT}=150mA$                                |       | 200       | 400   |                   |
|                                        |                                     | $I_{OUT}=200mA$                                |       | 250       | 500   |                   |
| Quiescent Current                      | $I_Q$                               | $V_{IN}=2.8V$ , $I_{OUT}=0mA$                  |       | 25        | 50    | $\mu A$           |
| Standby Current                        | $I_{STD}$                           | $V_{IN}=2.8V$<br>$V_{CE}$ in OFF mode          |       | 0.1       | 1     | $\mu A$           |
| Power Supply Rejection Ratio           | PSRR                                | Ripple 0.5Vp-p, $f=1kHz$<br>$V_{IN}=2.8V$      |       | 70        |       | dB                |
| Output Voltage Temperature Coefficient | $\Delta V_{OUT}/\Delta T$           | $I_{OUT}=30mA$                                 |       | $\pm 180$ |       | $\mu V/^{\circ}C$ |
|                                        | $(\Delta V_{OUT}/V_{OUT})/\Delta T$ |                                                |       | $\pm 100$ |       | ppm/ $^{\circ}C$  |
| Short Current Limit                    | $I_{LIMIT}$                         | $V_{OUT}=0V$                                   |       | 50        |       | mA                |
| RMS Output Noise                       | $V_{NOISE}$                         | $T_A=25^{\circ}C$<br>$10Hz \leq f \leq 100kHz$ |       | 30        |       | $\mu V_{rms}$     |
| CE "High" Voltage                      |                                     | CE input voltage "High"                        | 1.5   |           |       | V                 |
| CE "Low" Voltage                       |                                     | CE input voltage "Low"                         |       |           | 0.25  | V                 |
| CE Pull-down Resistance                | $R_{PD}$                            |                                                | 2.5   | 5         | 10    | $M\Omega$         |
| Thermal Resistance (Junction to Case)  | $\theta_{JC}$                       | SOT-23-3                                       |       | 74        |       | $^{\circ}C/W$     |
|                                        |                                     | SOT-23-5                                       |       | 74        |       |                   |
|                                        |                                     | CSP-4                                          |       | 5         |       |                   |



# HIGH SPEED, EXTREMELY LOW NOISE LDO REGULATOR

AP2121

## Electrical Characteristics (Continued)

### AP2121-2.5 Electrical Characteristics

( $V_{IN}=3.5V$ ,  $T_J=25^{\circ}C$ ,  $C_{IN}=1\mu F$ ,  $C_{OUT}=1\mu F$ , **Bold** typeface applies over  $-40^{\circ}C \leq T_J \leq 85^{\circ}C$ , unless otherwise specified.)

| Parameter                              | Symbol                              | Conditions                                     | Min  | Typ       | Max  | Unit              |
|----------------------------------------|-------------------------------------|------------------------------------------------|------|-----------|------|-------------------|
| Output Voltage                         | $V_{OUT}$                           | $V_{IN}=3.5V$<br>$1mA \leq I_{OUT} \leq 30mA$  | 2.45 | 2.5       | 2.55 | V                 |
| Input Voltage                          | $V_{IN}$                            |                                                |      |           | 6    | V                 |
| Output Current                         | $I_{OUT}$                           | $V_{IN}-V_{OUT}=1V$                            | 200  |           |      | mA                |
| Load Regulation                        | $V_{RLOAD}$                         | $V_{IN}=3.5V$<br>$1mA \leq I_{OUT} \leq 80mA$  |      | 12        | 40   | mV                |
| Line Regulation                        | $V_{RLINE}$                         | $3V \leq V_{IN} \leq 6V$<br>$I_{OUT}=30mA$     |      | 4         | 16   | mV                |
| Dropout Voltage                        | $V_{DROP}$                          | $I_{OUT}=10mA$                                 |      | 20        | 40   | mV                |
|                                        |                                     | $I_{OUT}=100mA$                                |      | 150       | 300  |                   |
|                                        |                                     | $I_{OUT}=150mA$                                |      | 200       | 400  |                   |
|                                        |                                     | $I_{OUT}=200mA$                                |      | 250       | 500  |                   |
| Quiescent Current                      | $I_Q$                               | $V_{IN}=3.5V$ , $I_{OUT}=0mA$                  |      | 25        | 50   | $\mu A$           |
| Standby Current                        | $I_{STD}$                           | $V_{IN}=3.5V$<br>$V_{CE}$ in OFF mode          |      | 0.1       | 1    | $\mu A$           |
| Power Supply Rejection Ratio           | PSRR                                | Ripple 0.5Vp-p, $f=1kHz$<br>$V_{IN}=3.5V$      |      | 70        |      | dB                |
| Output Voltage Temperature Coefficient | $\Delta V_{OUT}/\Delta T$           | $I_{OUT}=30mA$                                 |      | $\pm 250$ |      | $\mu V/^{\circ}C$ |
|                                        | $(\Delta V_{OUT}/V_{OUT})/\Delta T$ |                                                |      | $\pm 100$ |      | ppm/ $^{\circ}C$  |
| Short Current Limit                    | $I_{LIMIT}$                         | $V_{OUT}=0V$                                   |      | 50        |      | mA                |
| RMS Output Noise                       | $V_{NOISE}$                         | $T_A=25^{\circ}C$<br>$10Hz \leq f \leq 100kHz$ |      | 30        |      | $\mu V_{rms}$     |
| CE "High" Voltage                      |                                     | CE input voltage "High"                        | 1.5  |           |      | V                 |
| CE "Low" Voltage                       |                                     | CE input voltage "Low"                         |      |           | 0.25 | V                 |
| CE Pull-down Resistance                | $R_{PD}$                            |                                                | 2.5  | 5         | 10   | $M\Omega$         |
| Thermal Resistance (Junction to Case)  | $\theta_{JC}$                       | SOT-23-3                                       |      | 74        |      | $^{\circ}C/W$     |
|                                        |                                     | SOT-23-5                                       |      | 74        |      |                   |
|                                        |                                     | CSP-4                                          |      | 5         |      |                   |



# HIGH SPEED, EXTREMELY LOW NOISE LDO REGULATOR

AP2121

## Electrical Characteristics (Continued)

### AP2121-2.8 Electrical Characteristics

( $V_{IN}=3.8V$ ,  $T_J=25^{\circ}C$ ,  $C_{IN}=1\mu F$ ,  $C_{OUT}=1\mu F$ , **Bold** typeface applies over  $-40^{\circ}C \leq T_J \leq 85^{\circ}C$ , unless otherwise specified.)

| Parameter                              | Symbol                              | Conditions                                     | Min   | Typ       | Max   | Unit              |
|----------------------------------------|-------------------------------------|------------------------------------------------|-------|-----------|-------|-------------------|
| Output Voltage                         | $V_{OUT}$                           | $V_{IN}=3.8V$<br>$1mA \leq I_{OUT} \leq 30mA$  | 2.744 | 2.8       | 2.856 | V                 |
| Input Voltage                          | $V_{IN}$                            |                                                |       |           | 6     | V                 |
| Output Current                         | $I_{OUT}$                           | $V_{IN}-V_{OUT}=1V$                            | 200   |           |       | mA                |
| Load Regulation                        | $V_{RLOAD}$                         | $V_{IN}=3.8V$<br>$1mA \leq I_{OUT} \leq 80mA$  |       | 12        | 40    | mV                |
| Line Regulation                        | $V_{RLINE}$                         | $3.3V \leq V_{IN} \leq 6V$<br>$I_{OUT}=30mA$   |       | 4         | 16    | mV                |
| Dropout Voltage                        | $V_{DROP}$                          | $I_{OUT}=10mA$                                 |       | 20        | 40    | mV                |
|                                        |                                     | $I_{OUT}=100mA$                                |       | 150       | 300   |                   |
|                                        |                                     | $I_{OUT}=150mA$                                |       | 200       | 400   |                   |
|                                        |                                     | $I_{OUT}=200mA$                                |       | 250       | 500   |                   |
| Quiescent Current                      | $I_Q$                               | $V_{IN}=3.8V$ , $I_{OUT}=0mA$                  |       | 25        | 50    | $\mu A$           |
| Standby Current                        | $I_{STD}$                           | $V_{IN}=3.8V$<br>$V_{CE}$ in OFF mode          |       | 0.1       | 1     | $\mu A$           |
| Power Supply Rejection Ratio           | PSRR                                | Ripple 0.5Vp-p, $f=1kHz$<br>$V_{IN}=3.8V$      |       | 70        |       | dB                |
| Output Voltage Temperature Coefficient | $\Delta V_{OUT}/\Delta T$           | $I_{OUT}=30mA$                                 |       | $\pm 280$ |       | $\mu V/^{\circ}C$ |
|                                        | $(\Delta V_{OUT}/V_{OUT})/\Delta T$ |                                                |       | $\pm 100$ |       | ppm/ $^{\circ}C$  |
| Short Current Limit                    | $I_{LIMIT}$                         | $V_{OUT}=0V$                                   |       | 50        |       | mA                |
| RMS Output Noise                       | $V_{NOISE}$                         | $T_A=25^{\circ}C$<br>$10Hz \leq f \leq 100kHz$ |       | 30        |       | $\mu V_{rms}$     |
| CE "High" Voltage                      |                                     | CE input voltage "High"                        | 1.5   |           |       | V                 |
| CE "Low" Voltage                       |                                     | CE input voltage "Low"                         |       |           | 0.25  | V                 |
| CE Pull-down Resistance                | $R_{PD}$                            |                                                | 2.5   | 5         | 10    | $M\Omega$         |
| Thermal Resistance (Junction to Case)  | $\theta_{JC}$                       | SOT-23-3                                       |       | 74        |       | $^{\circ}C/W$     |
|                                        |                                     | SOT-23-5                                       |       | 74        |       |                   |
|                                        |                                     | CSP-4                                          |       | 5         |       |                   |



# HIGH SPEED, EXTREMELY LOW NOISE LDO REGULATOR

AP2121

## Electrical Characteristics (Continued)

### AP2121-2.85 Electrical Characteristics

( $V_{IN}=3.85V$ ,  $T_J=25^{\circ}C$ ,  $C_{IN}=1\mu F$ ,  $C_{OUT}=1\mu F$ , **Bold** typeface applies over  $-40^{\circ}C \leq T_J \leq 85^{\circ}C$ , unless otherwise specified.)

| Parameter                              | Symbol                              | Conditions                                     | Min   | Typ                         | Max   | Unit              |
|----------------------------------------|-------------------------------------|------------------------------------------------|-------|-----------------------------|-------|-------------------|
| Output Voltage                         | $V_{OUT}$                           | $V_{IN}=3.85V$<br>$1mA \leq I_{OUT} \leq 30mA$ | 2.793 | 2.85                        | 2.907 | V                 |
| Input Voltage                          | $V_{IN}$                            |                                                |       |                             | 6     | V                 |
| Output Current                         | $I_{OUT}$                           | $V_{IN}-V_{OUT}=1V$                            | 200   |                             |       | mA                |
| Load Regulation                        | $V_{RLOAD}$                         | $V_{IN}=3.85V$<br>$1mA \leq I_{OUT} \leq 80mA$ |       | 12                          | 40    | mV                |
| Line Regulation                        | $V_{RLINE}$                         | $3.3V \leq V_{IN} \leq 6V$<br>$I_{OUT}=30mA$   |       | 4                           | 16    | mV                |
| Dropout Voltage                        | $V_{DROP}$                          | $I_{OUT}=10mA$                                 |       | 20                          | 40    | mV                |
|                                        |                                     | $I_{OUT}=100mA$                                |       | 150                         | 300   |                   |
|                                        |                                     | $I_{OUT}=150mA$                                |       | 200                         | 400   |                   |
|                                        |                                     | $I_{OUT}=200mA$                                |       | 250                         | 500   |                   |
| Quiescent Current                      | $I_Q$                               | $V_{IN}=3.85V$ , $I_{OUT}=0mA$                 |       | 25                          | 50    | $\mu A$           |
| Standby Current                        | $I_{STD}$                           | $V_{IN}=3.85V$<br>$V_{CE}$ in OFF mode         |       | 0.1                         | 1     | $\mu A$           |
| Power Supply Rejection Ratio           | PSRR                                | Ripple 0.5Vp-p, $f=1kHz$<br>$V_{IN}=3.85V$     |       | 70                          |       | dB                |
| Output Voltage Temperature Coefficient | $\Delta V_{OUT}/\Delta T$           | $I_{OUT}=30mA$                                 |       | <b><math>\pm 280</math></b> |       | $\mu V/^{\circ}C$ |
|                                        | $(\Delta V_{OUT}/V_{OUT})/\Delta T$ |                                                |       | <b><math>\pm 100</math></b> |       | ppm/ $^{\circ}C$  |
| Short Current Limit                    | $I_{LIMIT}$                         | $V_{OUT}=0V$                                   |       | 50                          |       | mA                |
| RMS Output Noise                       | $V_{NOISE}$                         | $T_A=25^{\circ}C$<br>$10Hz \leq f \leq 100kHz$ |       | 30                          |       | $\mu V_{rms}$     |
| CE "High" Voltage                      |                                     | CE input voltage "High"                        | 1.5   |                             |       | V                 |
| CE "Low" Voltage                       |                                     | CE input voltage "Low"                         |       |                             | 0.25  | V                 |
| CE Pull-down Resistance                | $R_{PD}$                            |                                                | 2.5   | 5                           | 10    | $M\Omega$         |
| Thermal Resistance (Junction to Case)  | $\theta_{JC}$                       | CSP-4                                          |       | 5                           |       | $^{\circ}C/W$     |



# HIGH SPEED, EXTREMELY LOW NOISE LDO REGULATOR

AP2121

## Electrical Characteristics (Continued)

### AP2121-3.0 Electrical Characteristics

( $V_{IN}=4V$ ,  $T_J=25^{\circ}C$ ,  $C_{IN}=1\mu F$ ,  $C_{OUT}=1\mu F$ , **Bold** typeface applies over  $-40^{\circ}C \leq T_J \leq 85^{\circ}C$ , unless otherwise specified.)

| Parameter                              | Symbol                              | Conditions                                     | Min  | Typ       | Max  | Unit              |
|----------------------------------------|-------------------------------------|------------------------------------------------|------|-----------|------|-------------------|
| Output Voltage                         | $V_{OUT}$                           | $V_{IN}=4V$<br>$1mA \leq I_{OUT} \leq 30mA$    | 2.94 | 3.0       | 3.06 | V                 |
| Input Voltage                          | $V_{IN}$                            |                                                |      |           | 6    | V                 |
| Output Current                         | $I_{OUT}$                           | $V_{IN}-V_{OUT}=1V$                            | 200  |           |      | mA                |
| Load Regulation                        | $V_{RLOAD}$                         | $V_{IN}=4V$<br>$1mA \leq I_{OUT} \leq 80mA$    |      | 12        | 40   | mV                |
| Line Regulation                        | $V_{RLINE}$                         | $3.5V \leq V_{IN} \leq 6V$<br>$I_{OUT}=30mA$   |      | 4         | 16   | mV                |
| Dropout Voltage                        | $V_{DROP}$                          | $I_{OUT}=10mA$                                 |      | 20        | 40   | mV                |
|                                        |                                     | $I_{OUT}=100mA$                                |      | 150       | 300  |                   |
|                                        |                                     | $I_{OUT}=150mA$                                |      | 200       | 400  |                   |
|                                        |                                     | $I_{OUT}=200mA$                                |      | 250       | 500  |                   |
| Quiescent Current                      | $I_Q$                               | $V_{IN}=4V$ , $I_{OUT}=0mA$                    |      | 25        | 50   | $\mu A$           |
| Standby Current                        | $I_{STD}$                           | $V_{IN}=4V$<br>$V_{CE}$ in OFF mode            |      | 0.1       | 1    | $\mu A$           |
| Power Supply Rejection Ratio           | PSRR                                | Ripple 0.5Vp-p, $f=1kHz$<br>$V_{IN}=4V$        |      | 70        |      | dB                |
| Output Voltage Temperature Coefficient | $\Delta V_{OUT}/\Delta T$           | $I_{OUT}=30mA$                                 |      | $\pm 300$ |      | $\mu V/^{\circ}C$ |
|                                        | $(\Delta V_{OUT}/V_{OUT})/\Delta T$ |                                                |      | $\pm 100$ |      | ppm/ $^{\circ}C$  |
| Short Current Limit                    | $I_{LIMIT}$                         | $V_{OUT}=0V$                                   |      | 50        |      | mA                |
| RMS Output Noise                       | $V_{NOISE}$                         | $T_A=25^{\circ}C$<br>$10Hz \leq f \leq 100kHz$ |      | 30        |      | $\mu V_{rms}$     |
| CE "High" Voltage                      |                                     | CE input voltage "High"                        | 1.5  |           |      | V                 |
| CE "Low" Voltage                       |                                     | CE input voltage "Low"                         |      |           | 0.25 | V                 |
| CE Pull-down Resistance                | $R_{PD}$                            |                                                | 2.5  | 5         | 10   | $M\Omega$         |
| Thermal Resistance (Junction to Case)  | $\theta_{JC}$                       | SOT-23-3                                       |      | 74        |      | $^{\circ}C/W$     |
|                                        |                                     | SOT-23-5                                       |      | 74        |      |                   |
|                                        |                                     | CSP-4                                          |      | 5         |      |                   |



# HIGH SPEED, EXTREMELY LOW NOISE LDO REGULATOR

AP2121

## Electrical Characteristics (Continued)

### AP2121-3.2 Electrical Characteristics

( $V_{IN}=4.2V$ ,  $T_J=25^{\circ}C$ ,  $C_{IN}=1\mu F$ ,  $C_{OUT}=1\mu F$ , **Bold** typeface applies over  $-40^{\circ}C \leq T_J \leq 85^{\circ}C$ , unless otherwise specified.)

| Parameter                              | Symbol                              | Conditions                                     | Min   | Typ       | Max   | Unit              |
|----------------------------------------|-------------------------------------|------------------------------------------------|-------|-----------|-------|-------------------|
| Output Voltage                         | $V_{OUT}$                           | $V_{IN}=4.2V$<br>$1mA \leq I_{OUT} \leq 30mA$  | 3.136 | 3.2       | 3.264 | V                 |
| Input Voltage                          | $V_{IN}$                            |                                                |       |           | 6     | V                 |
| Output Current                         | $I_{OUT}$                           | $V_{IN}-V_{OUT}=1V$                            | 200   |           |       | mA                |
| Load Regulation                        | $V_{RLOAD}$                         | $V_{IN}=4.2V$<br>$1mA \leq I_{OUT} \leq 80mA$  |       | 12        | 40    | mV                |
| Line Regulation                        | $V_{RLINE}$                         | $3.7V \leq V_{IN} \leq 6V$<br>$I_{OUT}=30mA$   |       | 4         | 16    | mV                |
| Dropout Voltage                        | $V_{DROP}$                          | $I_{OUT}=10mA$                                 |       | 20        | 40    | mV                |
|                                        |                                     | $I_{OUT}=100mA$                                |       | 150       | 300   |                   |
|                                        |                                     | $I_{OUT}=150mA$                                |       | 200       | 400   |                   |
|                                        |                                     | $I_{OUT}=200mA$                                |       | 250       | 500   |                   |
| Quiescent Current                      | $I_Q$                               | $V_{IN}=4.2V$ , $I_{OUT}=0mA$                  |       | 25        | 50    | $\mu A$           |
| Standby Current                        | $I_{STD}$                           | $V_{IN}=4.2V$<br>$V_{CE}$ in OFF mode          |       | 0.1       | 1     | $\mu A$           |
| Power Supply Rejection Ratio           | PSRR                                | Ripple 0.5Vp-p, $f=1kHz$<br>$V_{IN}=4.2V$      |       | 70        |       | dB                |
| Output Voltage Temperature Coefficient | $\Delta V_{OUT}/\Delta T$           | $I_{OUT}=30mA$                                 |       | $\pm 320$ |       | $\mu V/^{\circ}C$ |
|                                        | $(\Delta V_{OUT}/V_{OUT})/\Delta T$ |                                                |       | $\pm 100$ |       | ppm/ $^{\circ}C$  |
| Short Current Limit                    | $I_{LIMIT}$                         | $V_{OUT}=0V$                                   |       | 50        |       | mA                |
| RMS Output Noise                       | $V_{NOISE}$                         | $T_A=25^{\circ}C$<br>$10Hz \leq f \leq 100kHz$ |       | 30        |       | $\mu V_{rms}$     |
| CE "High" Voltage                      |                                     | CE input voltage "High"                        | 1.5   |           |       | V                 |
| CE "Low" Voltage                       |                                     | CE input voltage "Low"                         |       |           | 0.25  | V                 |
| CE Pull-down Resistance                | $R_{PD}$                            |                                                | 2.5   | 5         | 10    | M $\Omega$        |
| Thermal Resistance (Junction to Case)  | $\theta_{JC}$                       | SOT-23-3                                       |       | 74        |       | $^{\circ}C/W$     |
|                                        |                                     | SOT-23-5                                       |       | 74        |       |                   |
|                                        |                                     | CSP-4                                          |       | 5         |       |                   |



# HIGH SPEED, EXTREMELY LOW NOISE LDO REGULATOR

AP2121

## Electrical Characteristics (Continued)

### AP2121-3.3 Electrical Characteristics

( $V_{IN}=4.3V$ ,  $T_J=25^{\circ}C$ ,  $C_{IN}=1\mu F$ ,  $C_{OUT}=1\mu F$ , **Bold** typeface applies over  $-40^{\circ}C \leq T_J \leq 85^{\circ}C$ , unless otherwise specified.)

| Parameter                              | Symbol                              | Conditions                                     | Min   | Typ       | Max   | Unit              |
|----------------------------------------|-------------------------------------|------------------------------------------------|-------|-----------|-------|-------------------|
| Output Voltage                         | $V_{OUT}$                           | $V_{IN}=4.3V$<br>$1mA \leq I_{OUT} \leq 30mA$  | 3.234 | 3.3       | 3.366 | V                 |
| Input Voltage                          | $V_{IN}$                            |                                                |       |           | 6     | V                 |
| Output Current                         | $I_{OUT}$                           | $V_{IN}-V_{OUT}=1V$                            | 200   |           |       | mA                |
| Load Regulation                        | $V_{RLOAD}$                         | $V_{IN}=4.3V$<br>$1mA \leq I_{OUT} \leq 80mA$  |       | 12        | 40    | mV                |
| Line Regulation                        | $V_{RLINE}$                         | $3.8V \leq V_{IN} \leq 6V$<br>$I_{OUT}=30mA$   |       | 4         | 16    | mV                |
| Dropout Voltage                        | $V_{DROP}$                          | $I_{OUT}=10mA$                                 |       | 20        | 40    | mV                |
|                                        |                                     | $I_{OUT}=100mA$                                |       | 150       | 300   |                   |
|                                        |                                     | $I_{OUT}=150mA$                                |       | 200       | 400   |                   |
|                                        |                                     | $I_{OUT}=200mA$                                |       | 250       | 500   |                   |
| Quiescent Current                      | $I_Q$                               | $V_{IN}=4.3V$ , $I_{OUT}=0mA$                  |       | 25        | 50    | $\mu A$           |
| Standby Current                        | $I_{STD}$                           | $V_{IN}=4.3V$<br>$V_{CE}$ in OFF mode          |       | 0.1       | 1     | $\mu A$           |
| Power Supply Rejection Ratio           | PSRR                                | Ripple 0.5Vp-p, $f=1kHz$<br>$V_{IN}=4.3V$      |       | 70        |       | dB                |
| Output Voltage Temperature Coefficient | $\Delta V_{OUT}/\Delta T$           | $I_{OUT}=30mA$                                 |       | $\pm 330$ |       | $\mu V/^{\circ}C$ |
|                                        | $(\Delta V_{OUT}/V_{OUT})/\Delta T$ |                                                |       | $\pm 100$ |       | ppm/ $^{\circ}C$  |
| Short Current Limit                    | $I_{LIMIT}$                         | $V_{OUT}=0V$                                   |       | 50        |       | mA                |
| RMS Output Noise                       | $V_{NOISE}$                         | $T_A=25^{\circ}C$<br>$10Hz \leq f \leq 100kHz$ |       | 30        |       | $\mu V_{rms}$     |
| CE "High" Voltage                      |                                     | CE input voltage "High"                        | 1.5   |           |       | V                 |
| CE "Low" Voltage                       |                                     | CE input voltage "Low"                         |       |           | 0.25  | V                 |
| CE Pull-down Resistance                | $R_{PD}$                            |                                                | 2.5   | 5         | 10    | M $\Omega$        |
| Thermal Resistance (Junction to Case)  | $\theta_{JC}$                       | SOT-23-3                                       |       | 74        |       | $^{\circ}C/W$     |
|                                        |                                     | SOT-23-5                                       |       | 74        |       |                   |
|                                        |                                     | CSP-4                                          |       | 5         |       |                   |

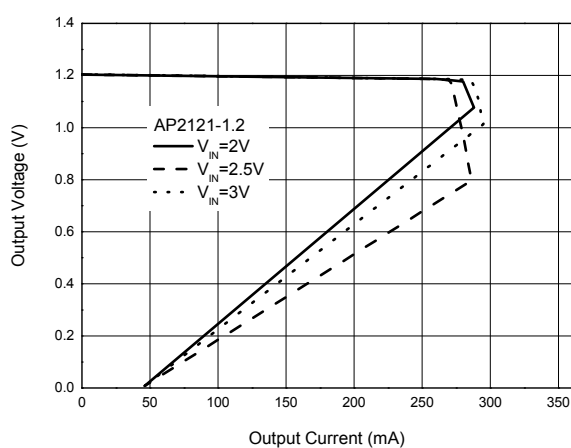
**HIGH SPEED, EXTREMELY LOW NOISE LDO REGULATOR****AP2121****Typical Performance Characteristics**

Figure 4. Output Voltage vs. Output Current

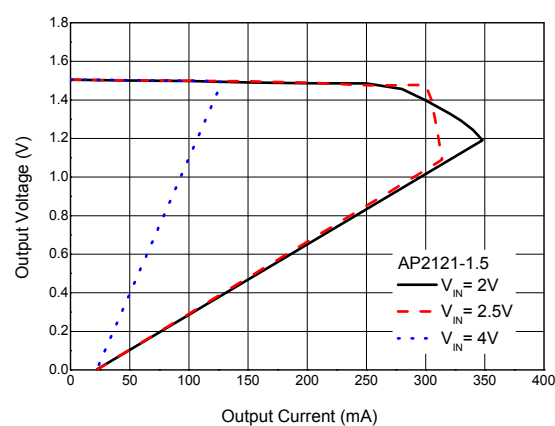


Figure 5. Output Voltage vs. Output Current

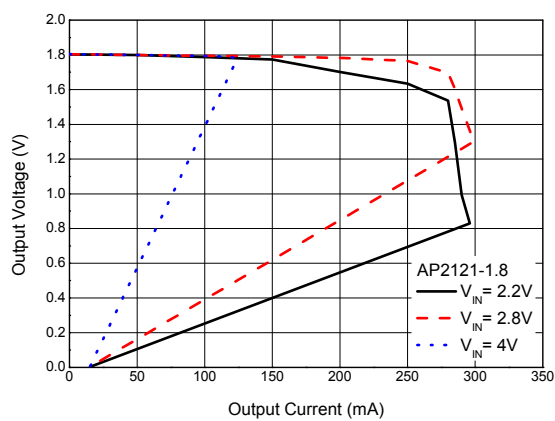


Figure 6. Output Voltage vs. Output Current

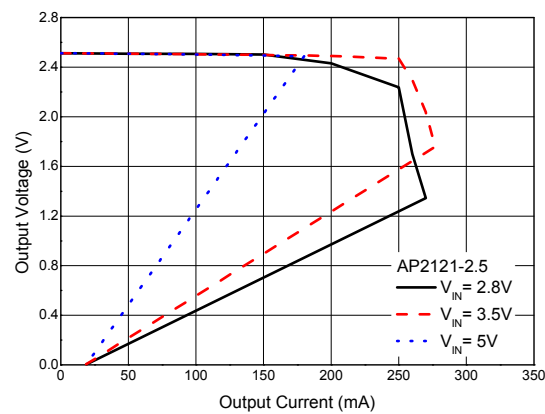


Figure 7. Output Voltage vs. Output Current

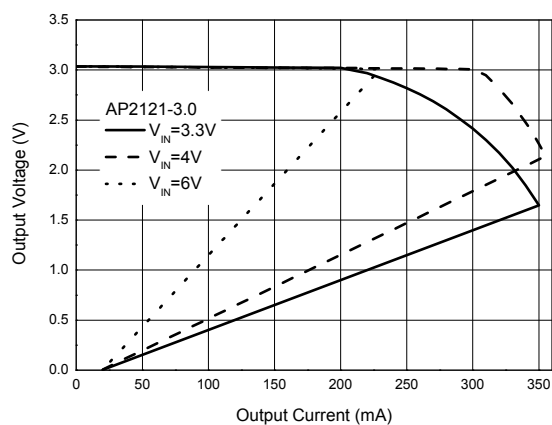
**HIGH SPEED, EXTREMELY LOW NOISE LDO REGULATOR****AP2121****Typical Performance Characteristics (Continued)**

Figure 8. Output Voltage vs. Output Current

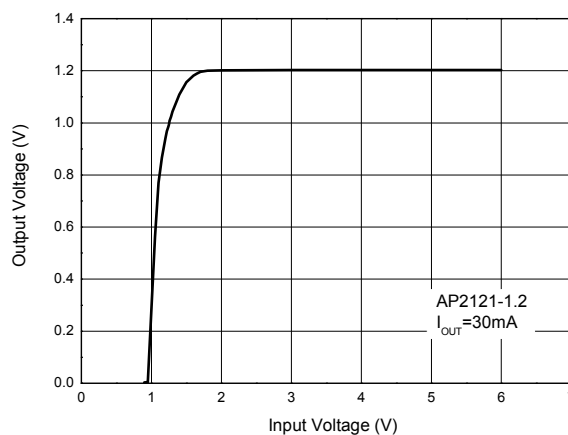


Figure 9. Output Voltage vs. Input Voltage

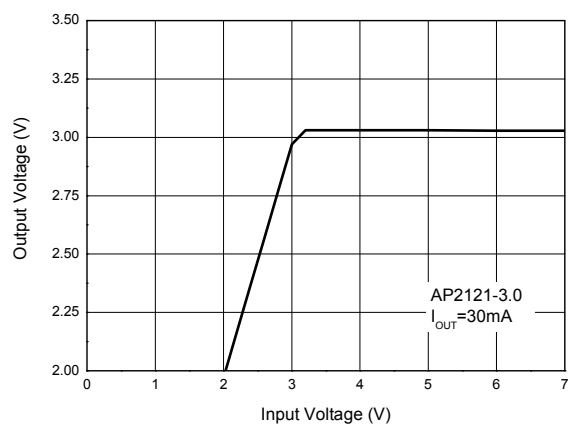


Figure 10. Output Voltage vs. Input Voltage

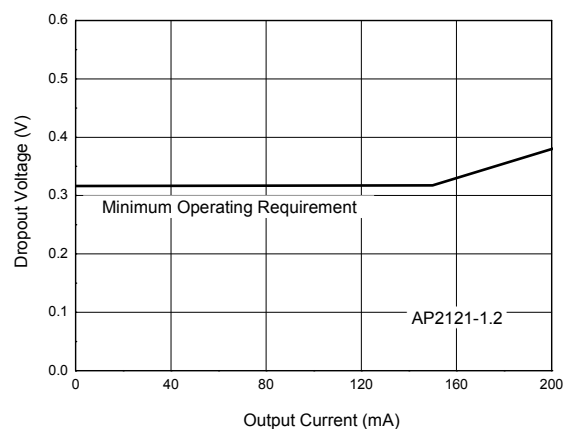


Figure 11. Dropout Voltage vs. Output Current

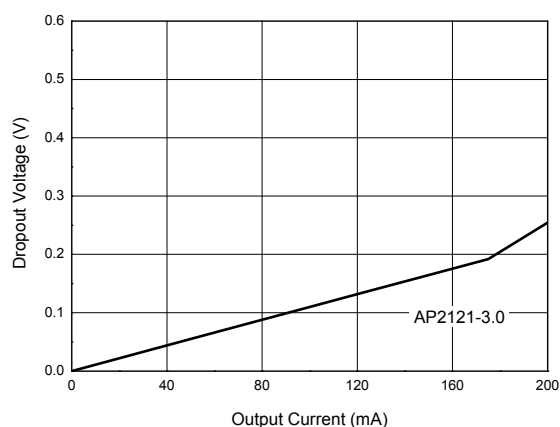
**HIGH SPEED, EXTREMELY LOW NOISE LDO REGULATOR****AP2121****Typical Performance Characteristics (Continued)**

Figure 12. Dropout Voltage vs. Output Current

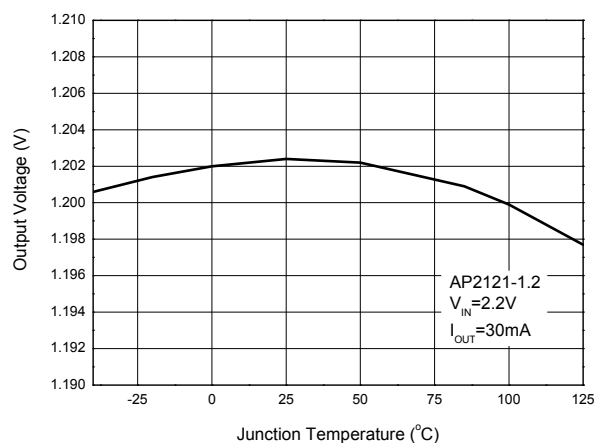


Figure 13. Output Voltage vs. Junction Temperature

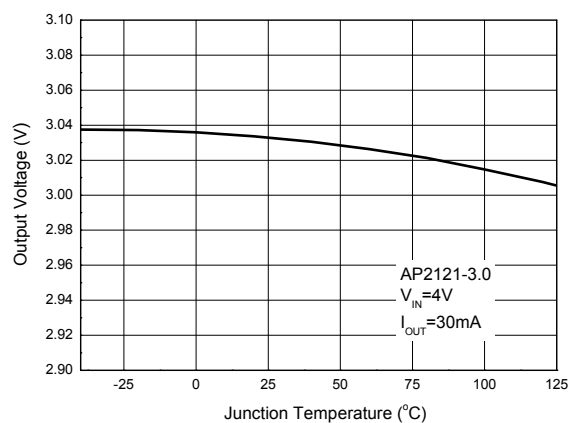


Figure 14. Output Voltage vs. Junction Temperature

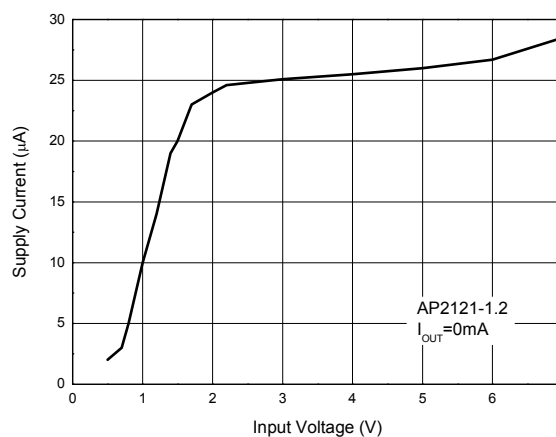


Figure 15. Supply Current vs. Input Voltage

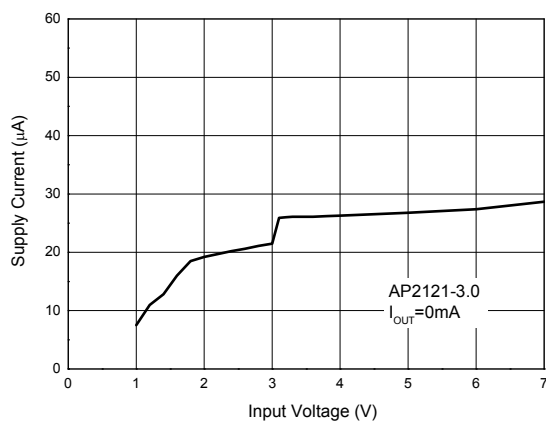
**HIGH SPEED, EXTREMELY LOW NOISE LDO REGULATOR****AP2121****Typical Performance Characteristics (Continued)**

Figure 16. Supply Current vs. Input Voltage

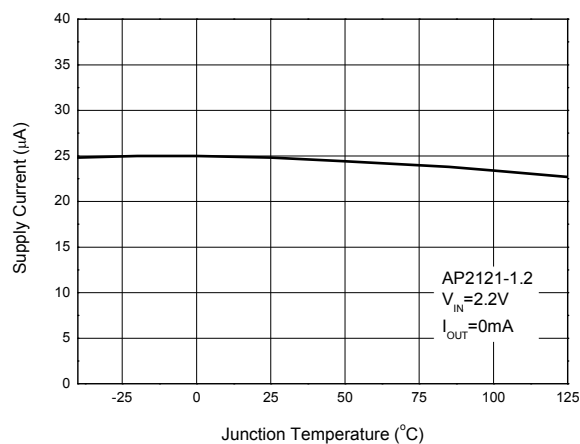


Figure 17. Supply Current vs. Junction Temperature

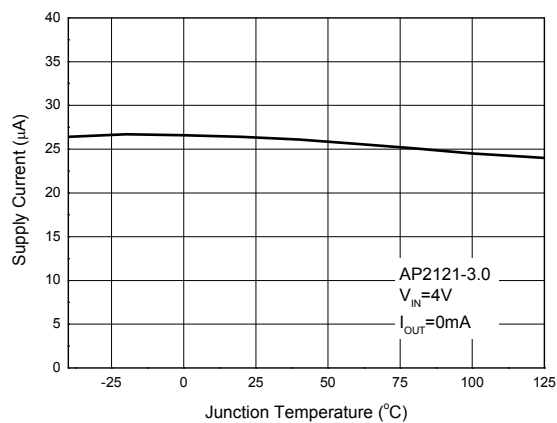
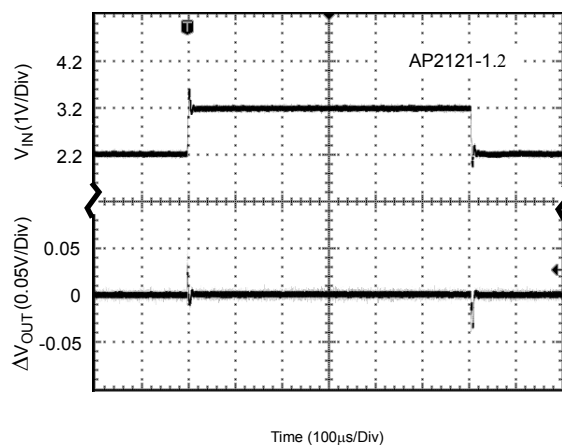


Figure 18. Supply Current vs. Junction Temperature

Figure 19. Line Transient  
(Conditions:  $I_{\text{OUT}}=30\text{mA}$ ,  $C_{\text{IN}}=1\mu\text{F}$ ,  $C_{\text{OUT}}=1\mu\text{F}$ )

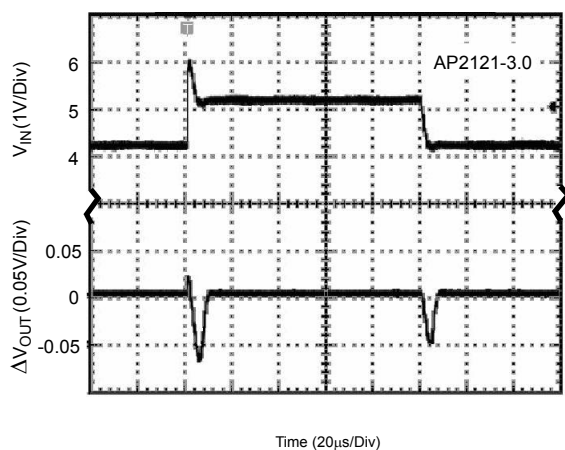
**HIGH SPEED, EXTREMELY LOW NOISE LDO REGULATOR****AP2121****Typical Performance Characteristics (Continued)**

Figure 20. Line Transient  
(Conditions:  $I_{OUT}=30\text{mA}$ ,  $C_{IN}=1\mu\text{F}$ ,  $C_{OUT}=1\mu\text{F}$ )

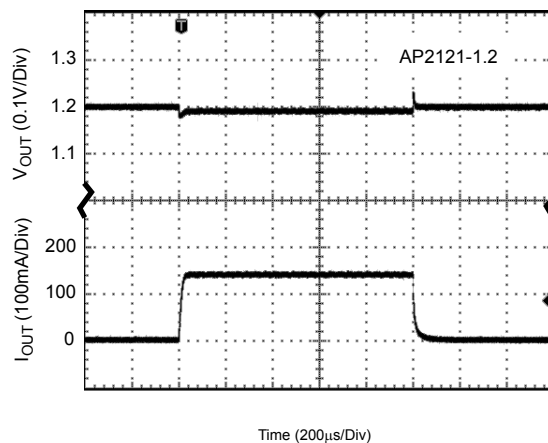


Figure 21. Load Transient  
(Conditions:  $V_{IN}=2.2\text{V}$ ,  $C_{IN}=1\mu\text{F}$ ,  $C_{OUT}=1\mu\text{F}$ )

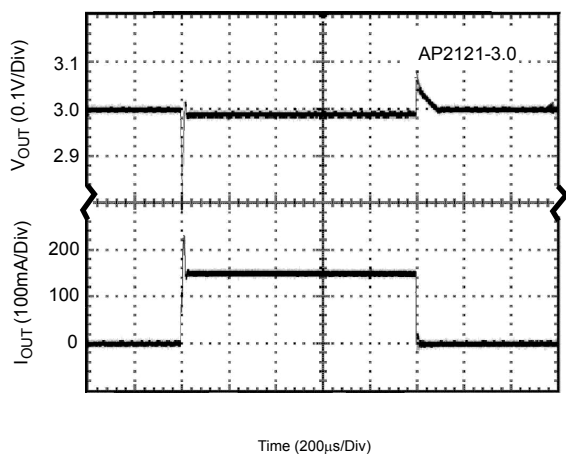


Figure 22. Load Transient  
(Conditions:  $V_{IN}=4\text{V}$ ,  $C_{IN}=1\mu\text{F}$ ,  $C_{OUT}=1\mu\text{F}$ )

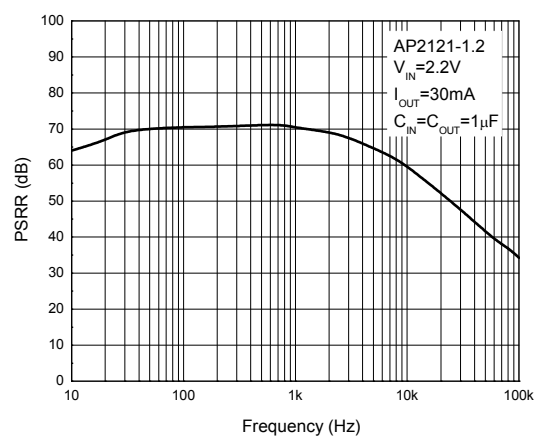


Figure 23. PSRR vs. Frequency

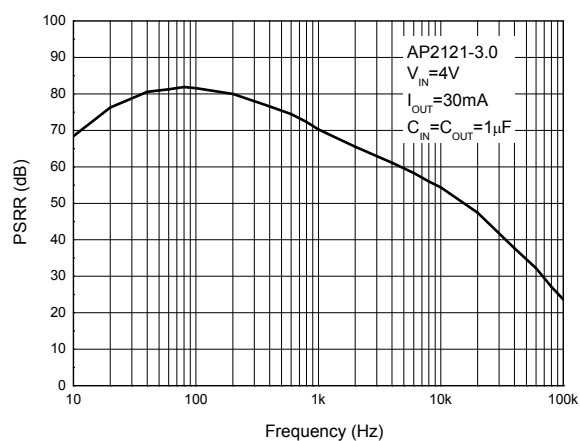
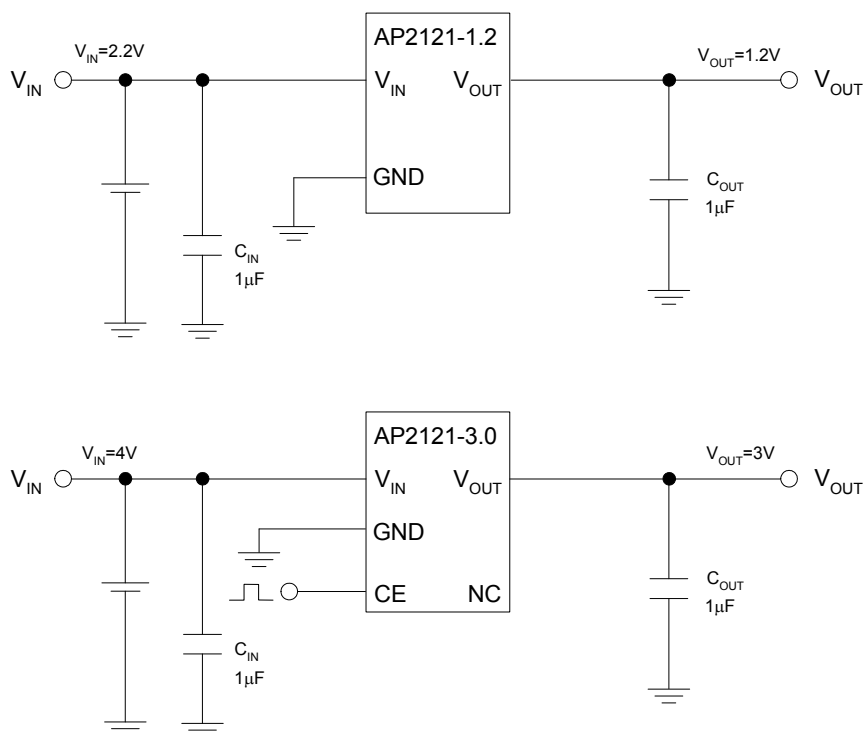
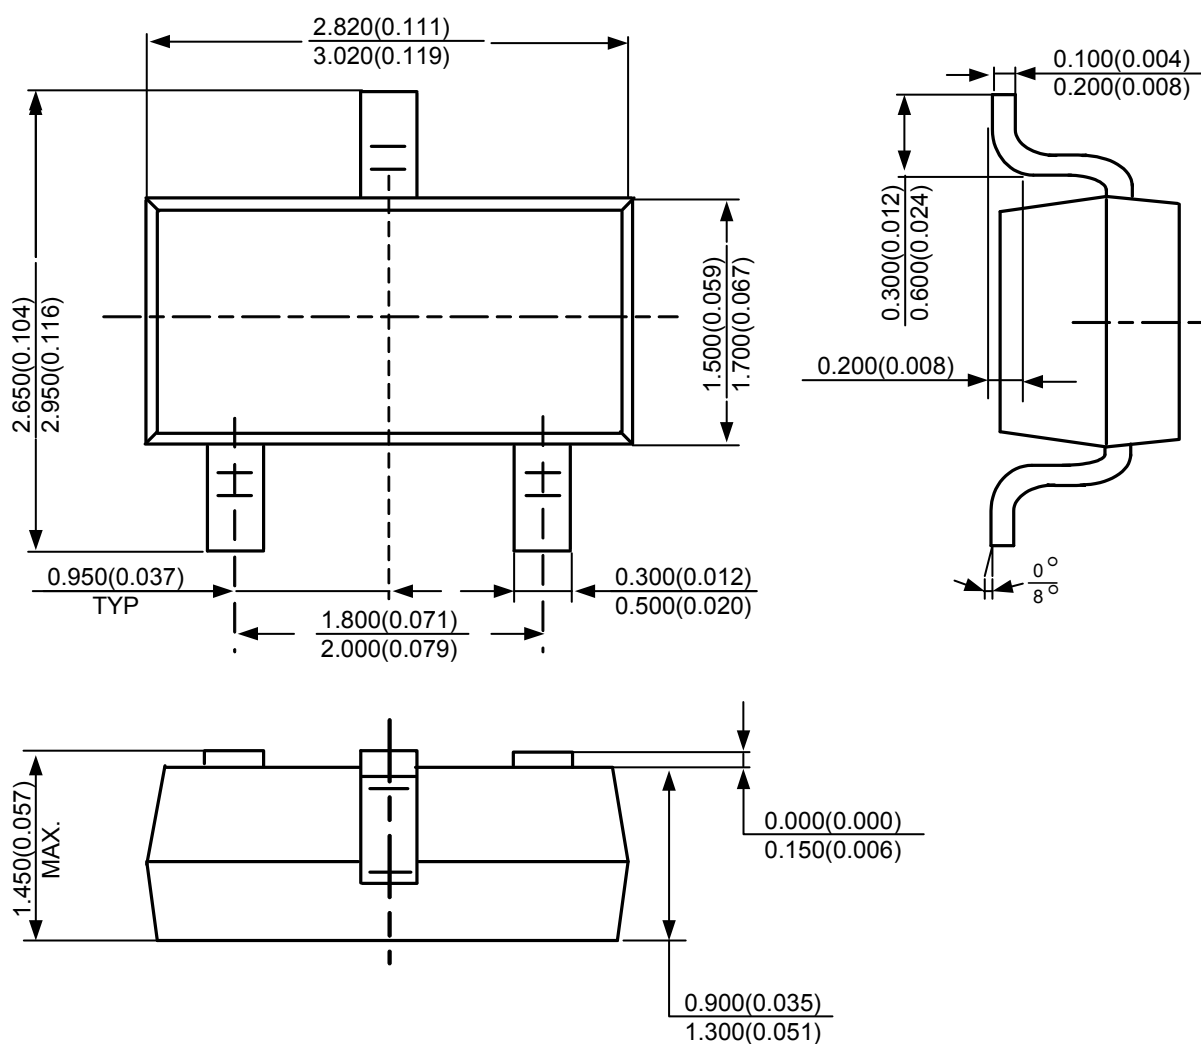
**HIGH SPEED, EXTREMELY LOW NOISE LDO REGULATOR****AP2121****Typical Performance Characteristics (Continued)**


Figure 24. PSRR vs. Frequency


**HIGH SPEED, EXTREMELY LOW NOISE LDO REGULATOR****AP2121****Typical Application**


Note: Filter capacitors are required at the AP2121's input and output. 1μF capacitor is required at the input. The minimum output capacitance required for stability should be more than 1μF with ESR from 0.01Ω to 100Ω. Ceramic capacitors are recommended.

Figure 25. Typical Application of AP2121

**HIGH SPEED, EXTREMELY LOW NOISE LDO REGULATOR****AP2121****Mechanical Dimensions****SOT-23-3****Unit: mm(inch)**

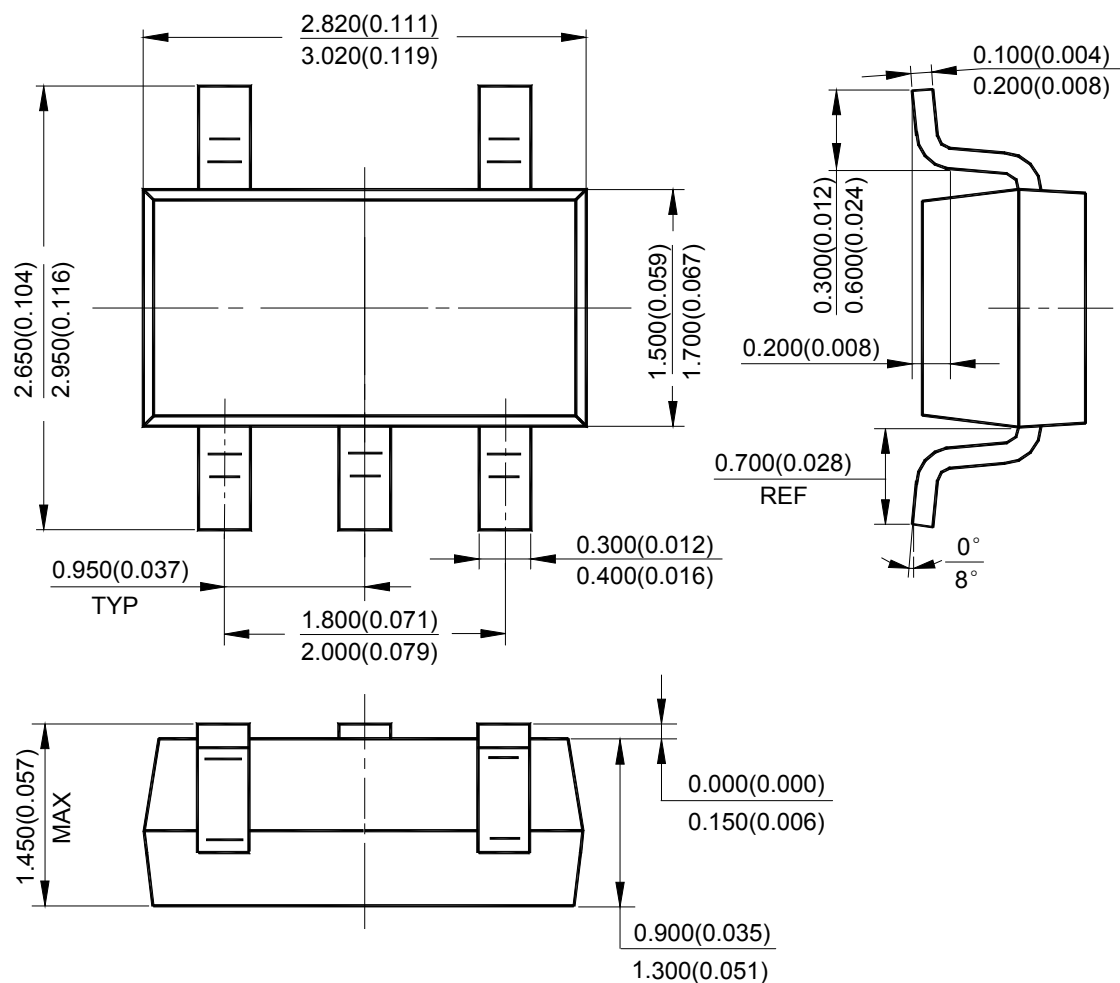**HIGH SPEED, EXTREMELY LOW NOISE LDO REGULATOR****AP2121****Mechanical Dimensions (Continued)****SOT-23-5****Unit: mm(inch)**

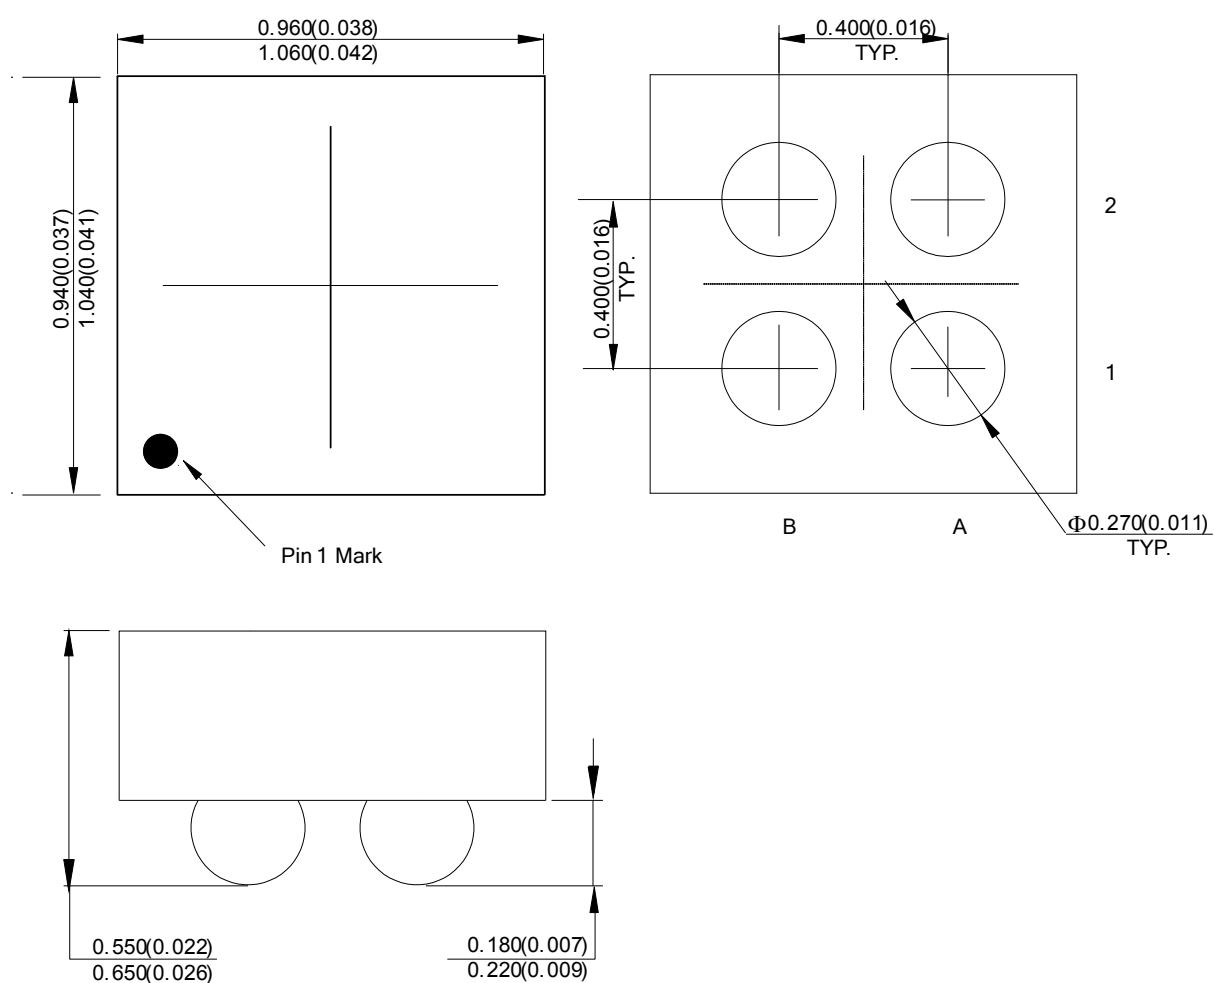**HIGH SPEED, EXTREMELY LOW NOISE LDO REGULATOR****AP2121****Mechanical Dimensions (Continued)****CSP-4 (P 0.4)****Unit: mm(inch)**

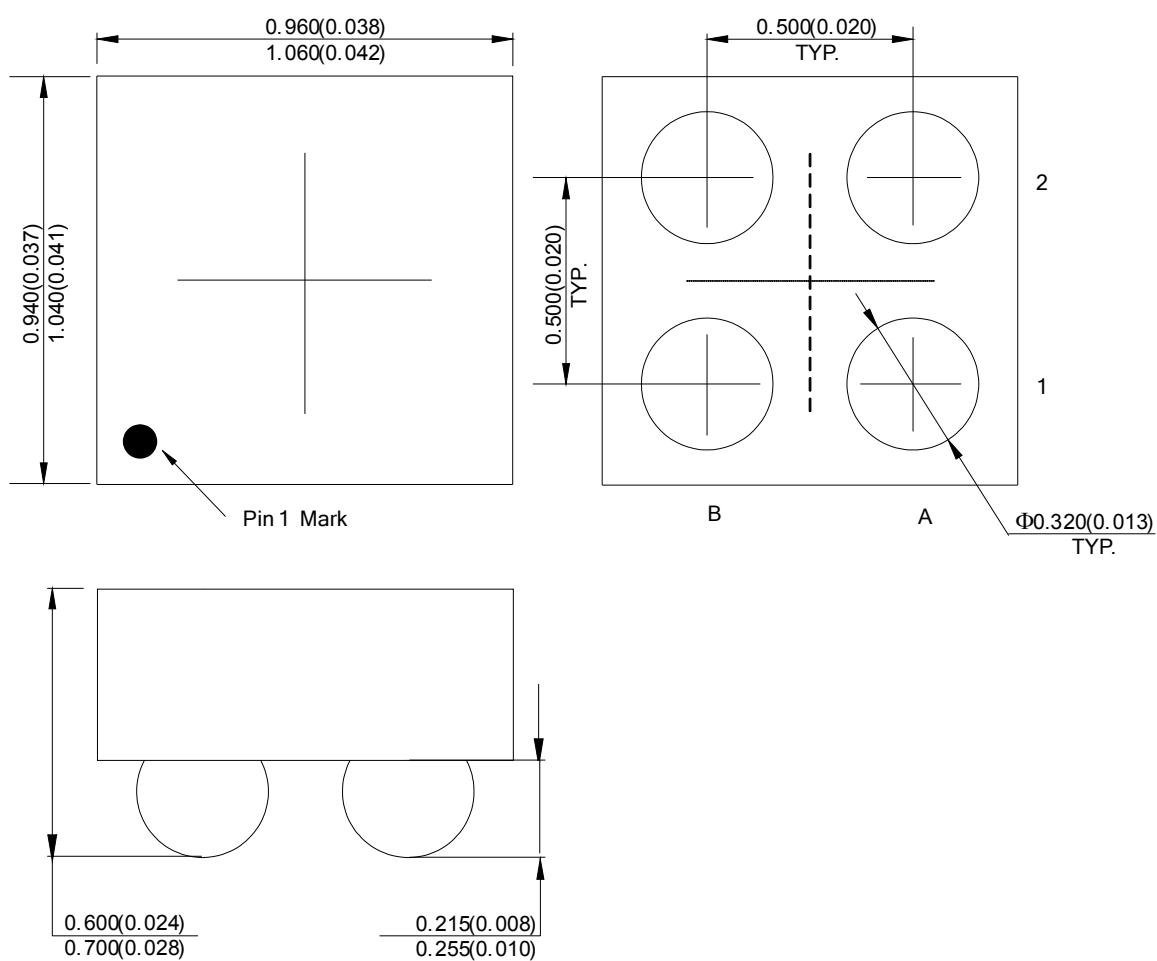**HIGH SPEED, EXTREMELY LOW NOISE LDO REGULATOR****AP2121****Mechanical Dimensions (Continued)****CSP-4 (P 0.5)****Unit: mm(inch)**



## **BCD Semiconductor Manufacturing Limited**

<http://www.bcdsemi.com>

### **IMPORTANT NOTICE**

BCD Semiconductor Manufacturing Limited reserves the right to make changes without further notice to any products or specifications herein. BCD Semiconductor Manufacturing Limited does not assume any responsibility for use of any its products for any particular purpose, nor does BCD Semiconductor Manufacturing Limited assume any liability arising out of the application or use of any its products or circuits. BCD Semiconductor Manufacturing Limited does not convey any license under its patent rights or other rights nor the rights of others.

---

#### **MAIN SITE**

##### **- Headquarters**

##### **BCD Semiconductor Manufacturing Limited**

No. 1600, Zi Xing Road, Shanghai ZiZhu Science-based Industrial Park, 200241, China  
Tel: +86-21-24162266, Fax: +86-21-24162277

##### **- Wafer Fab**

##### **Shanghai SIM-BCD Semiconductor Manufacturing Co., Ltd.**

800 Yi Shan Road, Shanghai 200233, China  
Tel: +86-21-6485 1491, Fax: +86-21-5450 0008

#### **REGIONAL SALES OFFICE**

##### **Shenzhen Office**

##### **Shanghai SIM-BCD Semiconductor Manufacturing Co., Ltd., Shenzhen Office**

Unit A Room 1203, Skyworth Bldg., Gaoxin Ave. I.S., Nanshan District, Shenzhen, China  
Tel: +86-755-8826 7951  
Fax: +86-755-8826 7865

##### **Taiwan Office**

##### **BCD Semiconductor (Taiwan) Company Limited**

4F, 298-1, Rui Guang Road, Nei-Hu District, Taipei, Taiwan  
Tel: +886-2-2656 2808  
Fax: +886-2-2656 2806

##### **USA Office**

##### **BCD Semiconductor Corp.**

30920 Huntwood Ave. Hayward, CA 94544, USA  
Tel : +1-510-324-2988  
Fax: +1-510-324-2788

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- ⊖ View [AP2121AK-1.5TRG1](#) on WIN SOURCE
- ⊖ [Diodes Incorporated](#) Information

## Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management