



THE DATASHEET OF JANTXV2N6678



NPN High Power Silicon Transistors

2N6676 & 2N6678

Features

- Available in JAN, JANTX, and JANTXV per MIL-PRF-19500/538
- TO-3 (TO-204AA) Package



Maximum Ratings

Ratings	Symbol	2N6676	2N6678	Units
Collector - Emitter Voltage	V_{CEO}	300	400	Vdc
Collector - Base Voltage	V_{CBO}	450	650	Vdc
Collector - Base Voltage	V_{CEX}	450	650	Vdc
Emitter - Base Voltage	V_{EBO}	8.0		Vdc
Base Current	I_B	5.0		Adc
Collector Current	I_C	15		Adc
Total Power Dissipation @ $T_A = +25^\circ\text{C}$ ⁽¹⁾ @ $T_A = +25^\circ\text{C}$	P_T	6.0 ⁽¹⁾ 175	6.0 ⁽¹⁾ 175	W W
Operating & Storage Temperature Range	T_{op}, T_{stg}	-65 to +200		$^\circ\text{C}$

Thermal Characteristics

Characteristics	Symbol	Maximum	Units
Thermal Resistance, Junction-to-Case	$R_{\theta JC}$	1.0	$^\circ\text{C/W}$

1) Derate linearly @ 34.2 mW/ $^\circ\text{C}$ for $T_A > +25^\circ\text{C}$

Electrical Characteristics

OFF Characteristics	Symbol	Minimum	Maximum	Units
Collector - Emitter Breakdown Voltage $I_C = 200 \text{ mAdc}$ 2N6676 2N6678	$V_{(BR)CEO}$	300 400	- - -	Vdc
Collector - Emitter Cutoff Current $V_{CE} = 450 \text{ Vdc}, V_{BE} = -1.5 \text{ Vdc}$ $V_{CE} = 650 \text{ Vdc}, V_{BE} = -1.5 \text{ Vdc}$ 2N6676 2N6678	I_{CEX}	- - -	1.0	μAdc
Emitter - Base Cutoff Current $V_{EB} = 7.0 \text{ Vdc}$	I_{EBO}	- - -	2.0	mAdc
Collector - Base Cutoff Current $V_{CB} = 450 \text{ Vdc}$ $V_{CB} = 650 \text{ Vdc}$ 2N6676 2N6678	I_{CBO}	- - - - - -	1.0 1.0	mAdc




Electrical Characteristics -con't

ON Characteristics ⁽²⁾		Symbol	Minimum	Maximum	Unit
Forward Current Transfer Ratio $I_C = 1.0 \text{ Adc}$, $V_{CE} = 3.0 \text{ Vdc}$ $I_C = 15.0 \text{ Adc}$, $V_{CE} = 3.0 \text{ Vdc}$		H_{FE}	15 8	40 20	
Collector - Emitter Saturation Voltage $I_C = 15.0 \text{ Adc}$, $I_B = 3.0 \text{ Adc}$		$V_{CE(sat)}$	- - -	1.0	Vdc
Base - Emitter Saturation Voltage $I_C = 15.0 \text{ Adc}$, $I_B = 3.0 \text{ Vdc}$		$V_{BE(sat)}$	- - -	1.5	Vdc
DYNAMIC Characteristic					
Small-Signal Short-Circuit Forward Current Transfer Ratio $I_C = 1.0 \text{ Adc}$, $V_{CE} = 10 \text{ Vdc}$, $f = 5.0 \text{ kHz}$		$ h_{fe} $	3.0	10	
Output Capacitance $V_{CB} = 10 \text{ Vdc}$, $I_E = 0$, $100 \text{ kHz} \leq f \leq 1.0 \text{ MHz}$		C_{obo}	150	500	pF
Switching Characteristic					
Delay Time		t_d		0.1	μs
Rise Time		t_r		0.6	μs
Storage Time		t_s		2.5	μs
Fall Time		t_f		0.5	μs
Cross-Over Time		t_c		0.5	μs
SAFE OPERATING AREA					
DC Tests: $T_C = +25^\circ\text{C}$, 1 Cycle, $t = 1.0 \text{ s}$ (See Figure 4 of MIL-PRF-19500/537) Test 1: $V_{CE} = 11.7 \text{ Vdc}$, $I_C = 15 \text{ Adc}$ Test 2: $V_{CE} = 30 \text{ Vdc}$, $I_C = 5.9 \text{ Adc}$ Test 3: $V_{CE} = 100 \text{ Vdc}$, $I_C = 0.25 \text{ Adc}$ Test 5: $V_{CE} = 300 \text{ Vdc}$, $I_C = 20 \text{ mAdc}$ 2N6676 $V_{CE} = 400 \text{ Vdc}$, $I_C = 10 \text{ mAdc}$ 2N6678 Clamped Switching $T_A = 25^\circ\text{C}$, $V_{CC} = 15 \text{ Vdc}$ $I_C = 15 \text{ Adc}$, Clamp Voltage = 350 2N6676 $I_C = 15 \text{ Adc}$, Clamp Voltage = 450 2N6678					

(2) Pulse Test: Pulse Width = 300 μs , Duty Cycle $\leq 2.0\%$.

Outline Drawing

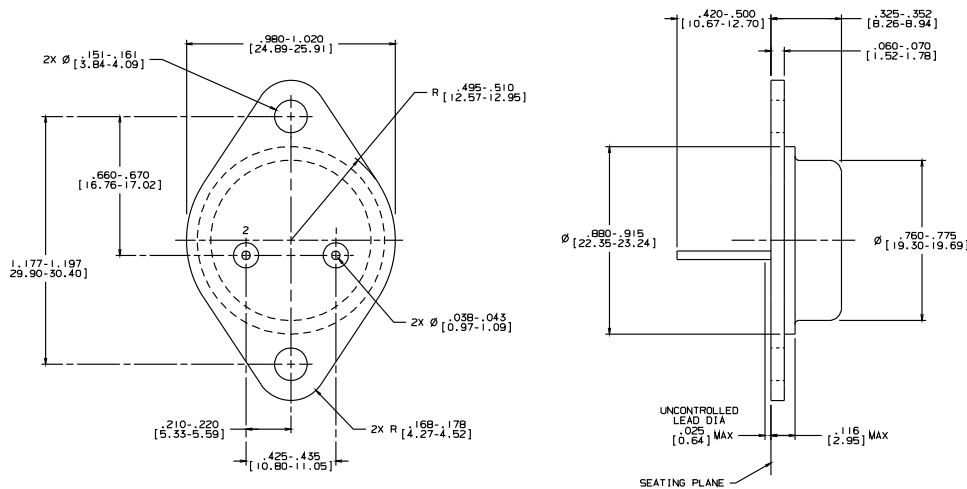

Aeroflex / Metelics, Inc.

975 Stewart Drive,
Sunnyvale, CA 94085
Tel: (408) 737-8181
Fax: (408) 733-7645

Sales: 888-641-SEMI (7364)

Hi-Rel Components

9 Hampshire Street,
Lawrence, MA 01840
Tel: (603) 641-3800
Fax: (978) 683-3264

www.aeroflex.com/metelics-hirelcomponents

54 Grenier Field Road,
Londonderry, NH 03053
Tel: (603) 641-3800
Fax: (603)-641-3500

ISO 9001: 2008 certified companies

www.aeroflex.com/metelics metelics-sales@aeroflex.com

Aeroflex / Metelics, Inc. reserves the right to make changes to any products and services herein at any time without notice. Consult Aeroflex or an authorized sales representative to verify that the information in this data sheet is current before using this product. Aeroflex does not assume any responsibility or liability arising out of the application or use of any product or service described herein, except as expressly agreed to in writing by Aeroflex; nor does the purchase, lease, or use of a product or service from Aeroflex convey a license under any patent rights, copyrights, trademark rights, or any other of the intellectual rights of Aeroflex or of third parties.

Copyright 2011 Aeroflex / Metelics. All rights reserved.



Our passion for performance is defined by three attributes represented by these three icons: solution-minded, performance-driven and customer-focused.

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- ⊖ View [JANTXV2N6678](#) on WIN SOURCE
- ⊖ [Aeroflex Metelics, Division of MACOM](#) Information

Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management