

2SD2242, 2SD2242A

Silicon NPN triple diffusion planar type Darlington

For power amplification

■ Features

- High forward current transfer ratio h_{FE}
- High-speed switching
- Allowing supply with the radial taping

■ Absolute Maximum Ratings $T_C = 25^\circ\text{C}$


Parameter	Symbol	Rating	Unit	
Collector to base voltage	2SD2242	V_{CBO}	60	V
	2SD2242A		80	
Collector to emitter voltage	2SD2242	V_{CEO}	60	V
	2SD2242A		80	
Emitter to base voltage	V_{EBO}	5	V	
Peak collector current	I_{CP}	8	A	
Collector current	I_C	4	A	
Collector power dissipation	$T_C = 25^\circ\text{C}$	P_C	15	W
	$T_a = 25^\circ\text{C}$		2	
Junction temperature	T_j	150	$^\circ\text{C}$	
Storage temperature	T_{stg}	-55 to +150	$^\circ\text{C}$	

■ Electrical Characteristics $T_C = 25^\circ\text{C}$


Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Collector cutoff current	2SD2242	$V_{CB} = 60\text{ V}, I_E = 0$			200	μA
	2SD2242A	$V_{CB} = 80\text{ V}, I_E = 0$			200	
Collector cutoff current	2SD2242	$V_{CE} = 30\text{ V}, I_B = 0$			500	μA
	2SD2242A	$V_{CE} = 40\text{ V}, I_B = 0$			500	
Emitter cutoff current	I_{EBO}	$V_{EB} = 5\text{ V}, I_C = 0$			2	μA
Collector to emitter voltage	2SD2242	$I_C = 30\text{ mA}, I_B = 0$	60			V
	2SD2242A		80			
Forward current transfer ratio	h_{FE1}	$V_{CE} = 3\text{ V}, I_C = 0.5\text{ A}$	1 000			
	h_{FE2}^*	$V_{CE} = 3\text{ V}, I_C = 3\text{ A}$	2 000		10 000	
Base to emitter voltage	V_{BE}	$V_{CE} = 3\text{ V}, I_C = 3\text{ A}$			2.5	V
Collector to emitter saturation voltage	$V_{CE(sat)}$	$I_C = 3\text{ A}, I_B = 12\text{ mA}$			2	V
		$I_C = 5\text{ A}, I_B = 20\text{ mA}$			4	
Transition frequency	f_T	$V_{CE} = 10\text{ V}, I_C = 0.5\text{ A}, f = 1\text{ MHz}$		20		MHz
Turn-on time	t_{on}	$I_C = 3\text{ A}, I_{B1} = 12\text{ mA}, I_{B2} = -12\text{ mA}$		0.5		μs
Storage time	t_{stg}	$V_{CC} = 50\text{ V}$		4		μs
Fall time	t_f			1		μs









Note) *: Rank classification

Rank	Q	R
h_{FE2}	2 000 to 5 000	4 000 to 10 000

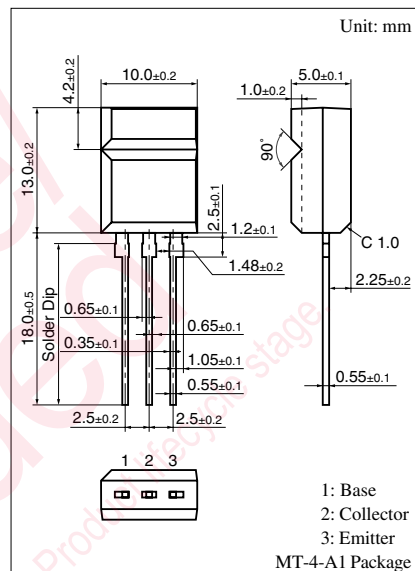

Internal Connection

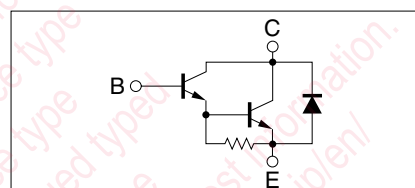

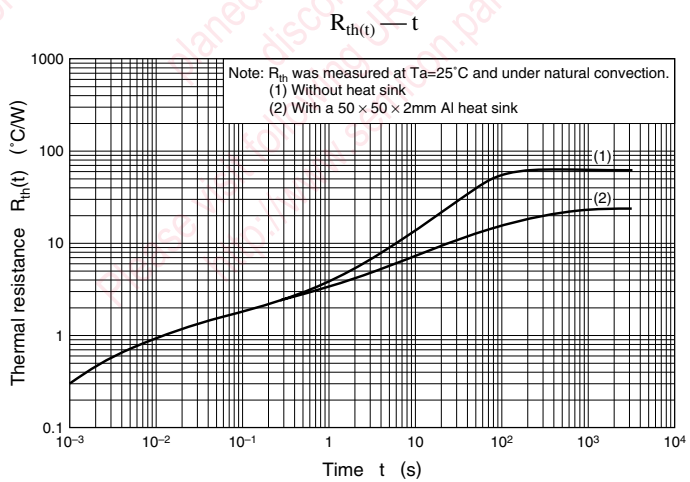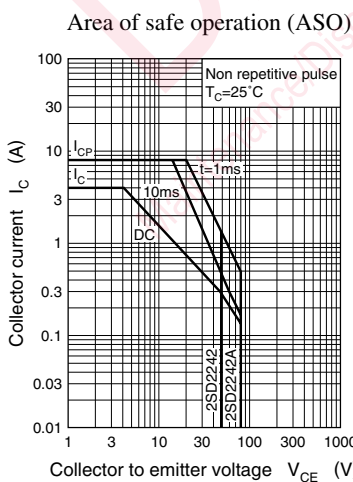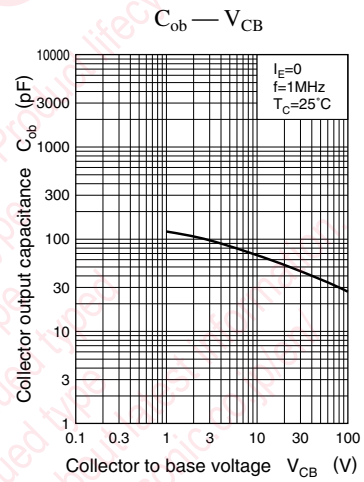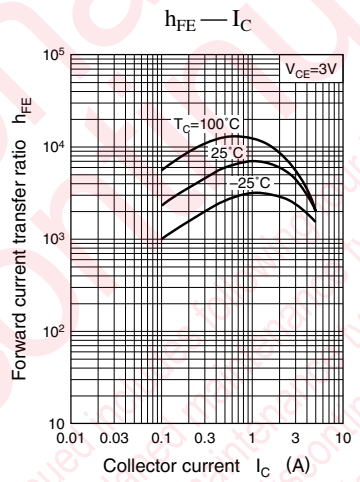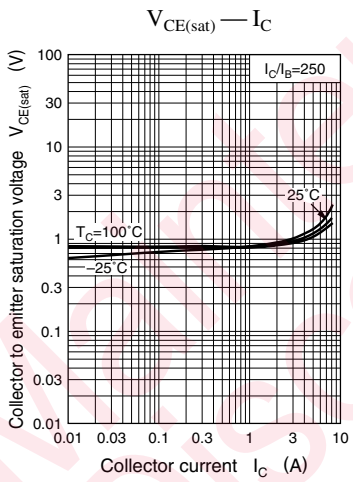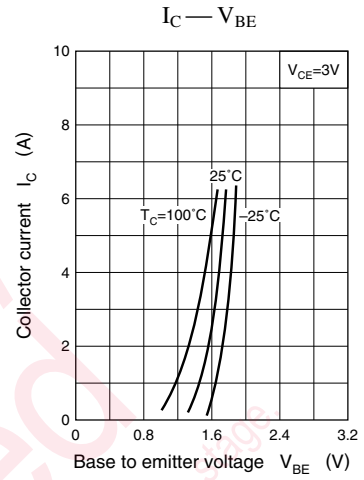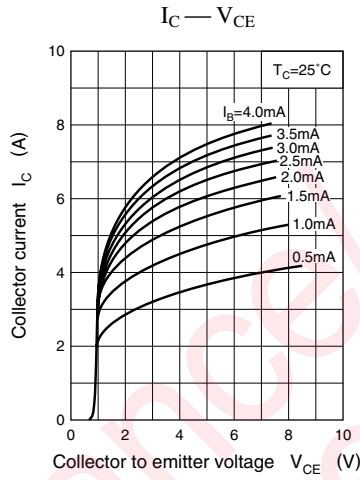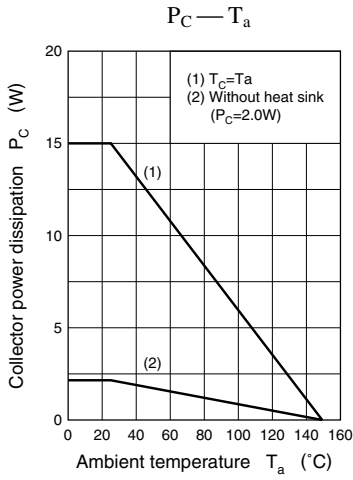

utions in using the technical information and scribed in this book

s book is to be exported or provided to non-residents, the laws and
rd to security export control, must be observed.

ly to show the main characteristics and application circuit examples
l property right or other right owned by our company or any other
any as to the infringement upon any such right owned by any other
rmation described in this book.

standard applications or general electronic equipment (such as office
and household appliances).

ng applications:

biles, traffic control equipment, combustion equipment, life support
reliability are required, or if the failure or malfunction of the prod-

ck are subject to change without notice for modification and/or im-
use of the products, therefore, ask for the most up-to-date Product
atisfy your requirements.

bsolute maximum rating and the guaranteed operating conditions
(.). Especially, please be careful not to exceed the range of absolute
er-off and mode-switching. Otherwise, we will not be liable for any



take into the consideration of incidence of break down and failure
n the systems such as redundant design, arresting the spread of fire
al injury, fire, social damages, for example, by using the products.

own and characteristics change due to external factors (ESD, EOS,
mounting or at customer's process. When using products for which
shelf life and the elapsed time since first opening the packages.

ly or partially, without the prior written permission of Matsushita

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View 2SD22420PA on WIN SOURCE](#)
-  [Panasonic Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management