
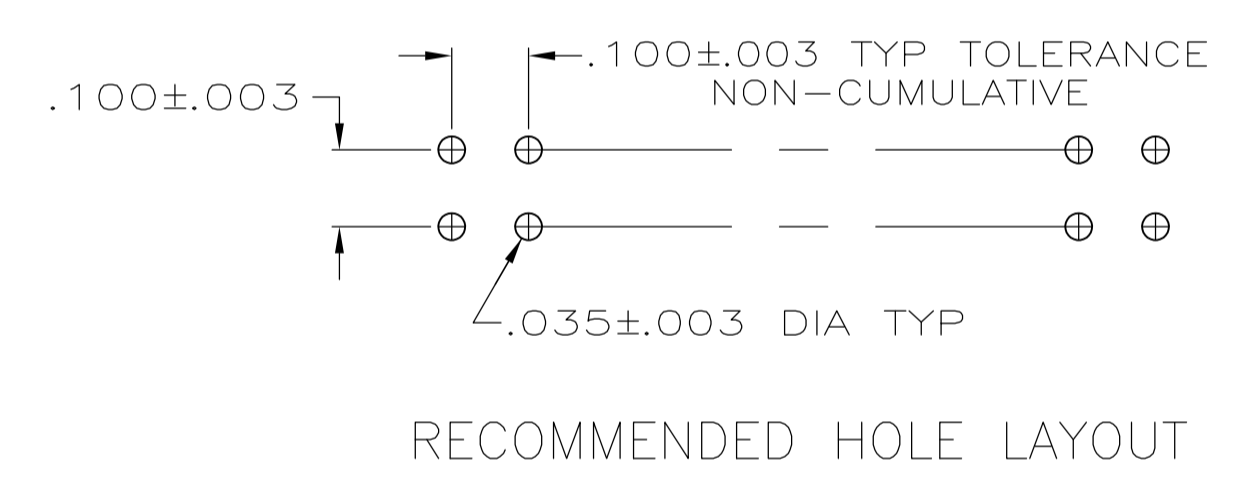


- ① THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
- ② POINT OF MEASUREMENT FOR PLATING THICKNESS.
- ③ ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
- ④ BREAKAWY NOTCH ANGLE CAN BE ORIENTED TO THE RIGHT (AS SHOWN) OR TO THE LEFT
- ⑤ .000015 GOLD IN THE CONTACT AREA, .000100-.000200 MATTE TIN-LEAD ON THE SOLDER TAIL, .000050 NICKEL ALL OVER.
- ⑥ .000015 GOLD IN THE CONTACT AREA, .000100-.000200 MATTE TIN ON THE SOLDER TAIL, .000050 NICKEL ALL OVER.
- ⑦ MATERIAL:
HOUSING- FLAME RETARDANT THERMOPLASTIC, COLOR-BLACK
POSTS- COPPER ALLOY
- ⑧ HIGH TEMPERATURE CONFIGURATION.
- ⑨ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

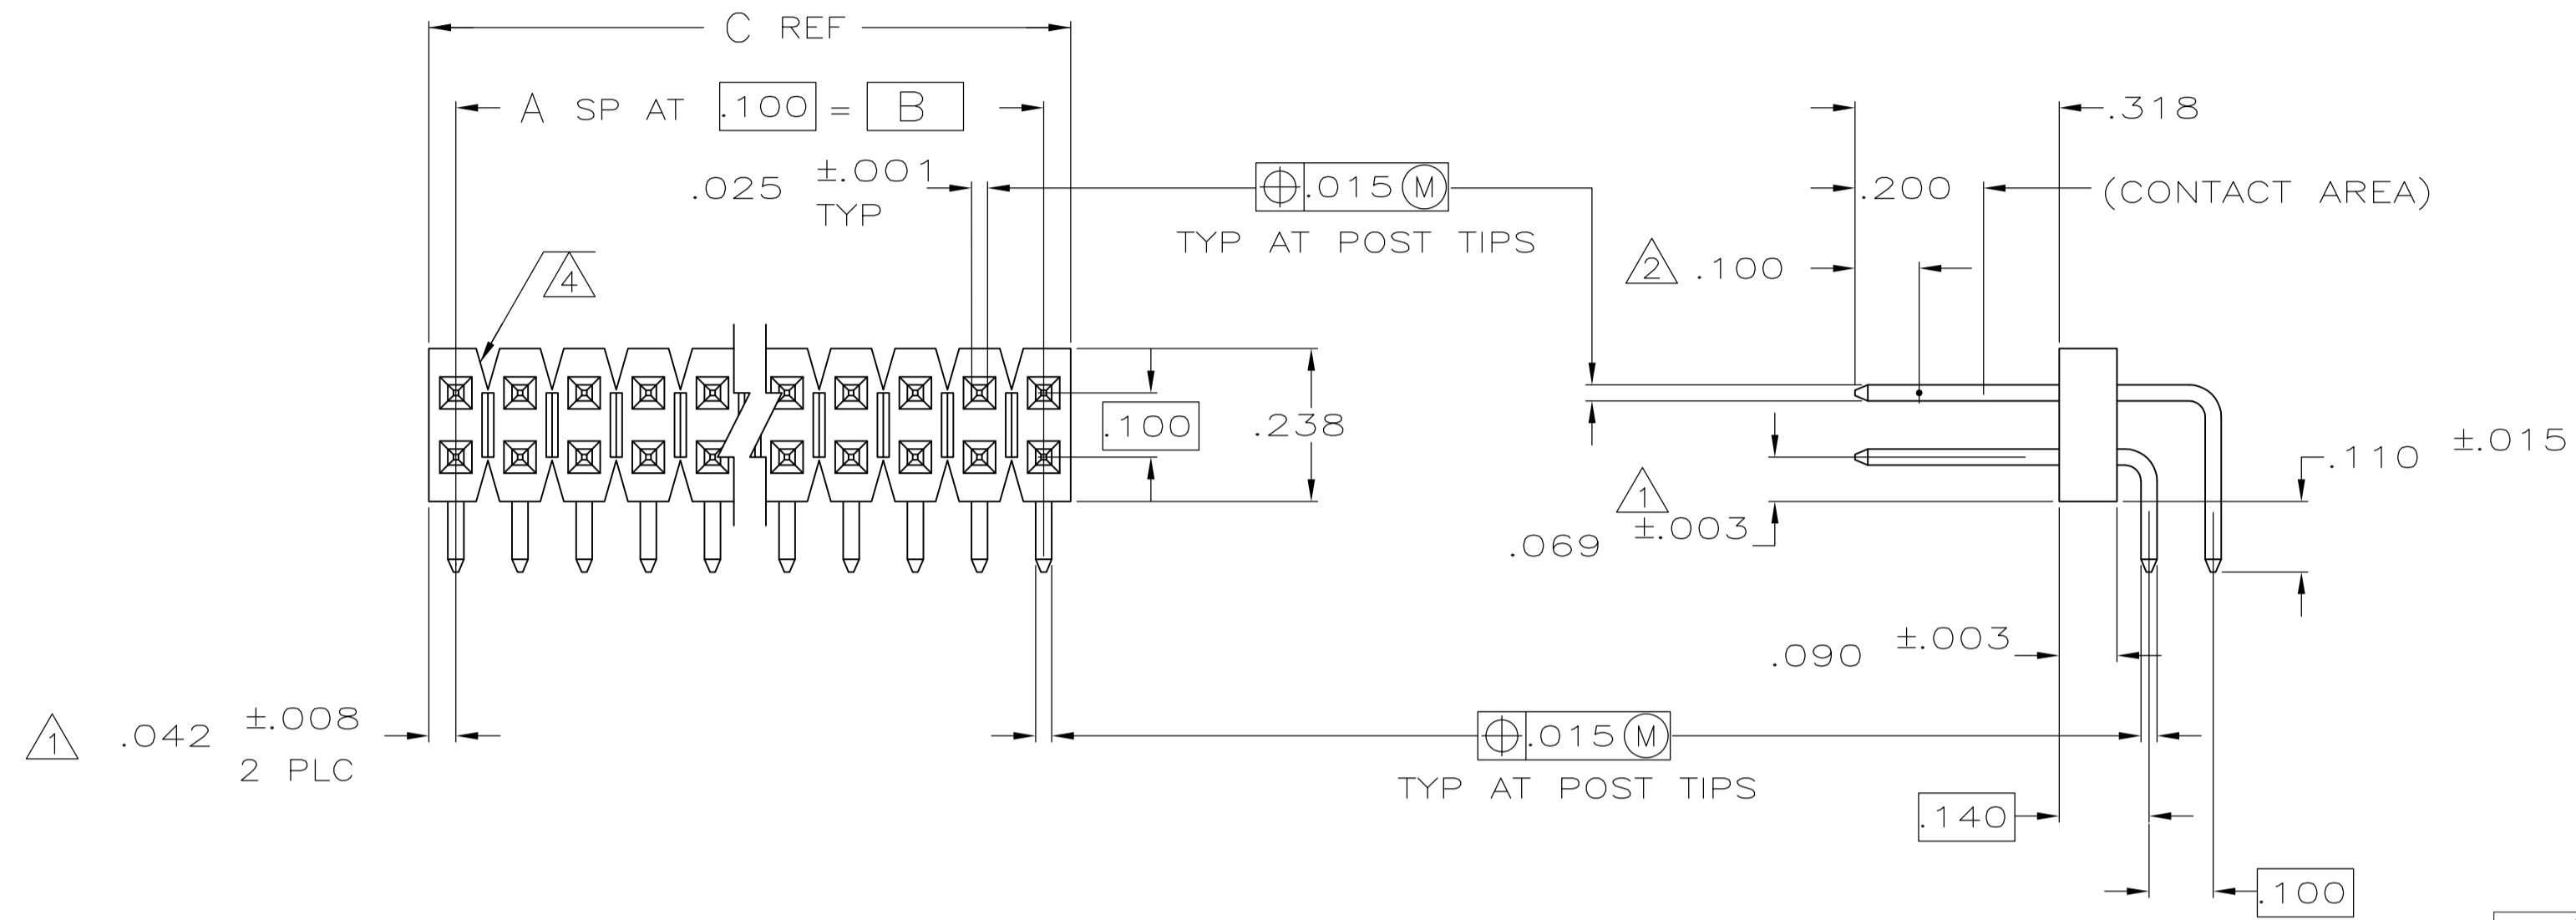

REMARKS	PLATING	C	B	A	NO OF POSN	ASSEMBLY PART NUMBER
⑨		3.984	3.900	39	80	9-102975-0
⑧		3.884	3.800	38	78	8-102975-9
⑧		3.784	3.700	37	76	8-102975-8
⑧		3.684	3.600	36	74	8-102975-7
⑧		3.584	3.500	35	72	8-102975-6
⑧		3.484	3.400	34	70	8-102975-5
⑧		3.384	3.300	33	68	8-102975-4
⑧		3.284	3.200	32	66	8-102975-3
⑧		3.184	3.100	31	64	8-102975-2
⑧		3.084	3.000	30	62	8-102975-1
⑧		2.984	2.900	29	60	8-102975-0
⑧		2.884	2.800	28	58	7-102975-9
⑧		2.784	2.700	27	56	7-102975-8
⑧		2.684	2.600	26	54	7-102975-7
⑧		2.584	2.500	25	52	7-102975-6
⑧		2.484	2.400	24	50	7-102975-5
⑧		2.384	2.300	23	48	7-102975-4
⑧		2.284	2.200	22	46	7-102975-3
⑧		2.184	2.100	21	44	7-102975-2
⑧		2.084	2.000	20	42	7-102975-1
⑧		1.984	1.900	19	40	7-102975-0
⑧		1.884	1.800	18	38	6-102975-9
⑧		1.784	1.700	17	36	6-102975-8
⑧		1.684	1.600	16	34	6-102975-7
⑧		1.584	1.500	15	32	6-102975-6
⑧		1.484	1.400	14	30	6-102975-5
⑧		1.384	1.300	13	28	6-102975-4
⑧		1.284	1.200	12	26	6-102975-3
⑧		1.184	1.100	11	24	6-102975-2
⑧		1.084	1.000	10	22	6-102975-1
⑧		.984	.900	9	20	6-102975-0
⑧		.884	.800	8	18	5-102975-9
⑧		.784	.700	7	16	5-102975-8
⑧		.684	.600	6	14	5-102975-7
⑧		.584	.500	5	12	5-102975-6
⑧		.484	.400	4	10	5-102975-5
⑧		.384	.300	3	8	5-102975-4
⑧		.284	.200	2	6	5-102975-3
⑧		.184	.100	1	4	5-102975-2
⑧		.084	—	—	2	5-102975-1

—	⑤	3.984	3.900	39	80	4-102975-0
—	⑤	3.884	3.800	38	78	3-102975-9
—	⑤	3.784	3.700	37	76	3-102975-8
—	⑤	3.684	3.600	36	74	3-102975-7
—	⑤	3.584	3.500	35	72	3-102975-6
—	⑤	3.484	3.400	34	70	3-102975-5
—	⑤	3.384	3.300	33	68	3-102975-4
—	⑤	3.284	3.200	32	66	3-102975-3
—	⑤	3.184	3.100	31	64	3-102975-2
—	⑤	3.084	3.000	30	62	3-102975-1
—	⑤	2.984	2.900	29	60	3-102975-0
—	⑤	2.884	2.800	28	58	2-102975-9
—	⑤	2.784	2.700	27	56	2-102975-8
—	⑤	2.684	2.600	26	54	2-102975-7
—	⑤	2.584	2.500	25	52	2-102975-6
—	⑤	2.484	2.400	24	50	2-102975-5
⑨	⑤	2.384	2.300	23	48	2-102975-4
—	⑤	2.284	2.200	22	46	2-102975-3
—	⑤	2.184	2.100	21	44	2-102975-2
—	⑤	2.084	2.000	20	42	2-102975-1
—	⑤	1.984	1.900	19	40	2-102975-0
⑨	⑤	1.884	1.800	18	38	1-102975-9
—	⑤	1.784	1.700	17	36	1-102975-8
⑨	⑤	1.684	1.600	16	34	1-102975-7
—	⑤	1.584	1.500	15	32	1-102975-6
—	⑤	1.484	1.400	14	30	1-102975-5
—	⑤	1.384	1.300	13	28	1-102975-4
—	⑤	1.284	1.200	12	26	1-102975-3
⑨	⑤	1.184	1.100	11	24	1-102975-2
—	⑤	1.084	1.000	10	22	1-102975-1
—	⑤	.984	.900	9	20	1-102975-0
⑨	⑤	.884	.800	8	18	102975-9
—	⑤	.784	.700	7	16	102975-8
SUPERSEDED	⑤	.684	.600	6	14	102975-7
—	⑤	.584	.500	5	12	102975-6
—	⑤	.484	.400	4	10	102975-5
—	⑤	.384	.300	3	8	102975-4
SUPERSEDED	⑤	.284	.200	2	6	102975-3
—	⑤	.184	.100	1	4	102975-2
⑨	⑤	.084	—	—	2	102975-1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DIN R BROWN 01FEB2006	TE Connectivity
0 PLC ± -	1 PLC ± -	CHK J GEFSEFORD 01FEB2006	NAME
2 PLC ± -	3 PLC ± .005	APVD J GEFSEFORD 01FEB2006	PRODUCT SPEC
4 PLC ± -	ANGLES ± -	APPLICATION SPEC	SIZE
MATERIAL	FINISH SEE TABLE	WEIGHT	CAGE CODE DRAWING NO
			A1 00779 C=102975
		CUSTOMER DRAWING	SCALE 4:1 SHEET 1 OF 1 REV G

HEADER ASSY, MOD II, BREAKAWAY, DOUBLE ROW, .100X.100 CL, RIGHT ANGLE WITH .025 SQ POSTS

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View 5-102975-4 on WIN SOURCE](#)

 [TE Connectivity](#) Information

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management