




THE DATASHEET OF BC4AAB-CY




Date	SYM	DR
05/05/17	E	D
		A

Ø2.90 [Ø0.11]

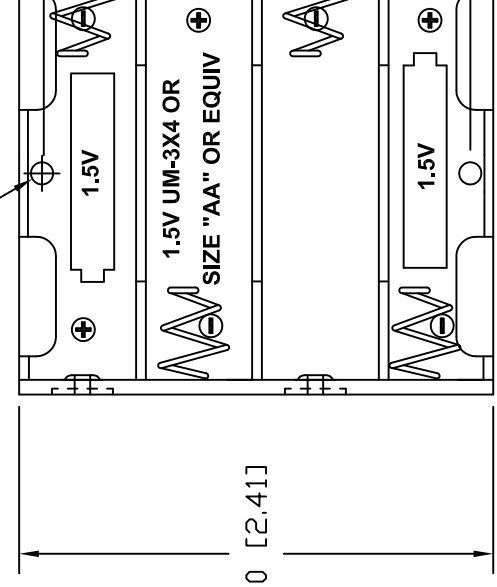


61.30 [2.41]

56.80 [2.236]

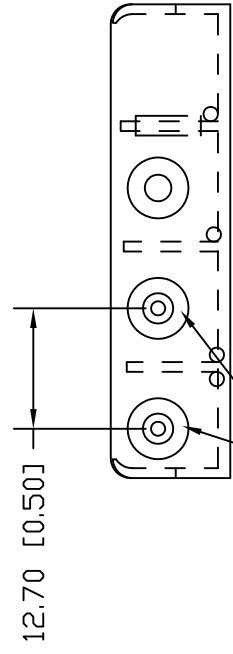


12.70 [0.50]



15.50 [0.61]


BUMP PLATES

Tolerance (Inches)	 Memory Protection 200 Broad Hollow Road
Decimal	
±.5 (.020)	
Fractional	
± .8 (.030)	Title 4 "AA" BATTERY
Angular	Date 05/05/17
± 3°	Drawing Number B

MATERIAL:
 HOUSING: POLYPROPYLENE
 FLAMMABILITY RATING -UL94 HB, UL FILE NO. E216959
 TEMPERATURE RANGE: -10°C to +100°C
 SPRINGS: SPRING STEEL, NICKEL PLATED
 RIVETS: BRASS, NICKEL PLATED
 CONTACT RESISTANCE: UNDER 50mΩ FOR +/- CONTACTS
 PER EIA-540J000
 ROHS COMPLIANT

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View BC4AAB-CY on WIN SOURCE](#)
-  [MPD \(Memory Protection Devices\) Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management