



# THE DATASHEET OF CDPH64NP-100NC



# SMD Power Inductor CDPH64



## Description

- Ferrite core construction.
- Magnetically shielded.
- L × W × H: 6.9 × 6.2 × 5.0mm Max.
- Product weight: 0.6g(Ref.)
- Moisture Sensitivity Level: 1
- RoHS compliance.

## Environmental Data

- Operating temperature range: -40°C~+100°C (including coil's self temperature rise)
- Storage temperature range: -40°C~+100°C
- Solder reflow temperature: 260 °C peak.


## Packaging

- Carrier tape and reel packaging.
- 12.9" diameter reel
- 1000pcs per reel


## Applications

- Ideally used in Notebook PC, DVD, LCD TV, Game machine, STB etc as DC-DC converter inductors.

## Dimension - [mm]

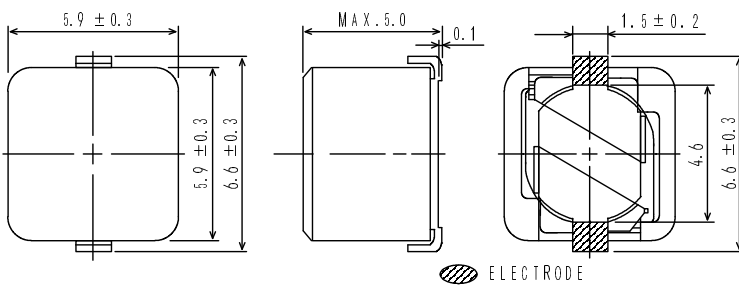

## Land pattern and Schematics - [mm]

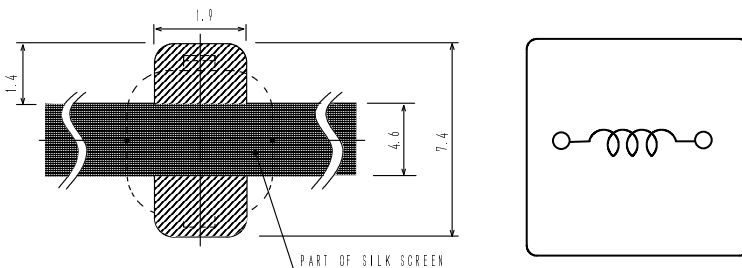

# SMD Power Inductor CDPH64



## Electrical Characteristics

Part Name	Stamp	Inductance ( $\mu$ H) [ within ] ※1	D.C.R.( $\Omega$ ) Max. (Typ.) (at 20°C)	Rated Current (A) ※2
CDPH64NP-100NC	100	+25% 10-20%	0.12(89m)	1.32
CDPH64NP-120NC	120	+25% 12-20%	0.13(98m)	1.16
CDPH64NP-150NC	150	+25% 15-20%	0.14(0.11)	1.09
CDPH64NP-180NC	180	+25% 18-20%	0.15(0.12)	1.00
CDPH64NP-220NC	220	+25% 22-20%	0.18(0.14)	0.92
CDPH64NP-270NC	270	+25% 27-20%	0.24(0.18)	0.82
CDPH64NP-330NC	330	+25% 33-20%	0.27(0.21)	0.73
CDPH64NP-390NC	390	+25% 39-20%	0.31(0.24)	0.67
CDPH64NP-470NC	470	+25% 47-20%	0.38(0.29)	0.61
CDPH64NP-560NC	560	+25% 56-20%	0.44(0.34)	0.58
CDPH64NP-680NC	680	+25% 68-20%	0.49(0.37)	0.50
CDPH64NP-820NC	820	+25% 82-20%	0.59(0.45)	0.46
CDPH64NP-101NC	101	+25% 100-20%	0.66(0.51)	0.38
CDPH64NP-121NC	121	+25% 120-20%	0.73(0.56)	0.37
CDPH64NP-151NC	151	+25% 150-20%	1.27(0.98)	0.34
CDPH64NP-181NC	181	+25% 180-20%	1.42(1.09)	0.30
CDPH64NP-221NC	221	+25% 220-20%	1.52(1.17)	0.27
CDPH64NP-271NC	271	+25% 270-20%	2.30(1.77)	0.25
CDPH64NP-331NC	331	+25% 330-20%	2.62(2.02)	0.22
CDPH64NP-391NC	391	+25% 390-20%	2.88(2.21)	0.20

※1. Inductance measuring condition: at 1kHz.













※2. Rated current: The DC current at which the inductance decreases to 75% of its nominal value or when  $\Delta t=40^\circ\text{C}$ , whichever is lower ( $T_a=20^\circ\text{C}$ ).

# SMD Power Inductor CDPH64



## Saturation Current & Temperature Rise Graph

— L (20°C) — L (100°C) —  $\Delta T$

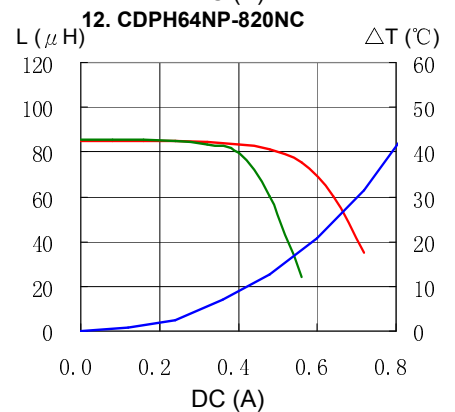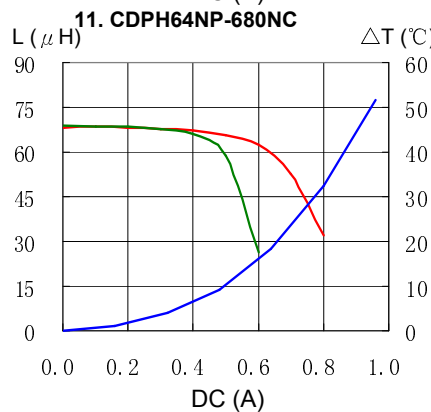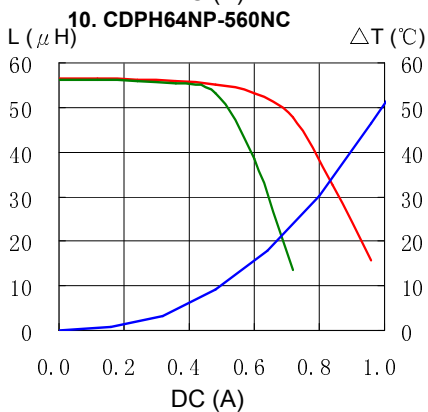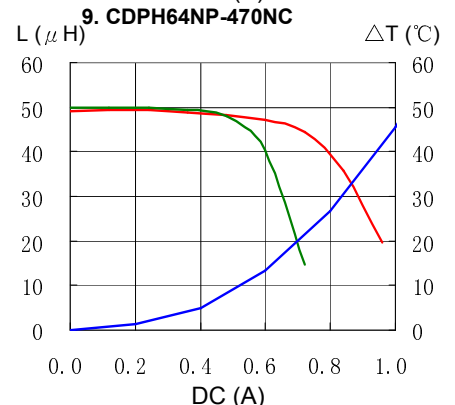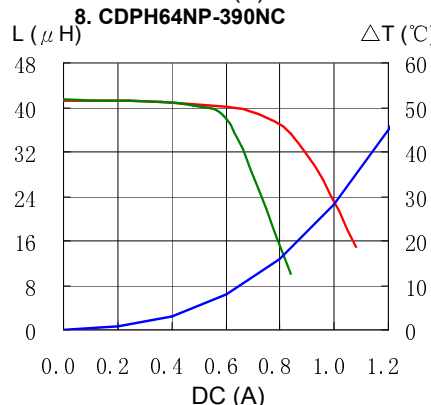
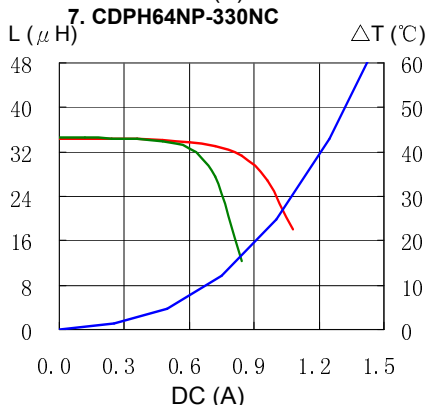
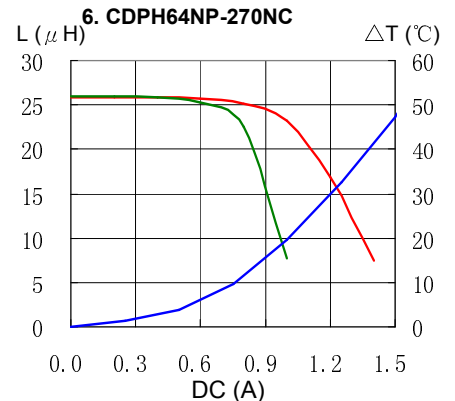
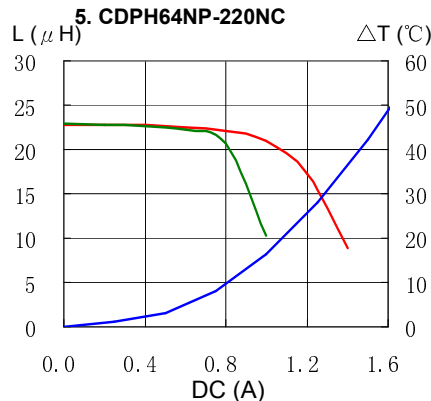
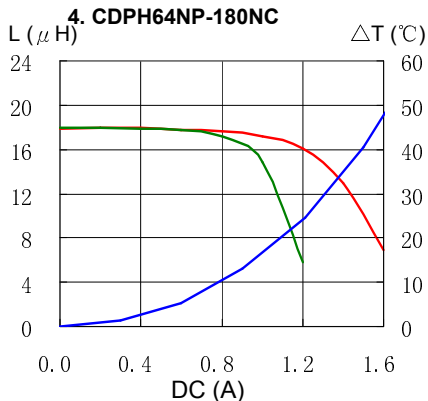
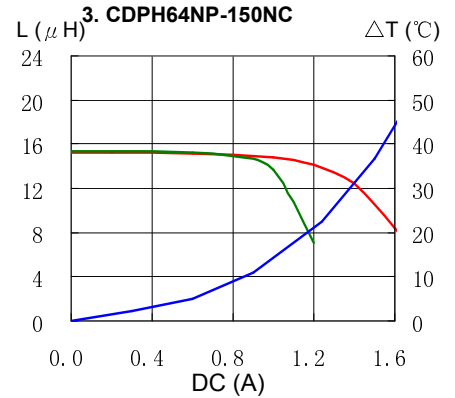
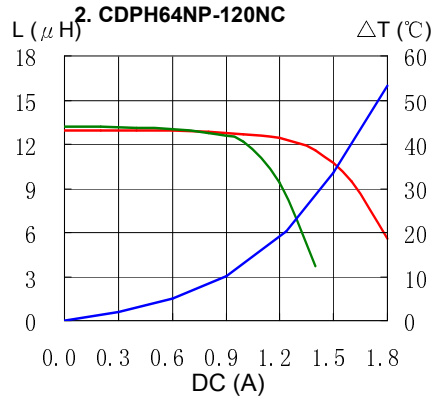
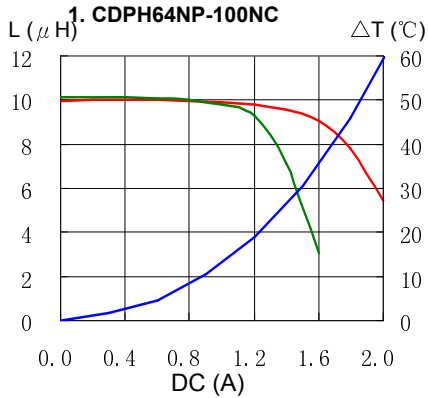


# SMD Power Inductor CDPH64



## Saturation Current & Temperature Rise Graph



— L (20°C) — L (100°C) —  $\Delta T$

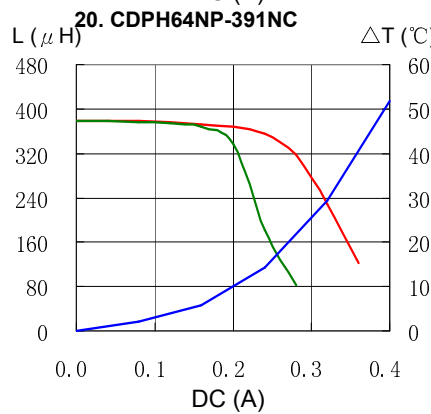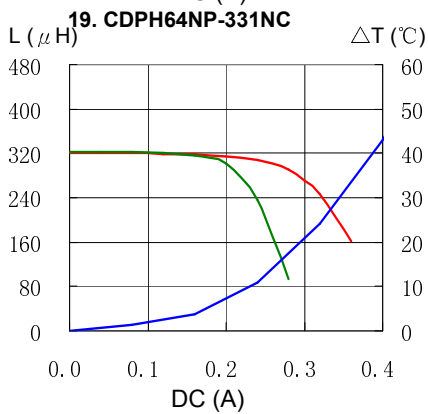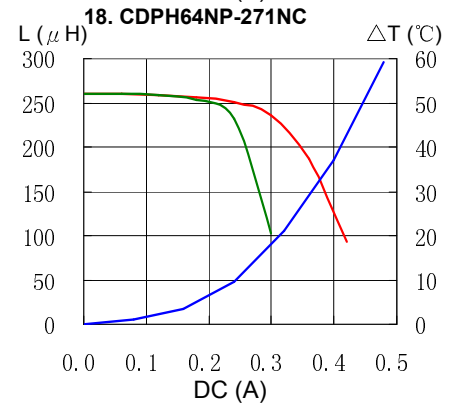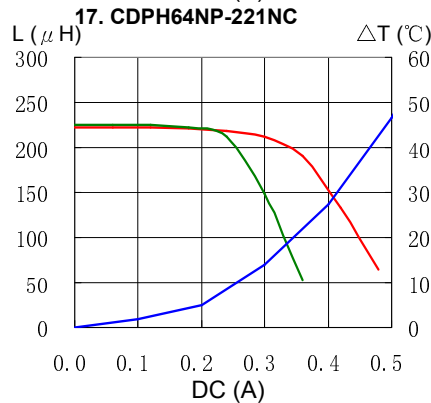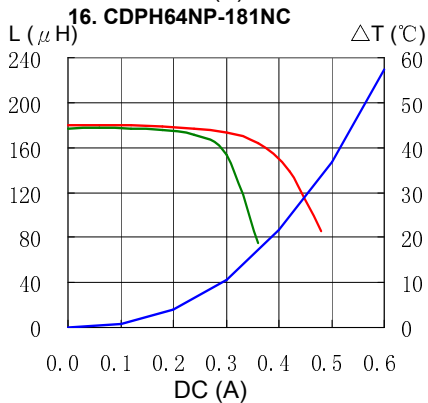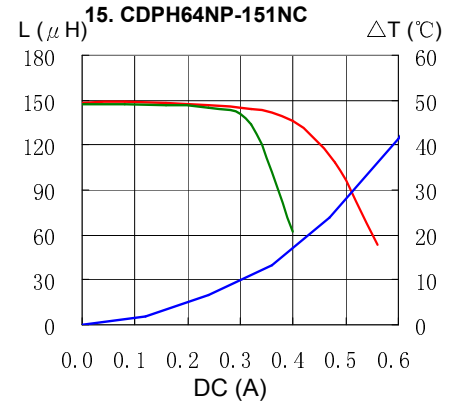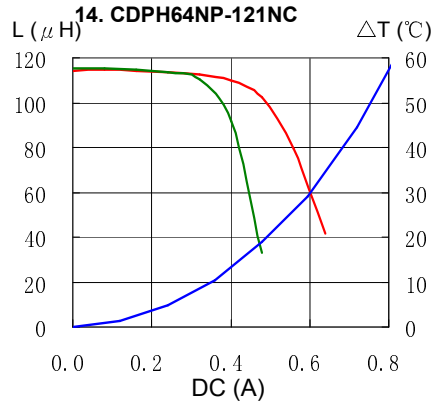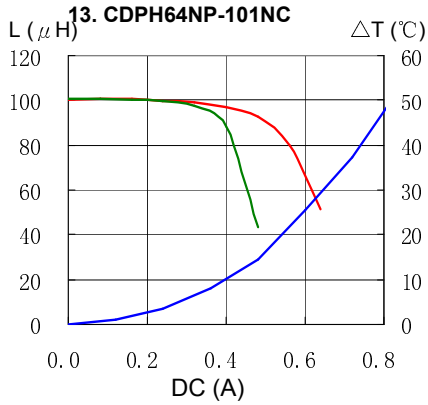

# SMD Power Inductor CDPH64



## Solder Reflow Condition

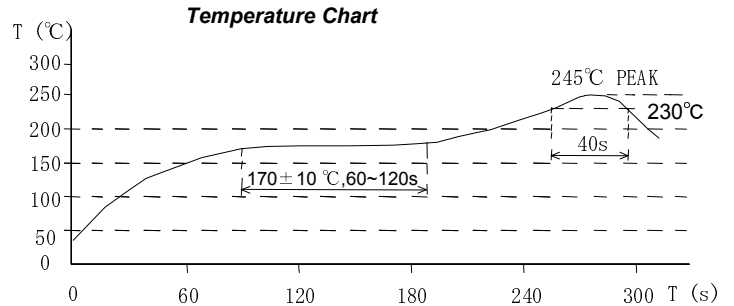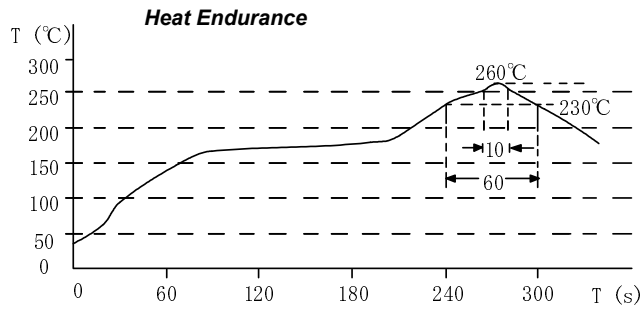

Please refer to the sales offices on our website - <http://www.sumida.com>

### Hong Kong

Tel.+852-2880-6781  
FAX.+852-2565-9600  
[sales@hk.sumida.com](mailto:sales@hk.sumida.com)

### Saitama(Japan)

Tel.+81-48-691-7300  
FAX.+81-48-691-7340  
[sales@jp.sumida.com](mailto:sales@jp.sumida.com)

### Chicago

Tel.+1-847-545-6700  
FAX. +1-847-545-6720  
[sales@us.sumida.com](mailto:sales@us.sumida.com)

### Shanghai

Tel.+86-21-5836-3299  
FAX.+86-21-5836-3266  
[shanghai.sales@cn.sumida.com](mailto:shanghai.sales@cn.sumida.com)

### Seoul

Tel.+82-2-6237-0777  
FAX.+82-2-6237-0778  
[sales@kr.sumida.com](mailto:sales@kr.sumida.com)

### Oberzell

Tel.+49-8591-937-0  
FAX. +49-8591-937-103  
[contact@eu.sumida.com](mailto:contact@eu.sumida.com)

### Shenzhen

Tel.+86-755-8291-0228  
FAX.+86-755-8291-0338  
[shenzhen.sales@cn.sumida.com](mailto:shenzhen.sales@cn.sumida.com)

### Singapore

Tel.+65-6296-3388  
FAX.+65-6841-4426  
[sales@sg.sumida.com](mailto:sales@sg.sumida.com)

### Neumarkt

Tel.+49-9181-4509-110  
FAX. +49-9181-4509-310  
[infocomp@eu.sumida.com](mailto:infocomp@eu.sumida.com)

### Taipei



Tel.+886-2-8751-2737  
FAX.+886-2-8751-2738  
[sales@tw.sumida.com](mailto:sales@tw.sumida.com)

### San Jose

Tel.+1-408-321-9660  
FAX.+1-408-321-9308  
[sales@us.sumida.com](mailto:sales@us.sumida.com)

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View CDPH64NP-100NC on WIN SOURCE](#)
-  [Sumida America Components Inc. Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management