



**THE DATASHEET OF  
CPL2510T2R2M**



# SMD Inductors(Coils) For Power Line(Wound, Magnetic Shielded)

Conformity to RoHS Directive

## CPL Series CPL2510

### FEATURES

- It delivers low Rdc with high I<sub>dc</sub>.
- It is lead-free compatible.  
The product contains no lead whatsoever.  
It is able to withstand high temperature reflows (260°C during the peak) used in lead-free soldering.


### APPLICATIONS

Portable audio visual devices (DSCs, DVCs, etc.)  
Mobile communication devices (cellular phones, etc.)  
Information devices (PCs, etc.)

### SPECIFICATIONS

Operating temperature range	-40 to +105°C [Including self-temperature rise]
Storage temperature range	-40 to +105°C

### RECOMMENDED SOLDERING CONDITIONS REFLOW SOLDERING

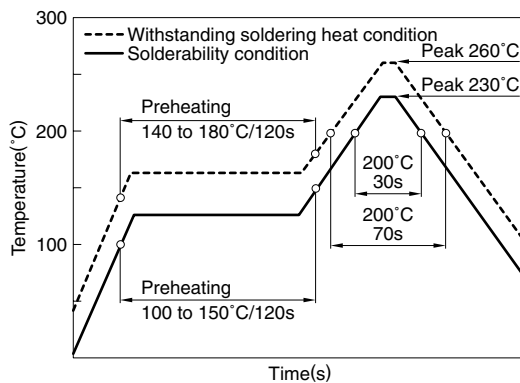

### PRODUCT IDENTIFICATION

CPL	2510	T	1R0	M
(1)	(2)	(3)	(4)	(5)

(1) Series name

(2) Dimensions

2510	2.5×1.5×1.0mm
------	---------------

(3) Packaging style

T	Taping
---	--------

(4) Inductance

1R0	1μH
-----	-----

(5) Inductance tolerance


M	±20%
---	------

### PACKAGING STYLE AND QUANTITIES

Packaging style	Quantity
Taping	2000 pieces/reel



- Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.
- Please contact our Sales office when your application are considered the following:  
The device's failure or malfunction may directly endanger human life (e.g. application for automobile/aircraft/medical/nuclear power devices, etc.)
- All specifications are subject to change without notice.

## SHAPES AND DIMENSIONS/CIRCUIT DIAGRAM/RECOMMENDED PC BOARD PATTERN




Weight: 16mg

Dimensions in mm

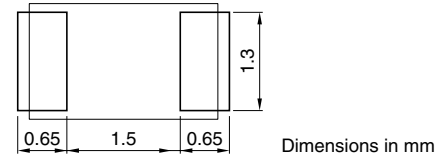

Dimensions in mm



## ELECTRICAL CHARACTERISTICS


Inductance (μH)	Inductance tolerance (%)	DC resistance (Ω)±30%	Rated current*1 (mA)max.	Rated current*2 (mA)max.	Part No.
1	±20	0.09	1200	1200	CPL2510T1R0M
1.5	±20	0.12	1000	1000	CPL2510T1R5M
2.2	±20	0.135	800	800	CPL2510T2R2M
3.3	±20	0.27	700	700	CPL2510T3R3M
4.7	±20	0.38	650	650	CPL2510T4R7M

\*1 Rated current based on inductance variation: Current when inductance decreases by 30% of the initial value due to direct current superimposed characteristics


\*2 Rated current based on increasing product temperature: Current when temperature of the product reaches +40°C

## TYPICAL ELECTRICAL CHARACTERISTICS


### INDUCTANCE vs. FREQUENCY CHARACTERISTICS

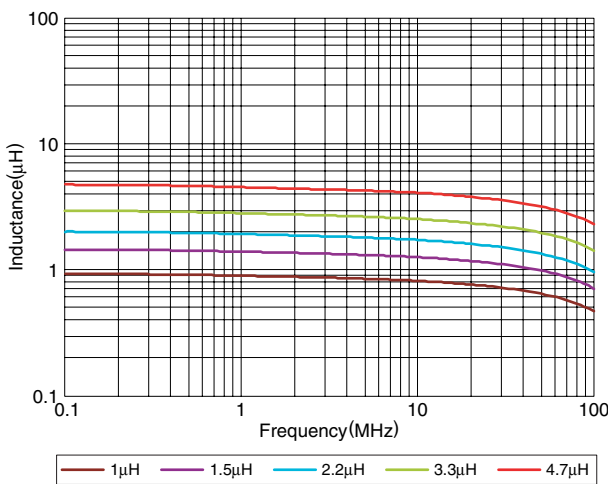


### INDUCTANCE vs. DC SUPERPOSITION CHARACTERISTICS

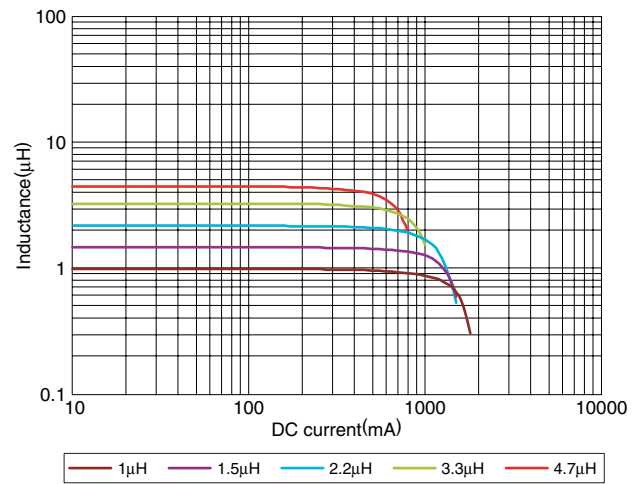

### IMPEDANCE vs. FREQUENCY CHARACTERISTICS

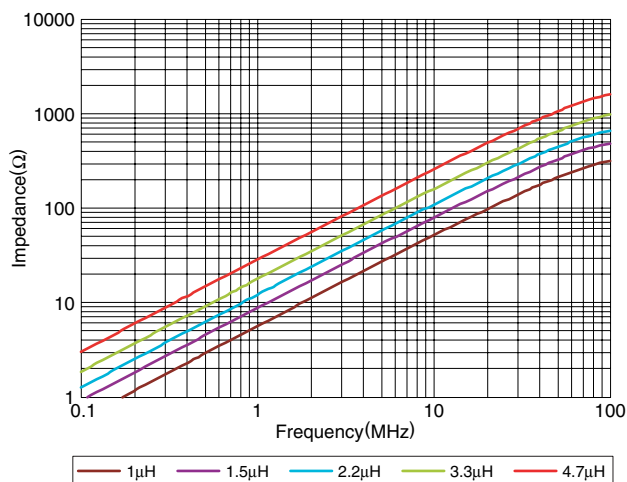

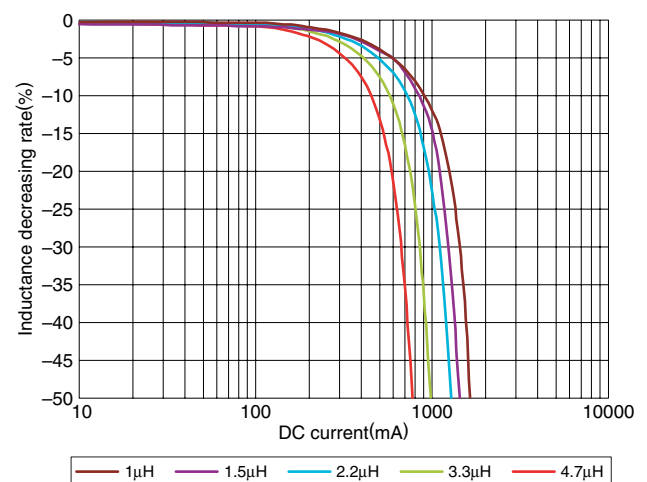

### DC SUPERPOSITION vs. INDUCTANCE DECREASING RATE



• All specifications are subject to change without notice.

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View CPL2510T2R2M on WIN SOURCE](#)
-  [TDK Corporation Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management