




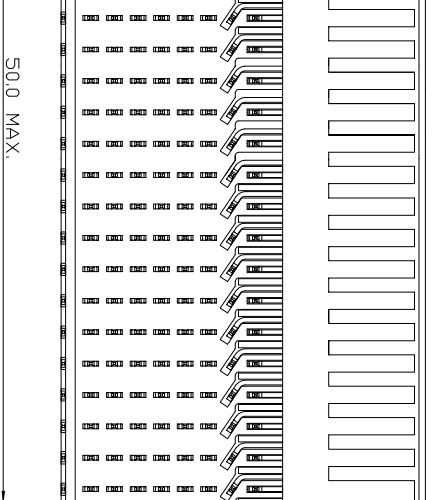


**THE DATASHEET OF
HM2R88PA810FN9LF**

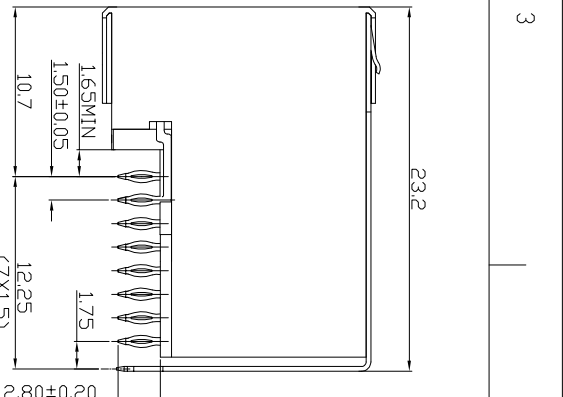

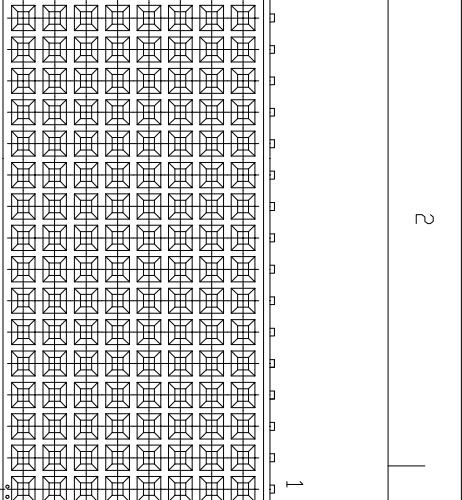

PERFORMANCE CHARACTERISTICS
 1.5A AT 20°C (FULLY LOADED)
 1 A AT 70°C (FULLY LOADED)
CURRENT RATING
 1 A AT 70°C (FULLY LOADED)
RATED VOLTAGE : 500 V AC (CONT /CONT)
OPERATING TEMPERATURE : -55°C TO 125°C
CONTACT RESISTANCE 20 mΩ MAX
INSERTION FORCE : 0.75N MAX/CONT
EXTRACTION FORCE : 0.15N MIN/CONT
INSULATION RESISTANCE : 10⁴ MΩ MIN



NOTES 1: LEAD FREE INDICATOR U-LEAD FREE
 PERFORMANCE LEVEL INDICATOR (REF: DWG NO:ISS: 2008444009)
 2. THIS PRODUCT IS CSA APPROVED. THIS PRODUCT IS UL RECOGNIZED.
 3. FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING : BSA463176200
 4. THIS PRODUCT (L/F) MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008



www.fciconnect.com		tolerance 1IPC ±0.2 1IPC 2IPC ±0.1 2IPC ANGLES 4° HEKKN		projection 		Scale MM 3/1	
FCI		MILLIPICS		A4		Rev. B	
Dr	M.Fret	04-01-00	Product family	MILIPICS		BSJC_202260J021	
Eng	Chm		Spec ref	Material		CUMSTOMER	
Appr				ECN		sheet 1 of 1	
rev	ecn no	dr	date	size		Rev.	
A	REVISION	KN	14-09-01	A4		B	
B	DOCS-0381	kasou	10-10-05	ECN			

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View HM2R88PA810FN9LF on WIN SOURCE](#)
-  [Amphenol FCI Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management