



**THE DATASHEET OF
LP8765RLE/NOPB**



LP8765

High Performance Power Management Unit for Handset Applications

General Description

The LP8765 is a complete Power Management Unit (PMU) designed for handset applications. The LP8765 PMU contains a 28V Over-Voltage Protection (OVP) single-input linear Li-Ion battery charger, backup battery charger, 10 low-dropout voltage regulators including 4 A-type LDOs, 4 D-type LDOs, one LILO LDO and one 28V OVP LDO, 2 high-efficiency buck regulators, 2 comparators, 3 current sinks, 12-bit ADC, real-time clock, 32 KHz OSC and one 2.5V reference output voltage. Programming is handled via a high-speed serial interface to program on/off conditions and output voltages of individual regulators, and to read status information of the PMU.

The LP8765 can safely charge and maintain a single cell Li-Ion battery operating from an AC adapter or USB power source.

The Li-Ion charger requires few external components and integrates the power FET. Charging is thermally regulated to obtain the most efficient charging rate for a given ambient temperature.

A built-in OVP circuit at the charger inputs protects the PMU from input voltages up to +28V, eliminating the need for any external protection circuitry.

Buck regulators have an automatic switch to PFM mode at low-load conditions providing very good efficiency at low-output currents.

A-type LDO regulators provide excellent PSRR and very low noise, 10 μ V typ., ideally suited for supplying voltage to RF section.

The real-time clock/calendar provides time interval information as well as two programmable alarms.

The current sink provides 4-bit current resolution with 6-bit PWM dimming, up to 120 mA maximum load current.

Two general-purpose comparators can be used for detecting external accessories like ear plugs, etc.

Features

- Linear Li-Ion Battery Charger with Single Input
50 mA to 1200 mA Charging Current
4.05V to 4.75V Termination Voltage
28V OVP on the VIN_CHG Input
Charging from either AC Adaptor or USB
- Two Synchronous Magnetic Buck Regulators
 I_{OUT} 600 mA and 500 mA
High-efficiency PFM mode @ low I_{OUT}
Auto-Mode PFM/PWM Switch
Programmable Peak Switching Current Limit
Low-Inductance 2.2 μ H @ 2 MHz Switching Frequency
3% Accurate Buck Regulators up to 90% Efficiency
- LDOs
4 x A-type LDOs (3 x 200 mA, 1 x 100 mA)
4 x D-type LDOs (2 x 200 mA, 1 x 300 mA, 1 x 400 mA)
1 x LILO LDO (1 x 300 mA)
1 x 28V OVP LDO for USB Transceiver (1 x 10 mA)
10 μ V noise on A-type LDOs
2% typ. Output Voltage Accuracy on LDOs
- 12-bit A/D Converter
- Three Controllable Current Sinks
- Two Comparators
- Interrupt Request to Reduce S/W Polling
- 32.786 KHz OSC
- Real-Time Clock with Two Programmable Alarms
- Thermal Shutdown with Early Warning Alarm
- 49-bump micro SMD package 3.7 x 3.7 mm, 0.5 mm pitch


Applications

- GSM, GPRS, EDGE, CDMA & 3G Handsets

Table of Contents


| | |
|--|----|
| General Description | 1 |
| Features | 1 |
| Applications | 1 |
| General Typical Application Diagram | 3 |
| Device Pin Diagram | 4 |
| Package Marking Information | 4 |
| Ordering Information | 4 |
| LP8765 Pin Descriptions | 5 |
| Device Operation Description | 6 |
| OPERATION MODES | 6 |
| POWER-ON AND POWER-OFF SEQUENCES | 8 |
| Support Functions | 10 |
| REFERENCE | 10 |
| OSCILLATOR | 10 |
| REFERENCE VOLTAGE (2.5V) | 10 |
| OPERATING VOLTAGE MONITOR | 10 |
| THERMAL SHUTDOWN | 10 |
| Absolute Maximum Ratings | 11 |
| Operating Ratings (<i>Note 1, Note 2</i>) | 11 |
| Thermal Properties | 11 |
| General Electrical Characteristics | 11 |
| Linear Li-Ion Battery Charger with Single Input | 13 |
| CHARGER FUNCTION | 13 |
| END-OF-CHARGE (EOC) FUNCTION | 13 |
| EOC & BATTERY DEFAULT SETTING | 13 |
| HIGH-CURRENT MODE | 13 |
| Buck Converters | 15 |
| CIRCUIT OPERATION | 15 |
| PWM OPERATION | 15 |
| PFM OPERATION | 15 |
| INTERNAL SYNCHRONOUS RECTIFICATION | 16 |
| CURRENT LIMITING | 16 |
| SOFT-START | 16 |
| LOW-DROPOUT OPERATION | 16 |
| LDO's | 18 |
| A/D Converter | 21 |
| A/D CONVERTER DATA AND CONTROL REGISTERS | 21 |
| MEASUREMENT RESULT CALCULATION | 21 |
| WORKING RANGE AND ACCURACY | 21 |
| S&H | 21 |
| Real-Time Clock | 22 |
| RTC UNLOCK FUNCTION | 22 |
| Backup Battery Charger | 23 |
| 32.768 kHz Crystal Oscillator | 23 |
| Comparators | 23 |
| 3 Current Sinks | 25 |
| SINK DRIVERS | 25 |
| I ² C-Compatible Serial Bus Interface | 26 |
| INTERFACE BUS OVERVIEW | 26 |
| DATA TRANSACTIONS | 26 |
| START AND STOP | 26 |
| ACKNOWLEDGE CYCLE | 26 |
| Physical Dimensions | 27 |

General Typical Application Diagram

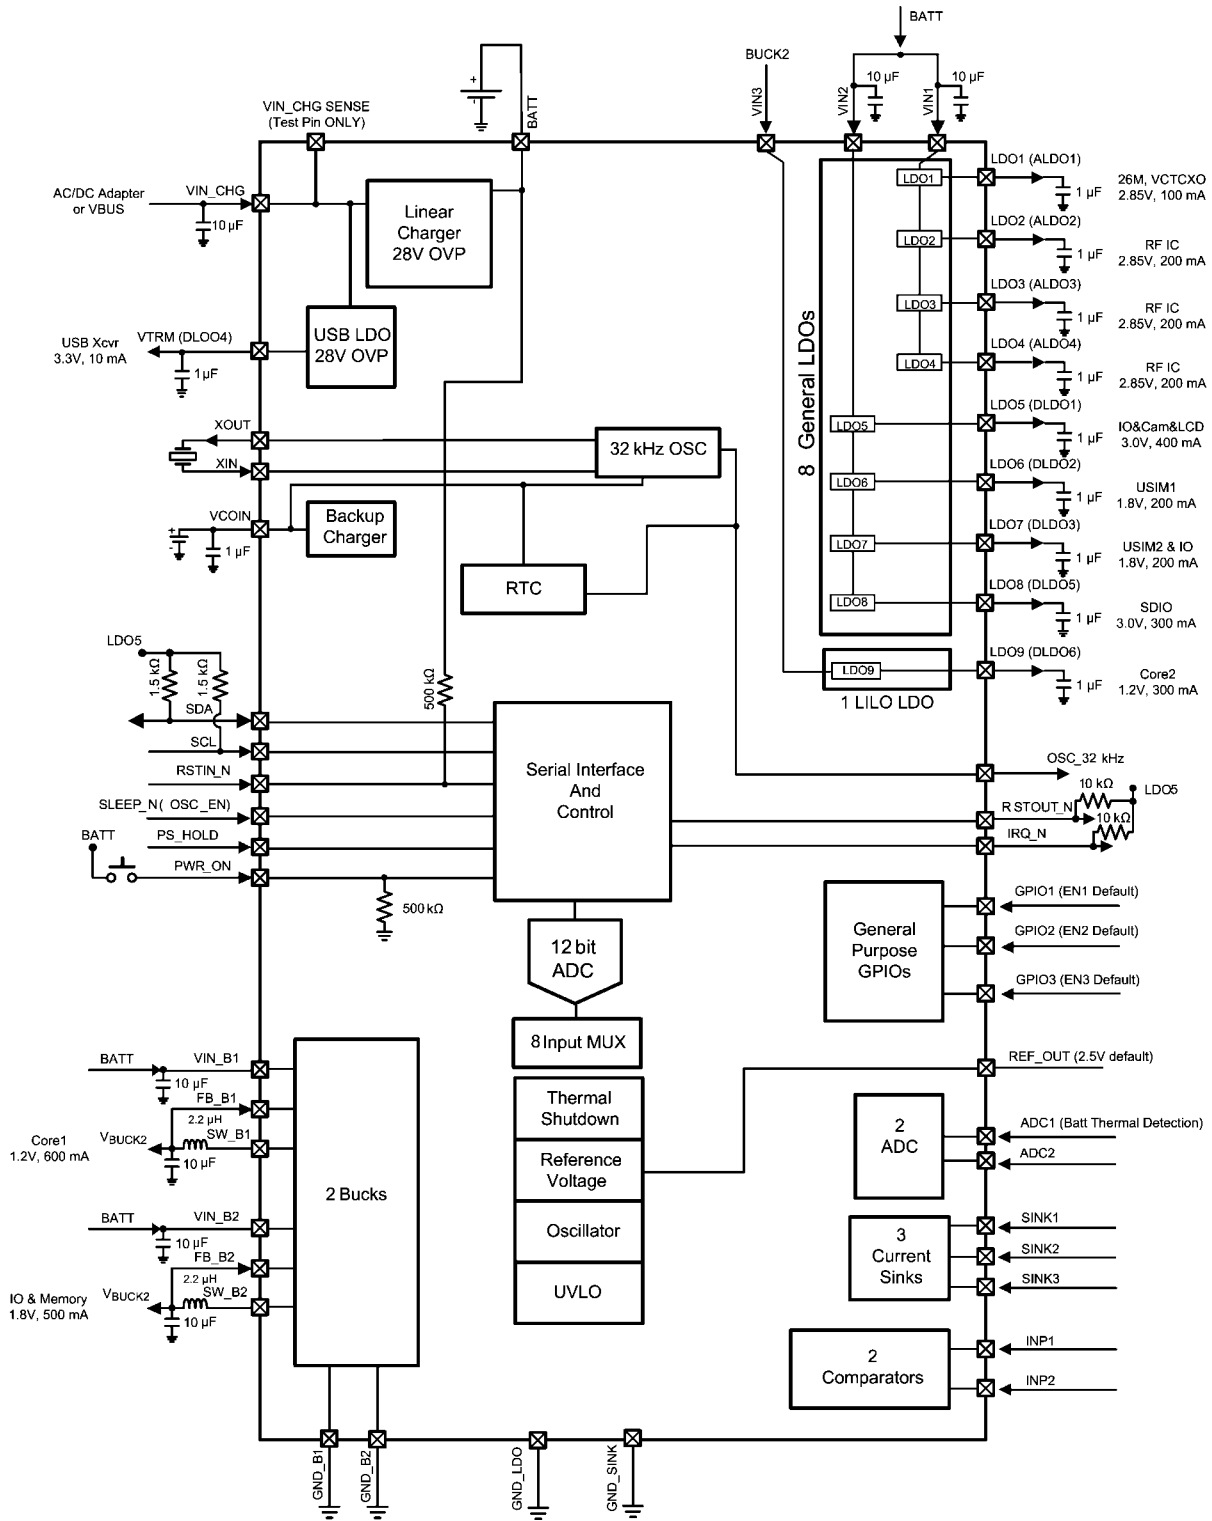

30162001


Device Pin Diagram

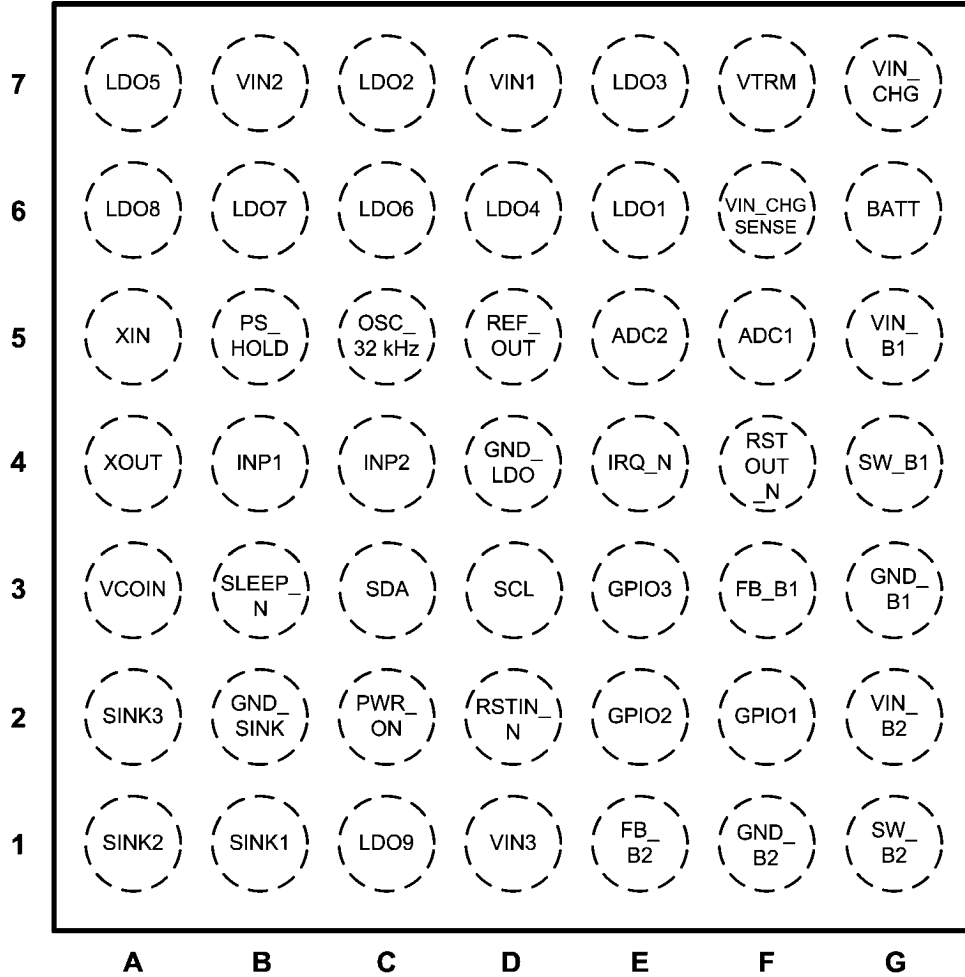

TOP VIEW
49-Bump (0.5 mm pitch) micro SMDxt Package

30162002

Package Marking Information



XY = 2 Digit Date Code
TT = 2 Digit Die Run Trace Code
8765 = Product Identification

◇ = Pin A1

30162003

Ordering Information

| Order Number | Package Type | Product ID | Supplied As |
|--------------|--------------|------------|--------------------------|
| LP8765RLE | micro SMD xT | 8765 | 250 Units on Tape & Reel |
| LP8765RLX | | | 1000 Units onTape & Reel |

LP8765 Pin Descriptions

| Pin # | Name | Type | Description |
|-------|---------------|------|---|
| F5 | ADC1 | A | ADC input for Battery thermal NTC thermal monitor, also used for battery detection. |
| E5 | ADC2 | A | Reserved Pin for external ADC usage |
| G6 | BATT | P | Main Battery connection |
| F3 | FB_B1 | A | Buck1 feedback |
| E1 | FB_B2 | A | Buck2 feedback |
| G3 | GND_B1 | G | Buck1 GND |
| F1 | GND_B2 | G | Buck1 GND |
| D4 | GND_LDO | G | LDOs GND |
| B2 | GND_SINK | G | SINKs GND |
| F2 | GPIO1 | DI | Used for Enable1 |
| E2 | GPIO2 | DI | Used for Enable2 |
| E3 | GPIO3 | DI | Used for Enable3 |
| B4 | INP1 | DI | Comparator Input1 |
| C4 | INP2 | DI | Comparator Input1 |
| E4 | IRQ_N | DO | Interrupt output, active low (Open Drain) |
| E6 | LDO1 | A | LDO1 output |
| C7 | LDO2 | A | LDO2 output |
| E7 | LDO3 | A | LDO3 output |
| D6 | LDO4 | A | LDO4 output |
| A7 | LDO5 | A | LDO5 output |
| C6 | LDO6 | A | LDO6 output |
| B6 | LDO7 | A | LDO7 output |
| A6 | LDO8 | A | LDO8 output |
| C1 | LDO9 | A | LDO9 output |
| C5 | OSC_32KHz | A | 32 KHz clock buffer output to BB |
| B5 | PS_HOLD | DI | Control input from BB |
| C2 | PWR_ON | DI | Power switch on input |
| D5 | REF_OUT | A | 2.5V reference output for ADC (load current should be less than 1mA) |
| D2 | RSTIN_N | DI | Reset input, active low |
| F4 | RSTOUT_N | DO | Reset output, active low (Open Drain) |
| D3 | SCL | DI | Serial interface clock input, external pull up 1.5K to LDO5 |
| C3 | SDA | DI/O | Serial interface bi-directional data, external pull up 1.5K to LDO5 |
| B1 | SINK1 | A | Current Sink1 Input |
| A1 | SINK2 | A | Current Sink2 Input |
| A2 | SINK3 | A | Current Sink3 Input |
| B3 | SLEEP_N | DI | Sleep Mode input, active low |
| G4 | SW_B1 | A | Buck1 switch node |
| G1 | SW_B2 | A | Buck2 switch node |
| A3 | VCOIN | A | Backup battery connection |
| G5 | VIN_B1 | A | Buck1 input |
| G2 | VIN_B2 | A | Buck2 input |
| G7 | VIN_CHG | P | DC power input to charger block (AC adaptor or USB) |
| F6 | VIN_CHG SENSE | DO | VIN_CHG pin testing point (test purpose only) and leave this pin floating. |
| D7 | VIN1 | A | LDOs Input1 |
| B7 | VIN2 | A | LDOs Input2 |
| D1 | VIN3 | A | LDOs Input3 |
| F7 | VTRM | A | 3.3V LDO output for USB transceiver |

| Pin # | Name | Type | Description |
|-------|------|------|---------------------------------|
| A5 | XIN | A | External crystal oscillator IN |
| A4 | XOUT | A | External crystal oscillator OUT |

| | | | | | |
|-------|--------------------------|----|-------------|----|-----------|
| A: | Analog Pin | D: | Digital Pin | I: | Input Pin |
| DI/O: | Digital Input/Output Pin | O: | Output Pin | P: | Power Pin |
| G: | Ground | | | | |

Device Operation Description

OPERATION MODES

POWER-ON-RESET: In POWER-ON RESET mode all internal registers are reset to the default values.

STANDBY: In STANDBY mode all PMU functions are disabled except BB charger, 32 KHz OSC & RTC.

START UP: Startup sequence is triggered by setting Power-on-Switch (PWR_ON) high for 100 ms or connecting a suitable voltage to charger input (VIN_CHG). For RTC ALARM events the startup sequence begins after 2ms delay from the RTC events. During the startup sequence, the 2.5V reference voltage will be powered by either charger block or battery first in order to detect battery existing. If there is a battery and the battery voltage is over OPVM, then the default on regulators (Buck1, Buck2 & LDO5) will be enabled according to a pre-programmed timing pattern. If the regulators are enabled, RSTOUT_N is released, allowing the processor to start up. PS_HOLD must be set high within a programmed timer* (8s max) from the start of STARTUP state; this is true for all startup events except PWR_ON. For PWR_ON startup, PMU stays in POWER ON state when PWR_ON is held high, and the PS_HOLD must be set high before the PWR_ON goes low or Power-on-Switch is released. Otherwise, PMU will go to SHUTDOWN state.

If there is no main battery detected (voltage at ADC1 pin is about 2.4V), PMU will not start the startup sequence. In other modes, the PMU will not enable the charger. If the main battery is removed when PMU is running, then Charger will be disabled immediately to force UVLO shutdown.

If two-pin battery is used then ADC1 pin should be connect to GND through a resistor or floating in order to start up the PMU normally. However, there will be no battery exiting detection.

IDLE: PMU will enter into IDLE mode (normal operating mode) after PS_HOLD signal is asserted by the host processor. IDLE mode will enable all PMU functions that can be controlled by the Serial Interface or direct control inputs. PS_HOLD going low for 10 ms, VDD voltage below UVLO, Chip temperature over TSDH, or a flag failure in a monitored regulator (LDO5) for 10 ms will initiate a SHUTDOWN Sequence.

SLEEP: When BB pulls SLEEP_N pin LOW, the PMU will not do anything except setting BUCKs and LDOs to low-power mode in order to minimize quiescent current if LDOs_LOW_PWR_IN_SLEEP and BUCKs_LOW_PWR_IN_SLEEP bits are set to 1, otherwise both BUCKs and LDOs will stay in normally mode. However, in low-power mode, the summary of total load current of BUCKs or LDOs should stay below 5mA. Buck1 has two preset voltages (BUCK1 NORMAL & BUCK1 SLEEP); BUCK1 output equals BUCK1 SLEEP when SLEEP_N pin is low, and goes back to BUCK1 NORMAL when SLEEP_N is high. By default, BUCK1 SLEEP & NORMAL are same 1.2V. In this mode, only LDO1, LDO2, LDO3, LDO4 and LDO9 can be enabled/disabled through GPIO pins (EN1,2&3). If I²C communication is disabled during sleep, then for other power regulators, BB need to turn them off through I²C before SLEEP_N goes to 0. Otherwise, these power regulators will stay on during BB sleep. The condition of going to SHUTDOWN state is the same as in IDLE state. Please see Register Maps for detail.

SHUTDOWN: In this state, RSTOUT_N is pulled low, and all regulators are disabled according to pre-programmed timing pattern (opposite of STARTUP sequence). After this, all registers are reset to default values except address xxxx, then PMU will go to STANDBY state.

SYSTEM RESET: PMU goes to SYSTEM RESET mode if RSTIN_N input has been pulled low for xxms**. There are two different reset methods:

1. Cold reset (EN_RSTIN_SHUTDOWN = high); PMU will go to SHUTDOWN state first and then initiate STARTUP event automatically. PS_HOLD must be high within programmed PS_HOLD timer, otherwise PMU will go to SHUTDOWN state.


a. Enable shutdown and enter EPROM READ + PREPARE mode, active the pulldown (Total time = 33 ms);

b. Disable the pulldown and enter STARTUP mode;

c. Wait 100 ms; and

d. Enter Normal working mode.

2. Hot reset (EN_RSTIN_SHUTDOWN = low); PMU will pull low RSTOUT_N and disable all the power regulators except BUCK1, BUCK2, LDO5(DLDO1), REF_OUT. A STARTUP event then initiates automatically, and PS_HOLD must be high within programmed PS_HOLD timer, otherwise PMU will go to SHUTDOWN state.

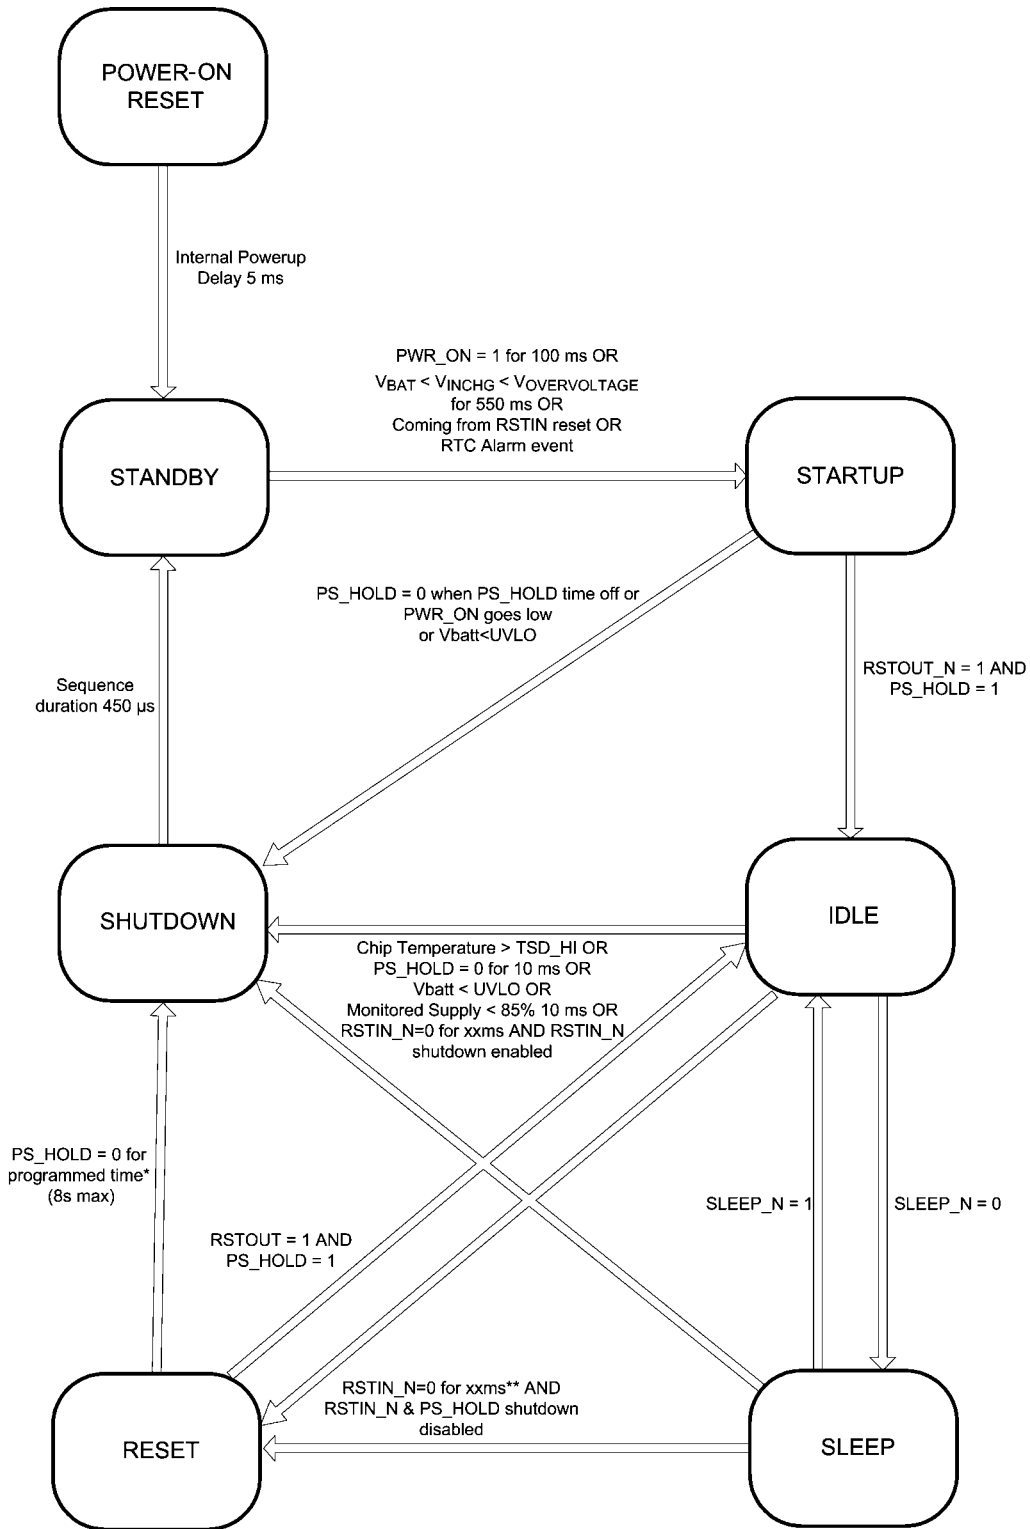


30162004

* Note 1: PS_HOLD timer is programmable 1.5s, 2s, 4s, and 8s.

** Note 2: RSTIN_N timer is programmable 0.5 ms, 1.0 ms, 2.0 ms 33 ms.

POWER-ON AND POWER-OFF SEQUENCES

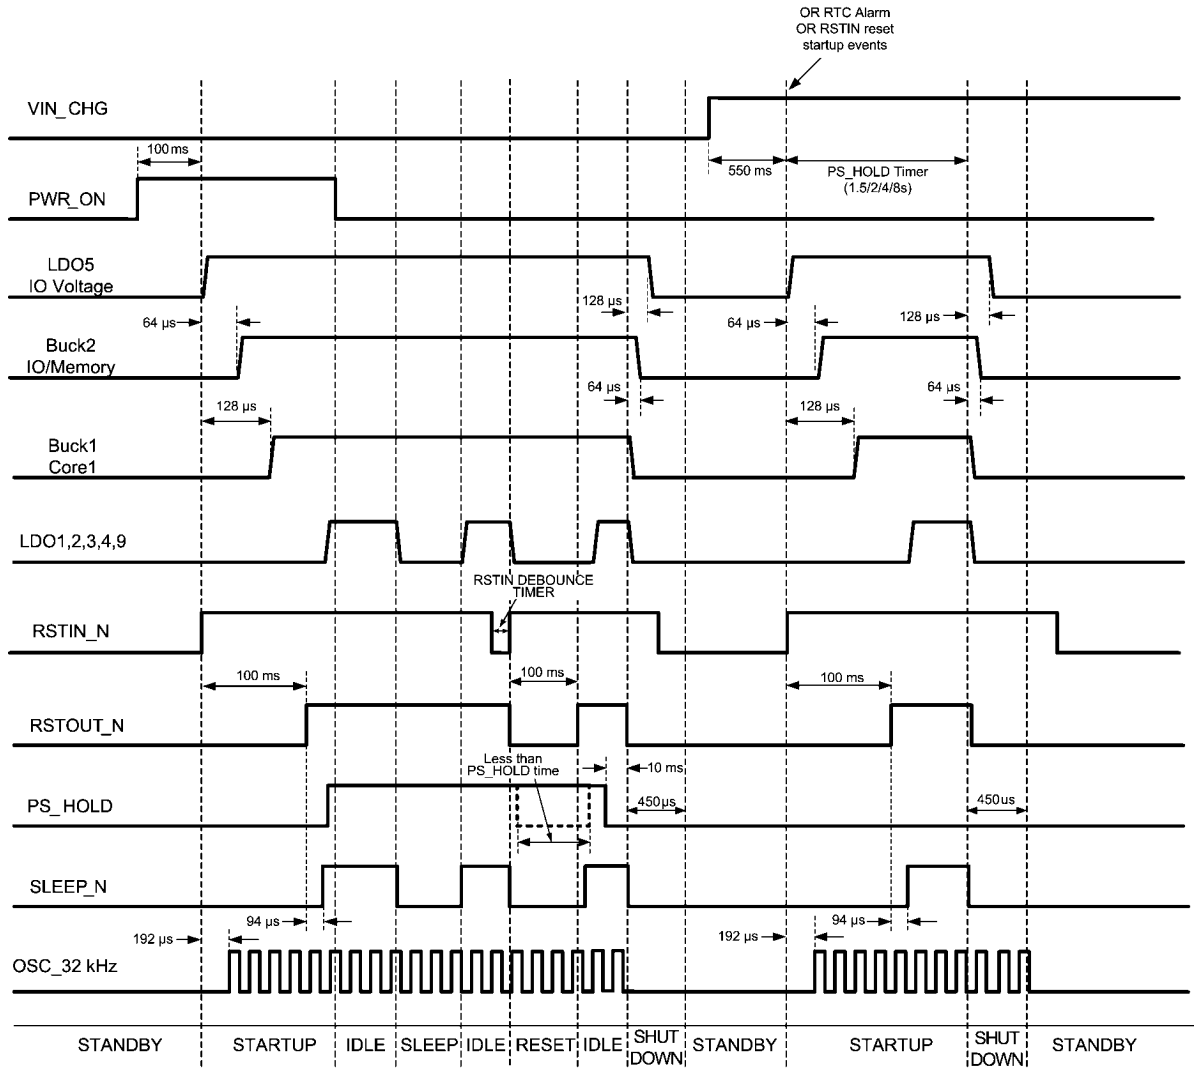

30162005

Default on power rail startup sequence: 2.5V reference voltage → LDO5 → Buck2 → Buck1.

Power-Off sequence is in reverse order of startup sequences.

LP8765 POWER REGULATOR SPEC TABLE

| Outputs | Loads | Voltage Range (V) | Default Voltage (V) | Current Rating [mA] | Default ON (Y/N) | Turn-on Sequence | Voltage Steps (mV) | ON/OFF Control |
|--------------|-----------------|-------------------|---------------------|---------------------|------------------|---|--------------------|---------------------|
| BUCK1 | Core1 | 0.8 - 1.45 | 1.2 | 600 | Y | T0+128 μ s | 50 | S/I(always on) |
| BUCK2 | IO&Memory | 0.8 - 2.1 | 1.8 | 500 | Y | T0+64 μ s | 50 | S/I(always on) |
| LDO1 (ALDO1) | 26M, VCTCXO | 1.5 - 3.0 | 2.85 | 100 | N | - | 50 | S/I AND GPIO1 (EN1) |
| LDO2 (ALDO2) | RF IC | 1.5 - 3.0 | 2.85 | 200 | N | - | 50 | S/I AND GPIO1 (EN1) |
| LDO3 (ALDO3) | RF IC | 1.5 - 3.0 | 2.85 | 200 | N | - | 50 | S/I OR GPIO1 (EN1) |
| LDO4 (ALDO4) | RF IC | 1.85 - 3.4 | 2.85 | 200 | N | - | 50 | S/I AND GPIO2 (EN2) |
| LDO5 (DLDO1) | IO&Cam&LCD | 1.5 - 3.3 | 3 | 400 | Y | T0 | 100 | S/I(always on) |
| LDO6 (DLDO2) | USIM1 | 1.8 or 3.0 | 1.8 | 200 | N | - | - | S/I |
| LDO7 (DLDO3) | USIM2&IO | 1.5 - 3.3 | 1.8 | 200 | N | - | 100 | S/I |
| VTRM (DLDO4) | USB Xcvr | 3.3 fixed | 3.3 | 10 | Y | Always as long as the USB/Adaptor plugged | - | S/I |
| LDO8 (DLDO5) | SDIO | 1.5 - 3.3 | 3 | 300 | N | - | 100 | S/I |
| LDO9 (DLDO6) | Core2 | 0.8 - 1.5 | 1.2 | 300 | - | - | 50 | S/I AND GPIO3 (EN3) |
| REF_OUT | ADC Ref_Voltage | 2.5 | 2.5 | 1 | Y | Always | - | S/I(always on) |

Support Functions

REFERENCE

LP8765 has an internal reference block creating all necessary references and biasing for all blocks.

OSCILLATOR

There is an internal oscillator giving clock to the bucks and to logic control (2MHz typ.).

REFERENCE VOLTAGE (2.5V)

| Parameter | Typ. | Min. | Max. | Load (typ.) |
|-----------|------|---------|--------|-------------|
| REF_OUT | 2.5V | 2.425 V | 2.575V | 100 μ A |

OPERATING VOLTAGE MONITOR

There is Operating Voltage Monitor (OPVM) that checks VDD-pin voltage before starting Power-On sequence. OPVM is also checked during Power-On sequence. If the VDD voltage is less than OPVM threshold LP8765 will not power on. After LP8765 successfully passed Power-On sequence OPVM is not monitored.

| Parameter | Typ. | Min. | Max. | Unit |
|----------------|------|------|------|------|
| OPVM threshold | 3.1 | 3.0 | 3.25 | V |

THERMAL SHUTDOWN

The Thermal Shutdown (TSD) function monitors the chip temperature to protect the chip from temperature damage caused, e.g. by excessive power dissipation. The temperature monitoring function has two threshold values that result in protective actions. When a lower threshold of +125°C is exceeded, the TSDL bit in the Register 0x08 will be set and an “early warning” interrupt, unless masked, is generated to the processor. A read operation on the TSDL bit will reset it if the temperature has decreased to lower than 10°C below the threshold. If the temperature exceeds a higher threshold value of +160°C, the TSDH bit in the Register 0x08 is set, and the chip will automatically go to the Power-Off sequence. A read operation on the TSDH bit will reset it. Power On can be activated only if the junction temperature is less than the early warning lower threshold +115°C.

| Parameter | Typ. | Unit |
|----------------------------|------|------|
| Higher Threshold*) | 160 | °C |
| Early Warning*) | 125 | |
| Early Warning Hysteresis*) | 10 | |

*) Guaranteed by design.

Absolute Maximum Ratings (Note 1, Note 2)

2)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

| | |
|--|---|
| VIN_CHG, VIN_CHG SENSE | -0.3V to +28V |
| V _{BATT} , VIN1, VIN2, VIN_B1, VIN_B2 | -0.3V to +6V |
| VIN3 | -0.3 to +4.5V |
| VCOIN | -0.3V to +4V |
| SINK1&2 | -0.3V to V _{BATT} +0.5V and < 6V |
| SINK3 | -0.3V to 10V |
| All other input-only pins | -0.3V to V _{BATT} +0.3V, max 6V |
| Junction Temperature (T _{J-MAX}) | 150°C |
| Storage Temperature | -40 to 150°C |
| Maximum Continuous Power Dissipation | (Note 3) |
| P _{D-MAX} | |
| ESD (Note 4) | |
| VIN_CHG, BATT, GND, ADC1&2, PWR_ON, RSTIN_N | 8 kV HBM |
| All other | 2 kV HBM |

Operating Ratings (Note 1, Note 2)

| | |
|---|---------------------------|
| VIN_CHG <small>(Note 10)</small> | 4.5V to 6.8V |
| BATT | 3.0V to 5.5V |
| VCOIN | 2.0V to 3.6V |
| VIN1, VIN2, ViN_B1, VIN_B2 | 2.5V to V _{BATT} |
| VIN3 | 0.7V to 4.5V |
| All input-output pins | 0V to V _{BATT} |
| Junction Temperature (T _J) Range | -40°C to +125°C |
| Ambient Temperature (T _A) | -40°C to +85°C |
| Maximum Power Dissipation <small>(Note 5)</small> | 1.4W |

Thermal Properties

| | |
|---|----------|
| <small>(Note 9)</small> | |
| Junction-to-Ambient Thermal Resistance (θ _{JA}) | 38.6°C/W |
| <small>(Jedec Standard Thermal PCB)</small> | |

General Electrical Characteristics

CURRENT CONSUMPTION

Unless otherwise noted, V_{BATT} (=V_{VIN1}=V_{VIN2}=V_{VIN3}=V_{VIN_B1}=V_{VIN_B2})=3.7V, GND (=GND_B1=GND_B2=GND_LDO=GND_SINK)=0V, C_{VIN_CHG}=C_{VIN_B1}=C_{VIN_B2}=C_{BUCK1}=C_{BUCK2}=C_{VIN1}=C_{VIN2}=10 μF, C_{LDOx}=C_{VTRM}=C_{COIN}=1μF. Typical values and limits appearing in normal type apply for T_J=25°C. Limits appearing in **boldface** type apply over the entire junction temperature range for operation, T_J= -40°C to +125°C. **(Note 6)**

| Symbol | Parameter | Conditions | Typ | Limit | | Units |
|-------------------------|--|--|-----|-------|-----|-------|
| | | | | Min | Max | |
| I _{Q(STANDBY)} | Battery Standby Current | COIN on, no load | 35 | | | μA |
| | | COIN off, no load | 4 | | | |
| I _{Q(SLEEP)} | Battery Current in SLEEP Mode @ 0 load | SLEEP_EN=LOW (Buck1, Buck2, LDO5, COIN & REF_OUT on) | 165 | | | |

LOGIC AND CONTROL

Unless otherwise noted, V_{BATT} (=V_{VIN1}=V_{VIN2}=V_{VIN3}=V_{VIN_B1}=V_{VIN_B2})=3.7V, GND (=GND_B1=GND_B2=GND_LDO=GND_SINK)=0V, C_{VIN_CHG}=C_{VIN_B1}=C_{VIN_B2}=C_{BUCK1}=C_{BUCK2}=C_{VIN1}=C_{VIN2}=10 μF, C_{LDOx}=C_{VTRM}=C_{COIN}=1μF. Typical values and limits appearing in normal type apply for T_J=25°C. Limits appearing in **boldface** type apply over the entire junction temperature range for operation, T_J= -40°C to +125°C. **(Note 7)**

| Symbol | Parameter | Conditions | Typ | Limit | | Units |
|---------------------------------|------------------|------------|-----|------------|-------------|-------|
| | | | | Min | Max | |
| Logic and Control Inputs | | | | | | |
| V _{IL} | Input Low Level | PWR_ON | | | 0.9 | V |
| V _{IH} | Input High Level | | | 1.5 | | |
| V _{IL} | Input Low Level | GPIO1-3 | | | 0.4 | V |
| V _{IH} | Input High Level | | | 1.3 | | |
| V _{IL} | Input Low Level | SDA,SCL | | | 0.35 | V |
| V _{IH} | Input High Level | | | 1.3 | | |

| Symbol | Parameter | Conditions | Typ | Limit | | Units |
|----------------------------------|--------------------|---|-----|----------------|----------------|-----------|
| | | | | Min | Max | |
| V_{IL} | Input Low Level | SLEEP_N, PS_HOLD, RSTIN_N | | | 0.2* VLDO5 | V |
| V_{IH} | Input High Level | | | 0.7* VLDO5 | | V |
| I_{LEAK} | Input Current | SDA, SCL, SLEEP_N, PS_HOLD, GPIO1-3 $0V < V_{IN} < V_{BATT}$ | | -5 | +5 | μA |
| R_{IN} | Input Resistance | RSTIN_N, PWR_ON | 500 | | | $k\Omega$ |
| Logic and Control Outputs | | | | | | |
| V_{OL} | Output Low Level | SDA, IRQ_N, RESTOUT_N, $I_{OL} = 2mA$ (Note 7) | | | 0.15* VLDO5 | V |
| V_{OH} | Output High Level | SDA $I_{OH} = 2mA$ (Note 7) | | 0.75* VLDO5 | | V |
| I_{OH} | Open Drain Leakage | IRQ_N, RSTOUT_N, $V_{OH} = V_{LDO5} = 3V$ | | | 1 | μA |

Note 1: Absolute Maximum Ratings indicate limits beyond which damage to the component may occur. Operating Ratings are conditions under which operation of the device is guaranteed. Operating Ratings do not imply guaranteed performance limits. For guaranteed performance limits and associated test conditions, see the Electrical Characteristics tables.

Note 2: All voltages are with respect to the potential at the GND pin.

Note 3: Internal thermal shutdown circuitry protects the device from permanent damage. .

Note 4: The Human body model is a 100 pF capacitor discharged through a 1.5 k Ω resistor into each pin. The machine model is a 200 pF capacitor discharged directly into each pin. MIL-STD-883 3015.7

Note 5: Care must be exercised where high power dissipation is likely. The maximum ambient temperature may have to be derated. Maximum ambient temperature (T_{A-MAX}) is dependent on the maximum operating junction temperature ($T_{J-MAX-OP}$), the maximum power dissipation of the device in the application (P_{D-MAX}), and the junction to ambient thermal resistance of the package in the application (θ_{JA}). This relationship is given by the following equation: $T_{A-MAX} = T_{J-MAX-OP} - (\theta_{JA} \times P_{D-MAX})$.

Note 6: All limits are guaranteed. All electrical characteristics having room-temperature limits are tested during production with $T_J = 25^\circ C$. All hot and cold limits are guaranteed by correlating the electrical characteristics to process and temperature variations and applying statistical process control.

Note 7: Guaranteed by design.

Note 8: Dropout voltage is the input-to-output voltage difference at which the output voltage is 100 mV below its nominal value. This specification does not apply in cases it implies operation with an input voltage below the 2.5V minimum appearing under Operating Ratings. For example, this specification does not apply for devices having 1.5V outputs because the specification would imply operation with an input voltage at or about 1.5V.

Note 9: Junction-to-ambient thermal resistance is highly application and board-layout dependent. In applications where high maximum power dissipation exists, special care must be paid to thermal dissipation issues in board design

Note 10: Full charging current is guaranteed for CHG_IN = 4.5 to 6.8V, but particularly at higher input voltages. Increased power dissipation may cause the thermal regulation to limit the current to a safe level, resulting in longer charging time.

Note 11: Buck output voltage accuracy depends on the accuracy of the external feedback resistors. Resistor values should be chosen for the divider network to ensure that at the desired output voltage the FB pin is at the specified value of VOUT. See Buck Converter Application Information.

Linear Li-Ion Battery Charger with Single Input

LP8765 has a built-in Li-Ion/Li-Poly battery management system. Its main features are:

- Single input - AC adapter or USB
- CC/CV linear charging
- Selectable battery regulation voltage
- Flexible charging cycle control
- Wide array of charging current
- Safety timer


CHARGER FUNCTION

After detecting stable voltage on input (Put 10 μ F 35V rated capacitor at input), charger enters pre-charge mode. In this mode battery is charged with pre-charge current until battery voltage reaches full-rate threshold. Now full charging current

is applied to the battery, until termination voltage is reached. After that, charger enters constant voltage mode, where constant battery voltage is maintained.

END-OF-CHARGE (EOC) FUNCTION

This function ends the charging cycle if charger has reached constant voltage mode. It has automatic and manual control possibilities. Automatic EOC is enabled if AUTOMATIC START/STOP bit is set to 1, otherwise manual control is used. Automatic EOC measures charging current and compares it to selected EOC current level. If charging current drops below EOC current threshold, then charging cycle is ended. It is also possible to set EOC time delay. This is the duration for which charging current must be below EOC level before charging ends. For manual EOC write '1' to STOP CHARGING in register 0x39 to stop charging, and write '1' to START CHARGING in register 0x39 to start charging again. These two bits are WRITE ONLY, and only one bit can be set to '1' at a time.

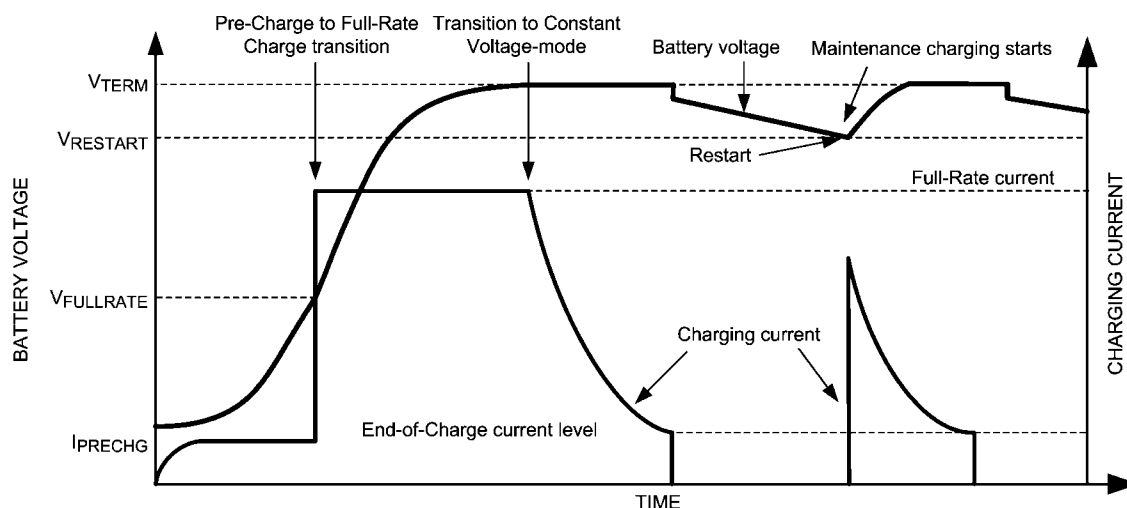

30162006

EOC & BATTERY DEFAULT SETTING

By default the EOC and Battery Detection Function will be disabled/masked off (2 EOC bits = 00) in order to support factory testing or software downloading without the main battery. In a normal customer usage, the BB processor should enable the EOC and Battery detection through the I²C after the system startup.

HIGH-CURRENT MODE

The high-current mode should be used only during factory test, and there are few limitations since it is an add-on feature after the LP8765 was defined.

Once the high-current mode is enabled by programming the 2 MSB of ICHARGE to 11, three charger functions will be disabled:

1. Charger current limit
2. Battery voltage OVP (4.9V)
3. Charger Thermal regulation (115°C)

This high-current mode is not guaranteed to operate normally if the load is too high or with fast dynamic changes due to the following limitations:

1. There is only one bump assigned for VBATT, so the maximum DC load is 1.5A.
2. The charger output will vary when load step is applied since there is no main battery connected.

CHARGER ELECTRICAL CHARACTERISTICS

Unless otherwise noted, V_{BATT} ($=V_{VIN1}=V_{VIN2}=V_{VIN3}=V_{VIN_B1}=V_{VIN_B2}$) = 3.7V, GND ($=GND_B1=GND_B2=GND_LDO=GND_SINK$) = 0V, $C_{VIN_CHG}=C_{VIN_B1}=C_{VIN_B2}=C_{BUCK1}=C_{BUCK2}=C_{VIN1}=C_{VIN2}=10\ \mu\text{F}$, $C_{LDOX}=C_{VTRM}=C_{COIN}=1\ \mu\text{F}$. Typical values and limits appearing in normal type apply for $T_j=25^\circ\text{C}$. Limits appearing in **boldface** type apply over the entire junction temperature range for operation, $T_j=-40^\circ\text{C}$ to $+125^\circ\text{C}$. (*Note 6, Note 9*)

| Symbol | Parameter | Conditions | Typ | Limit | | Units |
|------------------|--|--|------|------------|-------------|------------------|
| | | | | Min | Max | |
| V_{CHG_IN} | AC wall adapter input voltage operating range | | | 4.5 | 6.7 | V |
| V_{OK_CHG} | CHG_IN OK Trip Point | V_{CHG_IN} | 150 | | | mV |
| | | V_{CHG_IN} | 40 | | | |
| V_{TERM} | Battery charging termination Voltage | $V_{TERM} = 4.2\text{V}$, $I_{CHG} = 50\ \text{mA}$ V_{TERM} is measured at 10% of the programmed I_{CHG} current | | -0.35 | +0.35 | % |
| | | | | -1 | +1 | |
| I_{CHG} | CHG_IN programmable full-rate charging current | $6.8\text{V} \geq V_{CHG} \geq 4.5\text{V}$ $V_{BATT} < V_{CHG_IN} - V_{OK_CHG}$ $V_{FULL_RATE} < V_{BATT} < V_{TERM}$ (<i>Note 10</i>) | | 50 | 1200 | mA |
| | Full-rate charging current tolerance | $I_{CHG} = 400\ \text{mA}$ | | -10 | +10 | % |
| $I_{PREQUAL}$ | Pre-charging current | $2.2\text{V} < V_{BATT} < V_{FULL_RATE}$ | 50 | 20 | 80 | mA |
| V_{FULL_RATE} | Full-rate qualification threshold | V_{BATT} rising, transition from pre-charging to full-rate charging | 2.8 | 2.7 | 2.9 | V |
| I_{EOC} | End-of-charge current, % of full-rate current | 0.1C option selected | 10 | | | % |
| $V_{RESTART}$ | Restart threshold voltage | From V_{TERM} voltage (4.2V - 100 mV option selected) | -100 | -70 | -130 | mV |
| C_{BATT} | Capacitance on BATT | (<i>Note 7</i>) | | 30 | 1000 | μF |
| T_{REG} | Regulated junction temperature | (<i>Note 7</i>) | 115 | | | $^\circ\text{C}$ |

Buck Converters

The LP8765 contains two high-efficiency step-down DC-DC switching buck converters, capable of delivering a constant voltage from a single Li-Ion battery. Using a voltage mode architecture with synchronous rectification, the LP8765 has the ability to deliver up to 600 mA (Buck1) and 500 mA (Buck2) depending on the input voltage, the output voltage, the ambient temperature, and the inductor chosen.

There are two modes of operation depending on the current required: PWM and PFM. PWM mode handles current loads of approximately 70 mA or higher, delivering voltage precision of $\pm 3\%$ with up to 90% efficiency or better. Lighter output current loads cause the device to automatically switch into PFM for reduced current consumption ($I_Q = 16 \mu\text{A typ.}$) and a longer battery life. User can force the buck converters to PWM mode by setting FORCE PWM BUCKx bit in Control Register.

Besides PFM power-saving feature, the buck regulators inside the LP8765 also have low-power operation mode, which has lower current consumption compare to PFM. The low-power mode can be enabled when SLEEP_N pin goes low if control bit BUCKS LOW PWR IN SLEEP = 1. However, the total load capability of bucks will be limited to 5mA when they operate at low-power mode. The buck regulators inside the LP8765 can operate up to a 100% duty cycle (PFET switch always on) for low-dropout control of the output voltage. In this way the output voltage will be controlled down to the lowest possible input voltage.

CIRCUIT OPERATION

During the first portion of each switching cycle, the control block in the buck regulator turns on the internal PFET switch. This allows current to flow from the input through the inductor to the output filter capacitor and load. The inductor limits the current to a ramp with a slope of $(V_{IN} - V_{OUT})/L$ by storing energy in a magnetic field. During the second portion of each cycle, the controller turns the PFET switch off, blocking current flow from the input, and then turns the NFET synchronous rectifier on. The inductor draws current from ground through the NFET to the output filter capacitor and load, which ramps the inductor current down with a slope of $-V_{OUT}/L$. The output filter stores charge when the inductor current is high, and releases it when low, smoothing the voltage across the load.

Modulating the PFET switch-on time to control the average current sent to the load regulates the output voltage. The effect is identical to sending a duty-cycle modulated rectangular wave formed by the switch and synchronous rectifier at the SW pin to a low-pass filter formed by the inductor and output filter capacitor. The output voltage is equal to the average voltage at the SW pin.

PWM OPERATION

During PWM operation the converter operates as a voltage-mode controller with input voltage feed forward. This allows the converter to achieve good load and line regulation. The DC gain of the power stage is proportional to the input voltage. To eliminate this dependence, feed forward inversely proportional to the input voltage, is introduced.

While in PWM mode, the output voltage is regulated by switching at a constant frequency and then modulating the energy per cycle to control power to the load. At the beginning of each clock cycle the PFET switch is turned on and the inductor current ramps up until the comparator trips and the control logic turns off the switch. The current limit comparator can also turn off the switch in case the current limit of the PFET is exceeded. In this case the NFET switch is turned on and the inductor current ramps down. The next cycle is initi-

ated by the clock turning off the NFET and turning on the PFET.

PFM OPERATION

At very light loads, the converter enters PFM mode and operates with reduced switching frequency and supply current to maintain high efficiency. The part will automatically transition into PFM mode when either of two conditions occurs for a duration of 32 or more clock cycles:

1. The inductor current becomes discontinuous; or
2. The peak PFET switch current drops below the I_{MODE} level.

Typically,

$$I_{MODE} < 30 \text{ mA} + \frac{V_{IN}}{42\Omega}$$

During PFM operation, the converter positions the output voltage slightly higher than the nominal output voltage during PWM operation, allowing additional headroom for voltage drop during a load transient from light to heavy load. The PFM comparators sense the output voltage via the feedback pin and control the switching of the output FETs such that the output voltage ramps between $\sim 0.6\%$ and $\sim 1.7\%$ above the nominal PWM output voltage. If the output voltage is below the 'high' PFM comparator threshold, the PFET switch is turned on. It remains on until the output voltage exceeds the 'high' PFM threshold or the peak current exceeds the I_{PFM} level set for PFM mode.

The typical peak current in PFM mode is:

$$I_{PFM} = 112 \text{ mA} + \frac{V_{IN}}{27\Omega}$$


Once the PFET switch is turned off, the NFET switch is turned on until the inductor current ramps to zero. When the NFET zero-current condition is detected, the NFET switch is turned off. If the output voltage is below the 'high' PFM comparator threshold (see figure below), the PFET switch is again turned on, and the cycle is repeated until the output reaches the desired level. Once the output reaches the 'high' PFM threshold, the NFET switch is turned on briefly to ramp the inductor current to zero; then both output switches are turned off, and the part enters an extremely low-power mode which allows the part to achieve high efficiencies under extremely light load conditions. When the output drops below the 'low' PFM threshold, the cycle repeats to restore the output voltage (average voltage in PFM mode) to $\sim 1.15\%$ above the nominal PWM output voltage.

If the load current should increase during PFM mode (see below figure) causing the output voltage to fall below the 'low2' PFM threshold, the part will automatically transition into fixed-frequency PWM mode.

| V_{IN} | PWM to PFM (Typ.) | PFM to PWM (Typ.) |
|----------|-------------------|-------------------|
| 3.6V | 50 mA | 100 mA |
| 4.5 | 65 mA | 115 mA |

FORCE PWM BUCK1 and FORCE PWM BUCK2 bits in Serial Interface control registers determine whether the buck converter chooses PFM/PWM operating mode automatically or operates constantly in PWM mode.

| Forced PWM BUCKx | PFM/ PWM Mode |
|------------------|-------------------|
| 0 | Auto mode PFM/PWM |
| 1 | Forced PWM mode |

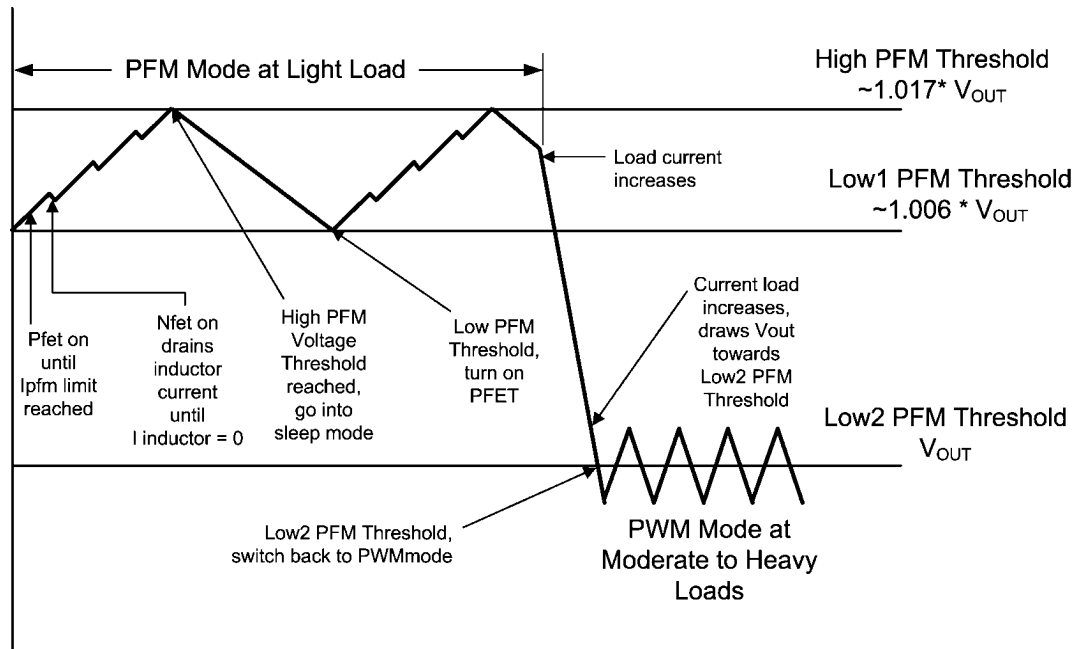

30162007

INTERNAL SYNCHRONOUS RECTIFICATION

While in PWM mode, the converter uses an internal NFET as a synchronous rectifier to reduce rectifier forward voltage drop and associated power loss. Synchronous rectification provides a significant improvement in efficiency whenever the output voltage is relatively low compared to the voltage drop across an ordinary rectifier diode.

CURRENT LIMITING

A current limit feature allows the circuit to protect itself and external components during overload conditions. PWM mode implements cycle-by-cycle current limiting using an internal comparator that trips at 1000 mA (typ.) for Buck1 and Buck2. If the output is shorted to ground the device enters a timed current limit mode where the NFET is turned on for a longer duration until the inductor current falls below a low threshold. This ensures the inductor current has more time to decay, thereby preventing runaway.

SOFT-START

The LP8765 buck regulators have a soft start circuit which limits in-rush current during startup.

LOW-DROPOUT OPERATION

The buck converter can operate at 100% duty cycle (no switching, PFET switch completely on) for low-dropout support of the output voltage. In this way the output voltage will be controlled down to the lowest possible input voltage. The minimum input voltage needed to support the output voltage is:

- $V_{IN,MIN} = I_{LOAD} * (R_{DSON(P)} + R_{INDUCTOR}) + V_{OUT}$
- I_{LOAD} : I_{LOAD} current
- $R_{DSON(P)}$: PFET drain-source resistance in the triode region
- $R_{INDUCTOR}$: Inductor resistance

BUCK ELECTRICAL CHARACTERISTICS

Unless otherwise noted, $V_{BATT} (=V_{VIN1}=V_{VIN2}=V_{VIN3}=V_{VIN_B1}=V_{VIN_B2}) = 3.7V$, $GND (=GND_B1=GND_B2=GND_LDO=GND_SINK) = 0V$, $C_{VIN_CHG}=C_{VIN_B1}=C_{VIN_B2}=C_{BUCK1}=C_{BUCK2}=C_{VIN1}=C_{VIN2}=10\ \mu F$, $C_{LDOX}=C_{VTRM}=C_{COIN}=1\ \mu F$. Typical values and limits appearing in normal type apply for $T_J=25^\circ C$. Limits appearing in **boldface** type apply over the entire junction temperature range for operation, $T_J = -40^\circ C$ to $+125^\circ C$. (*Note 6, Note 11*)

| Symbol | Parameter | Conditions | Typ. | Limit | | Units |
|----------------|--|---|------------|--------------|--------------|------------|
| | | | | Min | Max | |
| V_{FB1} | Feedback Voltage (Buck1) | $V_{OUT} = 1.2V$ | 1.2 | 1.164 | 1.236 | V |
| V_{FB2} | Feedback Voltage (Buck1) | $V_{OUT} = 1.8V$ | 1.8 | 1.746 | 1.854 | |
| $V_{OUT,PFM}$ | Output voltage regulation in PFM mode relative to regulation in PWM mode | (<i>Note 7</i>) | 1.5 | | | % |
| V_{OUT} | Line regulation (<i>Note 7</i>) | $3.0V \leq V_{IN} \leq 5.5V$ $I_{OUT} = 10\ mA$ | 0.14 | | | %/V |
| V_{OUT} | Load regulation (<i>Note 7</i>) | $100\ mA \leq I_{OUT} \leq 300\ mA$ | 0.09 | | | %/mA |
| I_{LIM_PWM} | Switch peak current limit | PWM mode @ 600 mA $3.0V \leq V_{IN} \leq 4.2V$ (Buck1) | 1025 | 710 | 1500 | mA |
| | | PWM mode @ 500 mA $3.0V \leq V_{IN} \leq 4.2V$ (Buck2) | 925 | 630 | 1400 | |
| $R_{DSON(P)}$ | P channel FET on resistance | $V_{IN} = 3.6V, I_{OUT} = 100\ mA$ | 300 | | | m Ω |
| $R_{DSON(N)}$ | N channel FET on resistance | | 150 | | | |
| f_{OSC} | Internal Oscillator Frequency | PWM mode | 2 | 1.9 | 2.1 | MHz |
| η | Efficiency | $I_{OUT} = 5\ mA$, PFM mode $V_{OUT} = 1.35V$ (<i>Note 7</i>) | 88 | | | % |
| | | $I_{OUT} = 300\ mA$, PWM mode $V_{OUT} = 1.35V$ (<i>Note 7</i>) | 90 | | | |
| T_{STUP} | Startup time | $I_{OUT} = 0$ $V_{OUT_BUCK1} = 1.2V$ $V_{OUT_BUCK2} = 1.8V$ (<i>Note 7</i>) | 120 140 | | | μs |

Output Voltage Programming

| BUCK# | Function | I (mA) | Output Voltage (V) | Startup Default | Enable Control |
|-------|-----------|--------|-----------------------|-----------------|----------------|
| Buck1 | CORE1 | 600 | 0.8-1.45 (50 mV step) | ON | S/I |
| Buck2 | IO&Memory | 500 | 0.8-1.45 (50 mV step) | ON | S/I |

BUCK1 has two pre-programmed voltages BUCK1 NORMAL & BUCK1 SLEEP at 0x1C.

DVS FUNCTION FOR BUCK1

| SLEEP_N | |
|---------|--------------------------------|
| High | Buck1 V_{OUT} = BUCK1 NORMAL |
| Low | Buck1 V_{OUT} = BUCK1 SLEEP |

NOTE: If user does not want this DVS function, just program BUCK1 SLEEP = BUCK1 NORMAL = 1.2V.

LDO's

There are all together 10 LDO's in LP8765 grouped as:

- A-type LDO's (LDO's 1-4)
- D-type LDO's (LDO's 5-8)
- LILO LDO (LDO 9)
- USB LDO (LDO 10)

The A-type LDO's are optimized for supplying of analog loads and have ultra-low noise (10 μ VRMS) and excellent PSRR (75 dB) performance.

The D-type LDO's are optimized for good dynamic performance to supply different fast changing (digital) loads with still reasonable noise (30 μ VRMS) and PSRR (60 dB) performance.

The LILO LDO (LDO9) is powered by the output of BUCK2 in order to get better efficiency.

The USB LDO (VTRM) is a high-voltage LDO that uses VIN_CHG as supply; it has 28V OVP capability.

All LDO's can be programmed through serial interface for different output voltage values.

A-TYPE LDO ELECTRICAL CHARACTERISTICS

Unless otherwise noted, $V_{BATT} (=V_{VIN1}=V_{VIN2}=V_{VIN3}=V_{VIN_B1}=V_{VIN_B2})=3.7V$, $GND (=GND_B1=GND_B2=GND_LDO=GND_SINK)=0V$, $C_{VIN_CHG}=C_{VIN_B1}=C_{VIN_B2}=C_{BUCK1}=C_{BUCK2}=C_{VIN1}=C_{VIN2}=10\ \mu F$, $C_{LDOX}=C_{VTRM}=C_{COIN}=1\ \mu F$. Typical values and limits appearing in normal type apply for $T_J=25^\circ C$. Limits appearing in **boldface** type apply over the entire junction temperature range for operation, $T_J=-40^\circ C$ to $+125^\circ C$. (*Note 6*)

| Symbol | Parameter | Condition | LDO# | Typ. | Limits | | Units |
|------------------|---|---|-------|------|------------|------------|---------------|
| | | | | | Min | Max | |
| V_{OUT} | Output Voltage Accuracy | $I_{OUT} = 1mA$, $V_{OUT} = \text{default}$ | 1-4 | | -2 -3 | +2 +3 | % |
| I_{SLEEP} | Max output current in sleep mode (TXCO_EN = 0) | $V_{OUT} + 0.5V \leq V_{IN} \leq 5.5V$ (<i>Note 7</i>) | 2 | | | 1 | mA |
| I_{SC} | Output current limit | $V_{OUT} = 0V$ | 1 | 230 | 100 | | mA |
| | | | 2,3,4 | 395 | 200 | | |
| V_{DO} | Dropout Voltage | $V_{OUT} = 2.85V$, $I_{OUT} = I_{MAX}$ (<i>Note 8</i>) | | 90 | | 150 | mV |
| ΔV_{OUT} | Line Regulation | $V_{OUT} + 0.5V \leq V_{IN} \leq 5.5V$, $I_{OUT} = 1mA$ | 1-4 | 25 | | | mV |
| | Load Regulation | $1mA \leq I_{OUT} \leq 450mA$ | | 0.3 | | | |
| e_N | Output noise voltage | 10 Hz $\leq f \leq$ 100 kHz $C_{OUT} = 1\ \mu F$ (<i>Note 7</i>) | 1-4 | 10 | | | μV_{RMS} |
| PSRR | Power Supply Ripple Rejection Ratio | f=10 kHz, $C_{OUT} = 1\ \mu F$ $I_{OUT} = 20mA$ (<i>Note 7</i>) | 1-4 | 75 | | | dB |
| $t_{STARTUP}$ | Startup Time from Shutdown | $C_{OUT} = 1\ \mu F$, $I_{OUT} = I_{MAX}$, GPIO to $0.95 \cdot V_{OUT}$ (<i>Note 7</i>) | 1-4 | 35 | | | μs |
| $V_{TRANSIENT}$ | Startup Transient Overshoot | $C_{OUT} = 1\ \mu F$, $I_{OUT} = I_{MAX}$ | 1-4 | | | 30 | mV |
| C_{OUT} | External output capacitance for stability | | 1-4 | 1.0 | 0.5 | 20 | μF |

D-TYPE LDO ELECTRICAL CHARACTERISTICS

Unless otherwise noted, $V_{BATT} (=V_{VIN1}=V_{VIN2}=V_{VIN3}=V_{VIN_B1}=V_{VIN_B2})=3.7V$, $GND (=GND_B1=GND_B2=GND_LDO=GND_SINK)=0V$, $C_{VIN_CHG}=C_{VIN_B1}=C_{VIN_B2}=C_{BUCK1}=C_{BUCK2}=C_{VIN1}=C_{VIN2}=10\ \mu F$, $C_{LDOX}=C_{VTRM}=C_{COIN}=1\ \mu F$. Typical values and limits appearing in normal type apply for $T_J=25^\circ C$. Limits appearing in **boldface** type apply over the entire junction temperature range for operation, $T_J=-40^\circ C$ to $+125^\circ C$. (*Note 6*)

| Symbol | Parameter | Condition | LDO# | Typ. | Limits | | Units |
|-------------|---|--|------|------|------------|----------|-------|
| | | | | | Min | Max | |
| V_{OUT} | Output Voltage Accuracy | $I_{OUT} = 1mA$, $V_{OUT} = \text{default}$ | 5-8 | | -2 -3 | +2 +3 | % |
| I_{SLEEP} | Max output current in sleep mode (TXCO_EN = 0) | $V_{OUT} + 0.5V \leq V_{IN} \leq 5.5V$ | 5-6 | | | 1 | mA |
| I_{SC} | Output current limit | $V_{OUT} = 0V$ | 5 | 680 | 400 | | mA |
| | | | 6,7 | 380 | 200 | | |
| | | | 8 | 540 | 300 | | |

| Symbol | Parameter | Condition | LDO# | Typ. | Limits | | Units |
|----------------------------|---|---|------|------|------------|------------|-------------------|
| | | | | | Min | Max | |
| V _{DO} | Dropout Voltage | V _{OUT} = 3V, I _{OUT} = I _{MAX} (Note 8) | 5 | 175 | | 280 | mV |
| | | | 6,7 | 90 | | 150 | |
| | | | 8 | 135 | | 225 | |
| ΔV _{OUT} | Line Regulation | V _{OUT} + 0.5V ≤ V _{IN} ≤ 5.5V, I _{OUT} = 1 mA | 5-8 | 30 | | | mV |
| | Load Regulation | 1 mA ≤ I _{OUT} ≤ 450 mA | | 2 | | | |
| e _N | Output noise voltage | 10 Hz ≤ f ≤ 100 kHz C _{OUT} = 1μF (Note 7) | 5-8 | 35 | | | μV _{RMS} |
| PSRR | Power Supply Ripple Rejection Ratio | f=10 kHz, C _{OUT} = 1μF I _{OUT} = 20 mA (Note 7) | 1-4 | 65 | | | dB |
| t _{STARTUP} | Startup Time from Shutdown | C _{OUT} = 1μF, I _{OUT} = I _{MAX} , GPIO2 to 0.95*V _{OUT} (Note 7) | 5-8 | 35 | | | μs |
| V _{TRANSIEN} T | Startup Transient Overshoot | C _{OUT} = 1μF, I _{OUT} = I _{MAX} (Note 7) | 5-8 | | | 30 | mV |
| C _{OUT} | External output capacitance for stability | | 5-8 | 1.0 | 0.5 | 20 | μF |

LDO9 (LILO) ELECTRICAL CHARACTERISTICS

Limits in standard typeface are for T_A = 25°C. Limits in **boldface** type apply over the operating ambient temperature range -40°C ≤ T_A ≤ +125°C). Unless otherwise noted, specifications apply to the closed loop typical application circuit with V_{IN3} = 3.7V, I_{OUT} = 1mA, C_{OUT} = 1μF, V_{EN} = V_{BATT} (Note 6).

| Symbol | Parameter | Conditions | Typ | Limit | | Units | |
|------------------------------------|---|---|------|------------|------------|-------|--|
| | | | | Min | Max | | |
| V _{OUT} | Output Voltage Tolerance | V _{OUT} = 1.2V at V _{IN3} = 1.8V | | -2 | 2 | % | |
| ΔV _{OUT} /V _{IN} | Line Regulation Error | V _{IN3} = V _{OUT(NOM)} + 0.3V to 1.8V, I _{OUT} = 300 mA | 0.1 | | 1.5 | mV | |
| ΔV _{OUT} /ΔmA | Load Regulation Error | V _{IN3} = 1.8V, I _{OUT} = 1mA to 300 mA | 2 | | 20 | mV | |
| I _{SC} | Output Current (short circuit) | V _{OUT} = 0V, V _{IN3} = 1.8V, I _{OUT} = 1 mA | 595 | 300 | | mA | |
| V _{DO} | Output Voltage Dropout | V _{OUT} = 1.2V, I _{OUT} = 300 mA (Note 8) | 55 | | 110 | mV | |
| | | I _{OUT} = 150 mA (Note 8) | 27.5 | | 60 | mV | |
| EN | Output Noise | 10 Hz to 100 Hz (Note 7) | 100 | | | mVRMS | |
| PSRR | Power Supply Rejection Ration | Sine modulated V _{BATT} (Note 7) | | | | dB | |
| | | f = 10 Hz | 70 | | | | |
| | | f = 100 Hz | 65 | | | | |
| | | f = 1kHz | 45 | | | | |
| | | Sine modulated V _{BATT} (Note 7) | | | | | |
| | | f = 10 Hz | 80 | | | | |
| f = 100 Hz | 90 | | | | | | |
| f = 1kHz | 95 | | | | | | |
| f = 10kHz | 85 | | | | | | |
| f = 100 kHz | 64 | | | | | | |
| I _Q | Quiescent Current into V _{IN3} (Normal mode) | I _{LOAD} = 0 (Note 7) | 11 | | | μA | |
| I _{Q(SHUTDOWN)} | V _{IN3} Shutdown Current | Output disabled (Note 7) | 0.1 | | | μA | |
| ΔV _{OUT} | Line Transient Response (Note 7) | V _{IN3} = V _{OUT(NOM)} + 0.3V to V _{OUT(NOM)} + 0.9V; tr, tf = 10 μs | ±1 | | | mV | |
| | Load Transient Response (Note 7) | Pulsed load 0↔300 mA, di/dt = 300 mA/1μs | ±15 | | | mV | |
| T _{STARTUP} | Startup Time | GPIO3 to 0.95*V _{OUT} (Note 7) | 70 | | 150 | μs | |

USB LDO (VTRM) ELECTRICAL CHARACTERISTICS

Typical values and limits appearing in normal type apply for $T_J = 25^\circ\text{C}$. Limits appearing in **boldface** type apply over the entire junction temperature range for operation, $T_J = -40$ to $+125^\circ\text{C}$. Unless otherwise specified, the following applies for $V_{\text{IN_CHG}} = 5\text{V}$. (*Note 6*)

| Symbol | Parameter | Conditions | Typ | Limit | | Units |
|-------------------------|---|--|-----|-------------|------------|---------------|
| | | | | Min | Max | |
| V_{OUT} | Output Voltage Accuracy | $I_{\text{OUT}} = 1\text{mA}$, | 3.3 | 3.15 | 3.5 | V |
| I_{SC} | Output Current Limit | $V_{\text{OUT}} = 0\text{V}$ | 135 | 10 | | mA |
| ΔV_{OUT} | Line Regulation | $4.5\text{V} \leq V_{\text{IN_CHG}} \leq 6.5\text{V}$ $I_{\text{OUT}} = 10\text{mA}$ | 10 | | | mV |
| ΔV_{OUT} | Load Regulation | $1\text{mA} \leq I_{\text{OUT}} \leq 10\text{mA}$ | 60 | | | |
| PSRR | Power Supply Ripple Rejection Ratio | $f = 10\text{kHz}$, $C_{\text{OUT}} = 1\text{mF}$ $I_{\text{OUT}} = 20\text{mA}$ (<i>Note 7</i>) | 45 | | | dB |
| $t_{\text{START-UP}}$ | Startup Time from Shutdown | $C_{\text{OUT}} = 1\text{mF}$, $I_{\text{OUT}} = 10\text{mA}$ (<i>Note 7</i>) | 15 | | | μs |
| $V_{\text{TRANSIENT}}$ | Startup Transient Overshoot | $C_{\text{OUT}} = 1\text{mF}$, $I_{\text{OUT}} = 10\text{mA}$ (<i>Note 7</i>) | 250 | | | mV |
| C_{OUT} | External output capacitance for stability | | 1 | 0.6 | 20 | μF |

A/D Converter

LP8765 is equipped with a 12-bit successive approximation analog-to-digital converter to enable the conversion of analog inputs:

- Battery voltage
- Charge voltage or current
- IC temperature
- Battery Temperature (external input)

The battery voltage input and the charge current are scaled linearly to adapt the voltage/current range of the source to the input voltage range of the A/D core. The ADC is clocked by the internal 1MHz system clock. The conversion result is available in the registers 0x11 & 0x12 80 μs after the setting

of the CONV_START bit in the ADC Control Register. The ADC will automatically enter power save mode if conversions are not performed.

A/D CONVERTER DATA AND CONTROL REGISTERS

The Read/Write Control register ADC_CTRL allows starting the conversion, source selection and output format selection. Setting the CONV_START bit in the control register starts a new A/D conversion. Setting ADC_FORMAT register to '1' allows throwing out the MSB and shifting the result 1 bit left. This can be used if result's MSB is known, to get more data with one register read. User should wait at least 80 μs between two readings, or check the register bit CONVERSION_DONE=1 at 0x13 bit0 before read ADC data out.

ADC INPUT SELECTION (REGISTER 0x10)

| ADC INPUT SEL | | | ADC Input | Max_Value in Formula | Accuracy |
|---------------|------|------|---------------------|----------------------|--------------------------------|
| bit3 | bit2 | bit1 | | | |
| 0 | 0 | 0 | V _{BATT} | 5.5V | ±2% in operating range |
| 0 | 0 | 1 | V _{IN_CHG} | 6.0V | ±3% in operating range |
| 0 | 1 | 0 | I _{IN_CHG} | 2.5A | TBD |
| 0 | 1 | 1 | T _J | 125°C | See <i>Figure 1</i> |
| 1 | 0 | 0 | V _{BATT} | 6.0V | ±3% in operating range |
| 1 | 0 | 1 | V _{BATT} | 5.0V | ±2% in operating range |
| 1 | 1 | 0 | V _{ADC1} | 2.5V | ±(2%+30 mV) in operating range |
| 1 | 1 | 1 | V _{ADC2} | 2.5V | ±(2%+30 mV) in operating range |

MEASUREMENT RESULT CALCULATION

The transfer functions for conversions can be given as: VALUE = MAX_VALUE*(i+0.5)/4095 where i = 0...4095.

If only 8 most significant bits are read, then: VALUE = MAX_VALUE*(i+0.5)/255 where i = 0...255.

If ADC_FORMAT is set to 1 and 8 bits are read, then: VALUE = MAX_VALUE*(i+0.5)/511 where i = 0...255.

If MSB is assumed 1, then MAX_VALUE/2 must be added to this Value.


WORKING RANGE AND ACCURACY

ADC reading is accurate for VBATT voltages over 2.7V. ADC uses internal bandgap reference. Total absolute accuracy for voltage measurement is better than 3% over all working conditions.

For current measurement the absolute accuracy is better than 5% or 10 mA whatever is bigger.

S&H

Sample in time is 1μs. As result ADC may sample in possible spikes that may occur during phone operation. To filter spikes out ADC code readings averaging can be used.

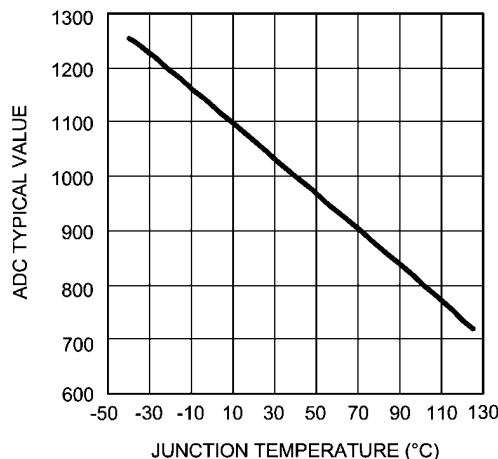

30162052

FIGURE 1. ADC Typical Value vs. Junction Temperature

ADC ELECTRICAL CHARACTERISTICS

Unless otherwise noted, $V_{BATT} (=V_{VIN1}=V_{VIN2}=V_{VIN3}=V_{VIN_B1}=V_{VIN_B2})=3.7V$, $GND (=GND_B1=GND_B2=GND_LDO=GND_SINK)=0V$, $C_{VIN_CHG}=C_{VIN_B1}=C_{VIN_B2}=C_{BUCK1}=C_{BUCK2}=C_{VIN1}=C_{VIN2}=10\ \mu F$, $C_{LDOX}=C_{VTRM}=C_{COIN}=1\ \mu F$. Typical values and limits appearing in normal type apply for $T_J=25^\circ C$. Limits appearing in **boldface** type apply over the entire junction temperature range for operation, $T_J = -40^\circ C$ to $+125^\circ C$. (*Note 6*)

| Symbol | Parameter | Conditions | Typ | Limit | | Units |
|--------|---------------------------|-----------------------------------|-----|-------|-----------|---------|
| | | | | Min | Max | |
| | Resolution | | 12 | | | bits |
| INL | Integral Nonlinearity | (<i>Note 7</i>) | | -4 | 4 | LSB |
| DNL | Differential Nonlinearity | No missing code (<i>Note 7</i>) | | -2 | 2 | |
| | Conversion Time | (<i>Note 7</i>) | | | 80 | μs |

Real-Time Clock

Real-time clock (RTC) block is used for time tracking in any chip condition. It uses 32 kHz crystal oscillator for accurate time predictions and is supplied either from system supply in normal condition or from coin battery when the chip is in shut-down mode.

This RTC has the following features:

- Accurate time counting, with fine-grained correction for inaccuracies caused by environment;
- Calendar for years 2000 - 2099 with leap-year compensation and automatic day-of-week calculation; and
- Two highly customizable alarms.

All RTC data is presented in binary format, with following details:

- Seconds, minutes: codes from 000000 to 111011 represent numbers from 0 to 59;
- Hours: codes from 00000 to 10111 represent numbers from 0 to 23; only 24-hour mode available;
- Days of week: codes from 000 to 110 represent days from Monday to Sunday;
- Days of month: codes from 00000 to 11110 represent days from 1st to 31st; and
- Years: codes from 0000000 to 1100011 represent years from 2000 to 2099.

RTC time and alarm registers are user-writable, except for day-of-week registers, which are calculated automatically and are read-only.

Alarms allow creating periodical or one-time events. The result of an alarm event depends on the PMU state. If PMU is in standby, then alarm causes PMU to start up. If PMU is in working mode, then alarm creates an interrupt.

Alarm event happens if the alarm is activated (ALARM ACTIVATED bit is '1') and current RTC time matches the time in alarm configuration time stored in the register. The smallest alarm selection time unit is 1 minute, and the event always happens on the first second of the minute. To exclude a time unit value from matching check, all alarm configuration bits for this value must be written to '1'. For example, to ignore month number on alarm creation, the ALARM MONTH code must be 1111. Alarm weekday bits must also be configured - alarm event can only happen on selected weekdays. If weekday is not important or not known, then all weekday bits should be set to '1'.

If the user writes some data into RTC alarm registers, then this data is stored inside RTC. This data will stay there as long as RTC has power. Turning off the phone will not remove RTC supply, so the alarms will still work and can trigger a phone power-up.

RTC UNLOCK FUNCTION

If the Battery voltage is lower than 3.4V/3.5V, the RTC level shifts will be disabled when AC adapter or USB cable is plugged in. In order to unlock the RTC date, two control bits in address 0x39, "RTC UNLOCK" & "RTC DATA LATCH" are used by following sequence:

1. Write 04h to address 0x39h
2. Write 08h to address 0x39h

RTC TIME SELECTION TABLE 1
Registers 0x4C...0x51

| | |
|-----------------------|---|
| RTC TIME SECONDS | Current RTC time: seconds (0x00...0x3B) |
| RTC TIME MINUTES | Current RTC time: minutes (0x00...0x3B) |
| RTC RESET SECONDS | Write '1' to reset seconds value to 0 |
| RTC TIME HOURS | Current RTC time: hours (0x00...0x17) |
| RTC TIME DAY OF MONTH | Current RTC time: day of month (0x00...0x1E; 0x00 is the first day of the month) |
| RTC TIME WEEKDAY | Current RTC time: weekday (0x0...0x6; 0x0 - Monday, 0x1 - Tuesday, 0x2 - Wednesday, 0x3 - Thursday, 0x4 - Friday, 0x5 - Saturday, 0x6 - Sunday) |
| RTC TIME MONTH | Current RTC time: month (0x0...0xB; 0x0 - January, 0x1 - February, 0x2 - March, 0x3 - April, 0x4 - May, 0x5 - June, 0x6 - July, 0x7 - August, 0x8 - September, 0x9 - October, 0xA - November, 0xB - December) |
| RTC TIME YEAR | Current RTC time: year (0x00...0x63 - years 2000...2099) |

RTC TIME SELECTION TABLE 2
Registers 0x54...0x62

| | |
|--|---|
| ALARMX MINUTES | Minute setting for alarm; 0x3F to ignore minutes |
| ALARMX HOURS | Hour setting for alarm; 0x1F to ignore hours |
| ALARMX DAY OF MONTH | Day of month setting for alarm; 0x1F to ignore day of month |
| ALARMX MONTH | Month setting for alarm; 0xF to ignore month |
| ALARMX YEAR | Year setting for alarm; 0x7F to ignore year |
| ALARMX MONDAY/ TUESDAY/ WEDNESDAY/ THURSDAY/ FRIDAY/ SATURDAY/SUNDAY | Weekday selection for alarm; write '1' to allow alarm on that day |
| ALARMX ACTIVATED | 0 - Alarm not activated 1 - Alarm activated |

Backup Battery Charger

Backup battery charger (BBC) is intended for charging an external coin cell battery. Its output is connected to the VCOIN pin. It consists of Voltage Limited Current Source with 1k Ω output resistor. By default it is always on.

It is possible to turn backup battery charger off via registers. VCOIN – voltage limit and ICOIN – current source values are also programmable via registers (the possible values are stated in [Backup Battery Charger](#)). BBC has a reverse current protection. VCOIN pin voltage can be measured by an internal ADC.

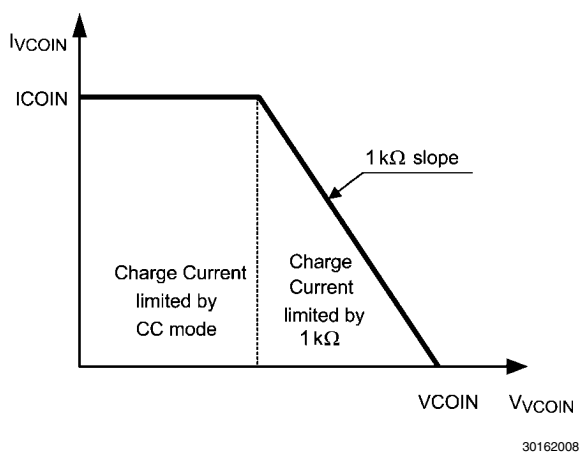


FIGURE 2. BBC IU Characteristic

BACKUP BATTERY CHARGER ELECTRICAL CHARACTERISTICS

Typical values and limits appearing in normal type apply for $T_J = 25^\circ\text{C}$. Limits appearing in **boldface** type apply over the entire junction temperature range for operation, $T_J = -40$ to $+125^\circ\text{C}$. Unless otherwise specified, the following applies for $V_{VIN_CHG} = 5\text{V}$. ([Note 6](#))

| Symbol | Parameter | Conditions | Typ | Limit | | Units |
|-------------|--------------------------|---|-----|-------|------|---------------|
| | | | | Min | Max | |
| VCOIN | Voltage limit | $I_{LOAD} = 1\mu\text{A}$ VCOIN programmed to 3V | 3V | -7% | +7% | V |
| ICOIN | Charging current | VCOIN pin shorted to GND ICOIN programmed to 200 μA | 200 | -20% | +20% | μA |
| R_{VCOIN} | Internal series resistor | | 1.0 | 0.5 | 1.6 | k Ω |
| I_{LEAK} | Reverse leakage current | VRTC pin current = 0 | | | 10 | μA |
| I_{RTC} | COIN input current | $V_{COIN} = 3\text{V}$ | 1.7 | | 5 | μA |

32.768 kHz Crystal Oscillator

There are two options for implementing the 32.768 kHz oscillator:

1. An external crystal that is connected between XIN and XOUT. The external crystal ESR must not exceed 100 k Ω ; if this value is exceeded the circuit may never start oscillating.

2. An external oscillator module could be used by connecting the module output directly into XIN. When using an external oscillator module, the XOUT pin should be unconnected.

Pins XIN and XOUT are not able to drive external load. Oscillator output is buffered to pin OSC_32KHZx.

Comparators

LP8765 contains two general purpose comparators which can be used for detecting external accessories like ear plugs, etc.

COMPARATOR ELECTRICAL CHARACTERISTICS

Unless otherwise noted, $V_{BATT} (=V_{VIN1}=V_{VIN2}=V_{VIN3}=V_{VIN_B1}=V_{VIN_B2}) = 3.7V$, $GND (=GND_B1=GND_B2=GND_LDO=GND_SINK) = 0V$, $C_{VIN_CHG}=C_{VIN_B1}=C_{VIN_B2}=C_{BUCK1}=C_{BUCK2}=C_{VIN1}=C_{VIN2}=10\ \mu F$, $C_{LDOx}=C_{VTRM}=C_{COIN}=1\ \mu F$. Typical values and limits appearing in normal type apply for $T_J=25^\circ C$. Limits appearing in **boldface** type apply over the entire junction temperature range for operation, $T_J= -40^\circ C$ to $+125^\circ C$. (*Note 6*)

| Symbol | Parameter | Conditions | Typ | Limit | | Units |
|-----------------|-------------------------|---|-----|-------|-----|-------|
| | | | | Min | Max | |
| V _{TH} | Input threshold voltage | Default setting | 250 | | | mV |
| | | Programmable threshold voltages | 25 | | | |
| | | | 50 | | | |
| | | | 100 | | | |
| | | | 150 | | | |
| | | | 250 | | | |
| | | | 500 | | | |
| | | | 750 | | | |
| 1000 | | | | | | |
| I _{IL} | Input leakage current | INP1, INP2 $0V \leq V_{INPUT} \leq V_{BATT}$ | | -1 | +1 | |

3 Current Sinks

- SINK1: Powered up to VBATT+0.5V, 100 mA/120 mA Max Current.
- SINK2: Powered up to VBATT+0.5V, 100 mA/120 mA Max Current.
- SINK3: Powered up to 10V, 100 mA/120 mA Max Current.

Recommendation: use either SINK1 or SINK2 to drive DC motor.

CURRENT SINK ELECTRICAL CHARACTERISTICS

Unless otherwise noted, $V_{BATT} (=V_{VIN1}=V_{VIN2}=V_{VIN3}=V_{VIN_B1}=V_{VIN_B2})=3.7V$, $GND (=GND_B1=GND_B2=GND_LDO=GND_SINK)=0V$, $C_{VIN_CHG}=C_{VIN_B1}=C_{VIN_B2}=C_{BUCK1}=C_{BUCK2}=C_{VIN1}=C_{VIN2}=10\ \mu F$, $C_{LDOx}=C_{VTRM}=C_{COIN}=1\ \mu F$. Typical values and limits appearing in normal type apply for $T_J=25^\circ C$. Limits appearing in **boldface** type apply over the entire junction temperature range for operation, $T_J=-40^\circ C$ to $+125^\circ C$. (*Note 6*)

| Symbol | Parameter | Typ | Limit | | Units |
|----------------------|-------------------------------------|------|-------|----------------|-------|
| | | | Min | Max | |
| V_{SINK_MAX} | Voltage tolerance at SINK1+2 pins | | | $V_{BATT}+0.5$ | V |
| | Voltage tolerance at SINK3 pins | | | 10 | |
| I_{OUT} (100 mA) | Sink current range | | 6.25 | 100 | mA |
| I_{OUT} (120 mA) | Sink current range | | 7.5 | 120 | mA |
| I_{OUT} Resolution | Current control resolution | 4 | | | bits |
| I_{OUT} Accuracy | Current accuracy at default current | | -5 | 5 | % |
| PWM Resolution | PWM control resolution | 6 | | | bits |
| V_{SAT} (100 mA) | Saturation voltage at 90 mA* | 310 | | | mV |
| V_{SAT} (120 mA) | Saturation voltage at 108 mA* | 385 | | | mV |
| f_{PWM} | PWM frequency | 20.4 | | | kHz |

* Headroom voltage at SINK pin when current drop to 90% of its nominal value.

SINK DRIVERS

Each driver may be configured for 100 mA or 120 mA current range.

Sink Scale = 0

| SINK IOUT[3:0] | I_{OUT} (mA) |
|----------------|----------------|
| 1111 | 100.00 |
| 1110 | 93.75 |
| 1101 | 87.50 |
| 1100 | 81.25 |
| 1011 | 75.00 |
| 1010 | 68.75 |
| 1001 | 62.50 |
| 1000 | 56.25 |
| 0111 | 50.00 |
| 0110 | 43.75 |
| 0101 | 37.50 |
| 0100 | 31.25 |
| 0011 | 25.00 |
| 0010 | 18.75 |
| 0001 | 12.50 |
| 0000 | 6.25 |

Sink Scale = 0

| SINK IOUT[3:0] | I_{OUT} (mA) |
|----------------|----------------|
| 1111 | 120.00 |
| 1110 | 112.50 |
| 1101 | 105.00 |
| 1100 | 97.50 |
| 1011 | 90.00 |
| 1010 | 82.50 |
| 1001 | 75.00 |
| 1000 | 67.50 |
| 0111 | 60.00 |
| 0110 | 52.50 |
| 0101 | 45.00 |
| 0100 | 37.50 |
| 0011 | 30.00 |
| 0010 | 22.50 |
| 0001 | 15.00 |
| 0000 | 7.50 |

I²C-Compatible Serial Bus Interface

INTERFACE BUS OVERVIEW

The I²C-compatible synchronous serial interface provides access to the programmable functions and registers on the device.

This protocol uses a two-wire interface for bi-directional communications between the ICs connected to the bus. The two interface lines are the Serial Data Line (SDA), and the Serial Clock Line (SCL). These lines should be connected to a positive supply, via a pull-up resistor of 1.5 kΩ and remain HIGH even when the bus is idle.

Every device on the bus is assigned a unique address and acts as either a Master or a Slave depending on whether it generates or receives the SCL.

DATA TRANSACTIONS

One data bit is transferred during each clock pulse. Data is sampled during the high state of the SCL. Consequently, throughout the clock's high period, the data should remain stable. Any changes on the SDA line during the high state of the SCL and in the middle of a transaction, aborts the current transaction. New data should be sent during the low SCL state. This protocol permits a single data line to transfer both command/control information and data using the synchronous serial clock.

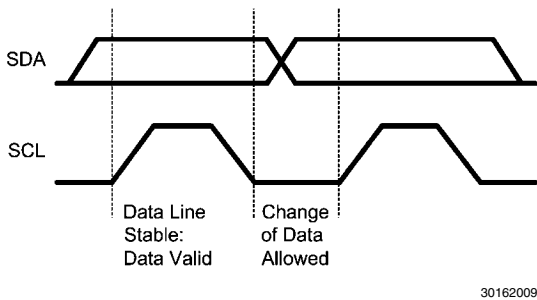


FIGURE 3. Bit Transfer

Each data transaction is composed of a Start Condition, a number of byte transfers (set by the software) and a Stop

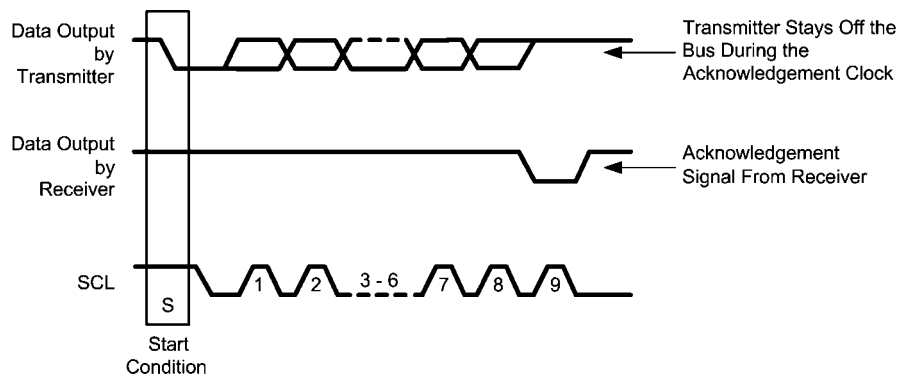


FIGURE 5. Bus Acknowledge Cycle

Condition to terminate the transaction. Every byte written to the SDA bus must be 8 bits long and is transferred with the most significant bit first. After each byte, an Acknowledge signal must follow. The following sections provide further details of this process.

START AND STOP

The Master device on the bus always generates the Start-and-Stop Conditions (control codes). After a Start Condition is generated, the bus is considered busy, and it retains this status until a certain time after a Stop Condition is generated. A high-to-low transition of the data line (SDA) while the clock (SCL) is high indicates a Start Condition. A low-to-high transition of the SDA line while the SCL is high indicates a Stop Condition.

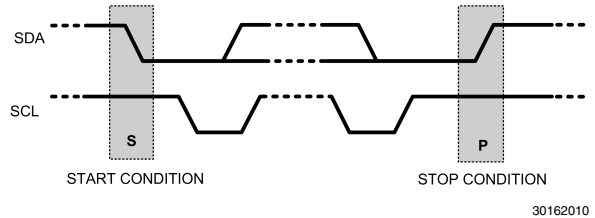



FIGURE 4. Start-and-Stop Conditions

In addition to the first Start Condition, a repeated Start Condition can be generated in the middle of a transaction. This allows another device to be accessed, or a register read cycle.


ACKNOWLEDGE CYCLE

The Acknowledge Cycle consists of two signals: the acknowledge clock pulse the master sends with each byte transferred, and the acknowledge signal sent by the receiving device. The master generates the acknowledge clock pulse on the ninth clock pulse of the byte transfer. The transmitter releases the SDA line (permits it to go high) to allow the receiver to send the acknowledge signal. The receiver must pull down the SDA line during the acknowledge clock pulse and ensure that SDA remains low during the high period of the clock pulse, thus signaling the correct reception of the last data byte and its readiness to receive the next byte.


Physical Dimensions inches (millimeters) unless otherwise noted

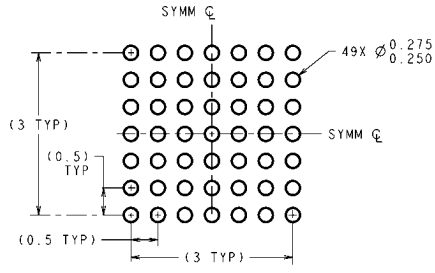

LAND PATTERN RECOMMENDATION

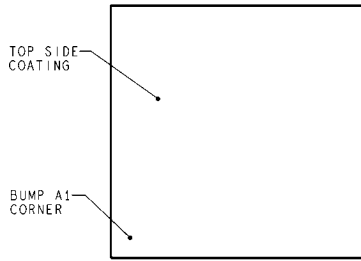

DIMENSIONS ARE IN MILLIMETERS
DIMENSIONS IN () FOR REFERENCE ONLY

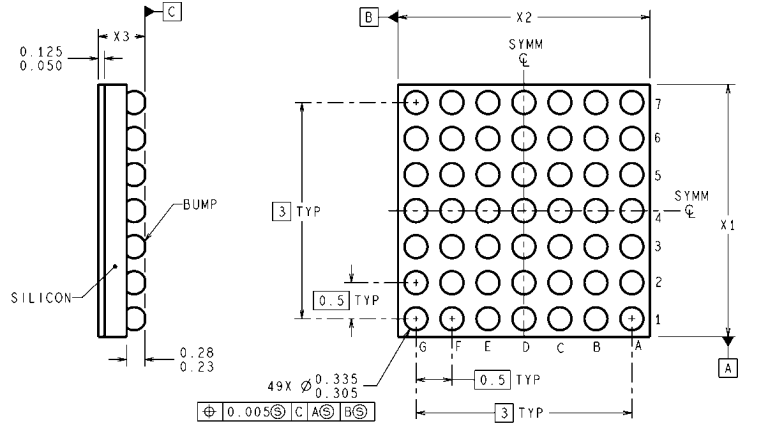

RLA49XXX (Rev B)

25-bump Thin micro SMD Package
NS Package Number RLA49JJA
X1 = 3.669 mm ±0.030 mm
X2 = 3.669 mm ±0.030 mm
X3 = 0.650 mm ±0.075 mm

Notes

For more National Semiconductor product information and proven design tools, visit the following Web sites at:
www.national.com

| Products | | Design Support | |
|--------------------------------|--|------------------------------|--|
| Amplifiers | www.national.com/amplifiers | WEBENCH® Tools | www.national.com/webench |
| Audio | www.national.com/audio | App Notes | www.national.com/appnotes |
| Clock and Timing | www.national.com/timing | Reference Designs | www.national.com/refdesigns |
| Data Converters | www.national.com/adc | Samples | www.national.com/samples |
| Interface | www.national.com/interface | Eval Boards | www.national.com/evalboards |
| LVDS | www.national.com/lvds | Packaging | www.national.com/packaging |
| Power Management | www.national.com/power | Green Compliance | www.national.com/quality/green |
| Switching Regulators | www.national.com/switchers | Distributors | www.national.com/contacts |
| LDOs | www.national.com/ldo | Quality and Reliability | www.national.com/quality |
| LED Lighting | www.national.com/led | Feedback/Support | www.national.com/feedback |
| Voltage References | www.national.com/vref | Design Made Easy | www.national.com/easy |
| PowerWise® Solutions | www.national.com/powerwise | Applications & Markets | www.national.com/solutions |
| Serial Digital Interface (SDI) | www.national.com/sdi | Mil/Aero | www.national.com/milaero |
| Temperature Sensors | www.national.com/tempensors | SolarMagic™ | www.national.com/solarmagic |
| PLL/VCO | www.national.com/wireless | PowerWise® Design University | www.national.com/training |

THE CONTENTS OF THIS DOCUMENT ARE PROVIDED IN CONNECTION WITH NATIONAL SEMICONDUCTOR CORPORATION ("NATIONAL") PRODUCTS. NATIONAL MAKES NO REPRESENTATIONS OR WARRANTIES WITH RESPECT TO THE ACCURACY OR COMPLETENESS OF THE CONTENTS OF THIS PUBLICATION AND RESERVES THE RIGHT TO MAKE CHANGES TO SPECIFICATIONS AND PRODUCT DESCRIPTIONS AT ANY TIME WITHOUT NOTICE. NO LICENSE, WHETHER EXPRESS, IMPLIED, ARISING BY ESTOPPEL OR OTHERWISE, TO ANY INTELLECTUAL PROPERTY RIGHTS IS GRANTED BY THIS DOCUMENT.

TESTING AND OTHER QUALITY CONTROLS ARE USED TO THE EXTENT NATIONAL DEEMS NECESSARY TO SUPPORT NATIONAL'S PRODUCT WARRANTY. EXCEPT WHERE MANDATED BY GOVERNMENT REQUIREMENTS, TESTING OF ALL PARAMETERS OF EACH PRODUCT IS NOT NECESSARILY PERFORMED. NATIONAL ASSUMES NO LIABILITY FOR APPLICATIONS ASSISTANCE OR BUYER PRODUCT DESIGN. BUYERS ARE RESPONSIBLE FOR THEIR PRODUCTS AND APPLICATIONS USING NATIONAL COMPONENTS. PRIOR TO USING OR DISTRIBUTING ANY PRODUCTS THAT INCLUDE NATIONAL COMPONENTS, BUYERS SHOULD PROVIDE ADEQUATE DESIGN, TESTING AND OPERATING SAFEGUARDS.

EXCEPT AS PROVIDED IN NATIONAL'S TERMS AND CONDITIONS OF SALE FOR SUCH PRODUCTS, NATIONAL ASSUMES NO LIABILITY WHATSOEVER, AND NATIONAL DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY RELATING TO THE SALE AND/OR USE OF NATIONAL PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.

LIFE SUPPORT POLICY

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS PRIOR WRITTEN APPROVAL OF THE CHIEF EXECUTIVE OFFICER AND GENERAL COUNSEL OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

Life support devices or systems are devices which (a) are intended for surgical implant into the body, or (b) support or sustain life and whose failure to perform when properly used in accordance with instructions for use provided in the labeling can be reasonably expected to result in a significant injury to the user. A critical component is any component in a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system or to affect its safety or effectiveness.

National Semiconductor and the National Semiconductor logo are registered trademarks of National Semiconductor Corporation. All other brand or product names may be trademarks or registered trademarks of their respective holders.

Copyright© 2011 National Semiconductor Corporation

For the most current product information visit us at www.national.com



National Semiconductor Americas Technical Support Center
 Email: support@nsc.com
 Tel: 1-800-272-9959



National Semiconductor Europe Technical Support Center
 Email: europe.support@nsc.com

National Semiconductor Asia Pacific Technical Support Center
 Email: ap.support@nsc.com




National Semiconductor Japan Technical Support Center
 Email: jpn.feedback@nsc.com

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View LP8765RLE/NOPB on WIN SOURCE](#)
-  [Texas Instruments](#) Information

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management