




**THE DATASHEET OF  
JMGSCD-26MW**



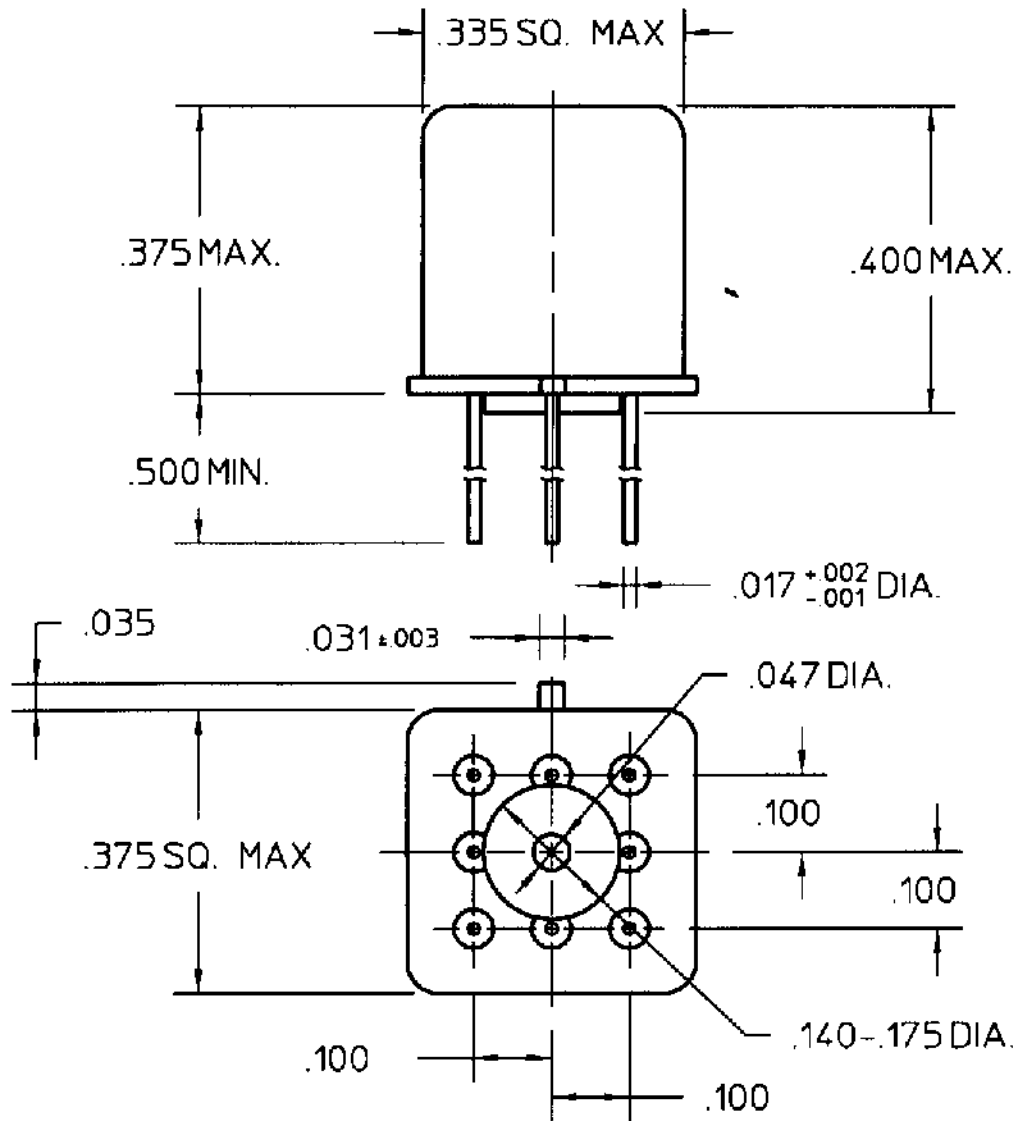


COIL: @ 25°C  
 RESISTANCE 3200 OHMS ± 10%  
 NOMINAL VOLTAGE 26.5 VDC  
 MUST OPERATE 14.0 VDC  
 MUST RELEASE 8.0 VDC MAX, 1.4 VDC MIN.

ENVIRONMENT:  
 VIBRATION 10 CPS TO 3000 CPS @ 30 g's  
 SHOCK 75 g's 6 MS. DURATION  
 TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE TIME 4.0 MS MAX  
RELEASE TIME 7.5 MS MAX  
CONTACT STABILIZATION 2.5 MS MAX

CUSTOMER DATA SHEET



CONTACT RATING: LOW LEVEL TO 1 AMP  
28 VDC RESISTIVE 100,000 OPERATIONS MIN

DR. R.B. 5/9/97 CKERRY 5/9/97

**COMMUNICATIONS  
 INSTRUMENTS, INC.**



CUST. QPL  
 CUST. NO. M39016/42-052M

TYPE JMGSD RELAY


**JMGSCD-26MW**

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View JMGSCD-26MW](#) on WIN SOURCE
-  [TE Connectivity](#) Information

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management