
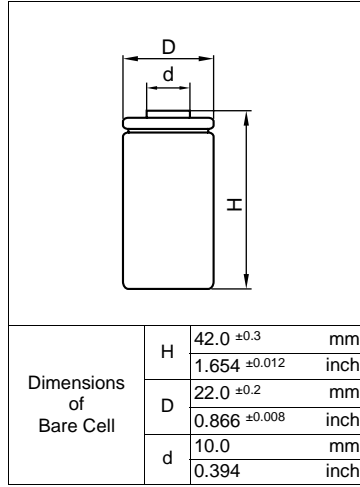


# SANYO

## Cadnica


### Cell Type KR-1800SCE Specifications

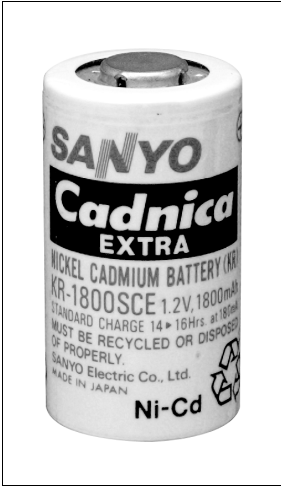


Nominal Capacity		1800mAh	
Nominal Voltage		1.2V	
Charging Current	Standard	180mA	
	Fast	2700mA	
Charging Time	Standard	14 to 16Hrs.	
	Fast	about 1Hr.	
Ambient Temperature	Charge	Standard	0°C to +45°C [+32°F to 113°F]
		Fast	0°C to +45°C [+32°F to 113°F]
	Discharge	-20°C to +60°C [-4°F to 140°F]	
	Storage	-30°C to +50°C [-22°F to 122°F]	
Internal Impedance (Av.) (at 50% discharge)		6.5mΩ (at 1000Hz)	
Weight		49g/1.73oz	
Dimensions(D)×(H) (with tube)		22.9 <sup>0</sup> <sub>-1</sub> × 43.0 <sup>0</sup> <sub>-1.2</sub> mm	
		0.90 <sup>0</sup> <sub>-0.04</sub> × 1.69 <sup>0</sup> <sub>-0.05</sub> inch	

### Typical Characteristics


Charge

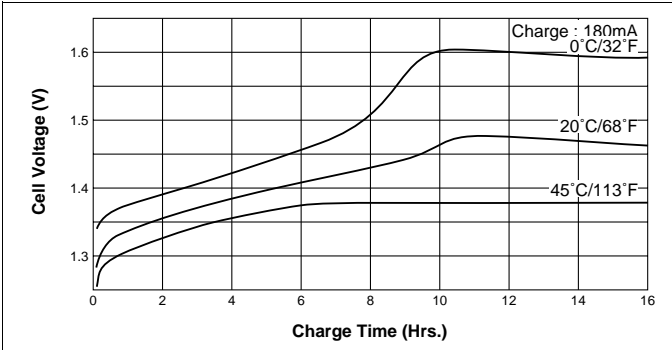


Discharge (at high rate)

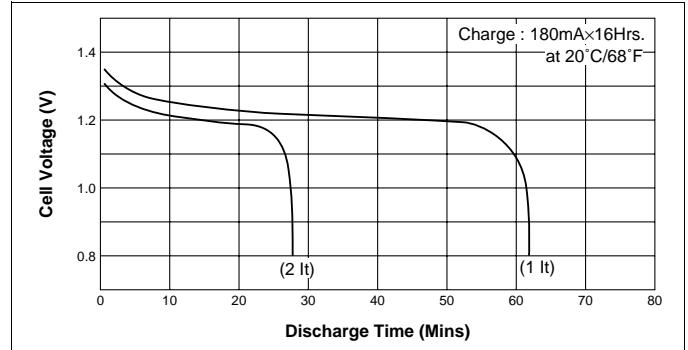


Charge

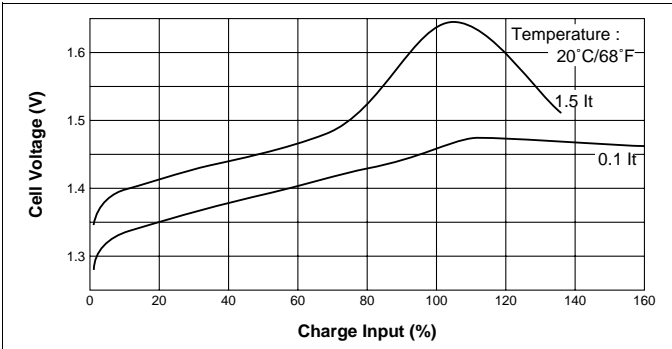


Discharge (at high rate)

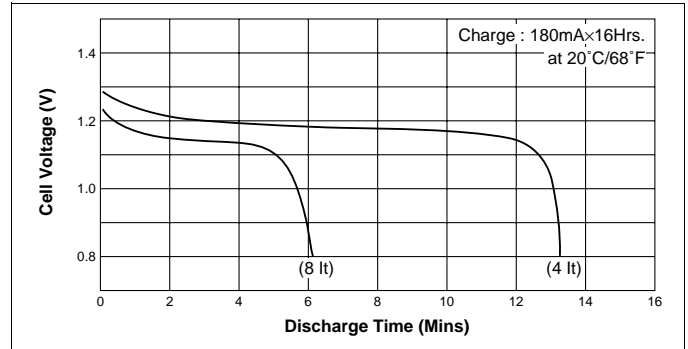

Discharge (at low rate)

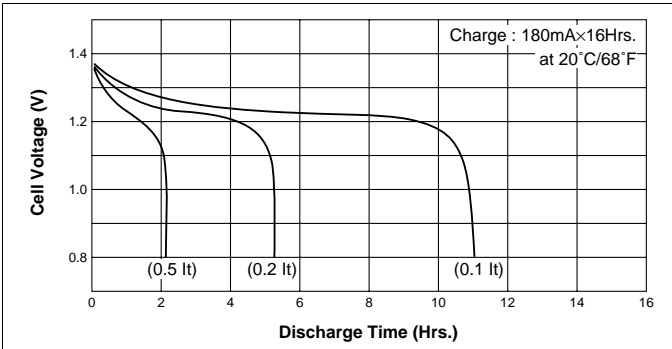

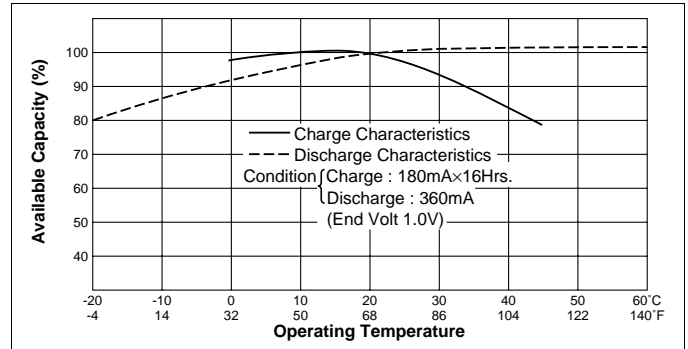

Temperature (Charge & Discharge)



## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View KR1800SCE on WIN SOURCE](#)
-  [Panasonic Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management