



**THE DATASHEET OF
98426-S13-05-237LF**









X-XXXXL
 LEAD FREE AND ROHS COMPATIBLE, NOTE 6
 BODY HEIGHT : XXX
 - MIN = 104 (10.4MM)
 - MAX = 290 (29.0MM)

PACKAGING, NOTE 3
 NO. OF POS PER ROW, 03 TO 25

PIN STYLE	OAL
01	12.8
02	13.5
03	14.1
04	15.6
05	16.3
06	17.1
07	18.3
08	19.1
09	20.3
10	21.1
11	22.3
12	23.3
13	26.0
14	28.0
15	30.0
16	32.0
17	11.0

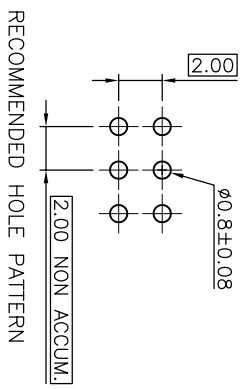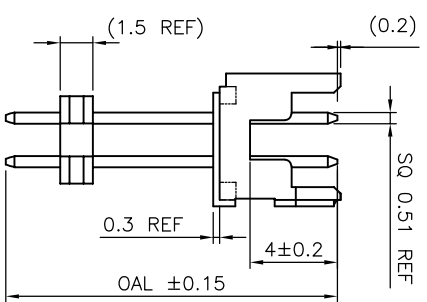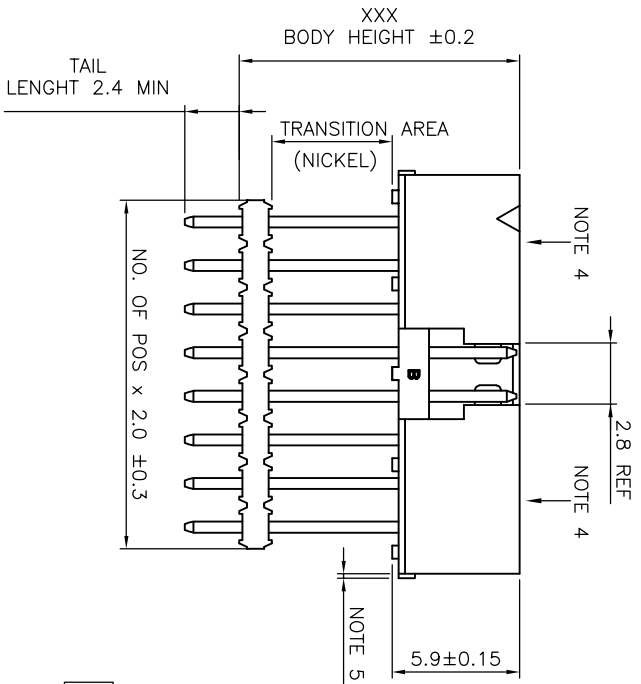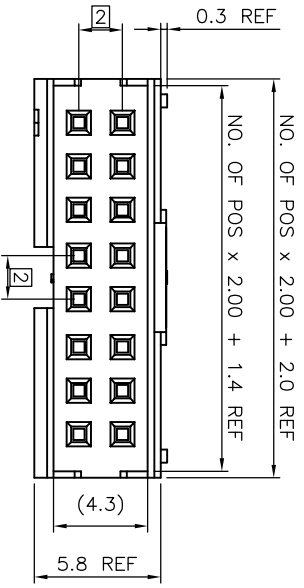

D-FREE, 7µm
 PLASTIC
 PER POSITION
 ATIONS
 BILITY
 ASSURE TO
 TURE FOR
 PLICATION
 BOARD.
 GS-14-920
 14
 BE USED THROUGH REFLOW PROCESS

mat'l. code		surface		tolerance		projection		product family	
ltr	ecn no	dr	date	ISO 1302	ISO 406	ISO	10 ¹	MINITEK	
A	F09-0227	JCO	09.12.07	tolerances unless otherwise specified				SHR STACKING	
B	F10-0067	JCO	10.06.29	linear	XXX	±0.13	mm	HEADER MINITEK	
C	B-18972	LMU	14.10.01		X,XXX	±0.05	scale	1:1	
D	B-19190	LMU	14.10.24	dr	LMULIN	09.04.02		dwg no	
E	B-20291	BVE	15.02.19	engr	J.COMPAIGNON	09.04.02		sheet 1 of 1	
F	F-27987	LMU	17.09.18	chr	JCO	09.12.07		98426	
sheet index	revision			pppd	JCO	09.12.07		CUSTOMER Drawing	
								size	
								A3	

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- [View 98426-S13-05-237LF on WIN SOURCE](#)
- [Amphenol FCI Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management