




**THE DATASHEET OF
ALC10060**




CONFIDENTIAL & PROPRIETARY INFORMATION
 This document contains Confidential and Proprietary Information of Alliance LLC, and all design, manufacturing, reproduction, use, and sale rights of such information are expressly reserved

ALL DIM



6.00 ± .12

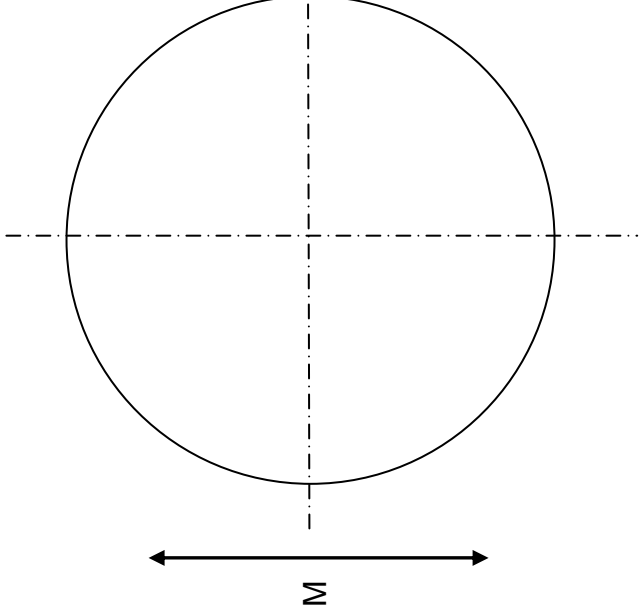

NOTES:

- MAGNET PROPERTIES PER S22:
 Br: 9,500-10,000 G
 Hc: 9,000-9,500 Oe
 Hci: ≥15,000 Oe
 T max: 250 C

- SUPPLIED MAGNETIZED ACROSS THE DIAMETER





TOLERANCES (UNLESS OTHERWISE NOTED)	
DECIMAL	METRIC
X.XX = ± .01	X.X = ± .25
X.XXX = ± .005	X.XX = ± .13
ANGLES ± .5°	
DO NOT SCALE DRAWING	

REV	DESCRIPTION	DATE	BY
B	Changed CAD, incl cert, 3D	2/11/20	BT

1450 CLARK DRIVE, \	DESCRIPTION: 10.0
Alli	Samarium Cobalt M
	GRADE: S22
	COATING: None

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View ALC10060 on WIN SOURCE](#)
-  [Alliance Memory, Inc. Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management