



**THE DATASHEET OF
CDRH60D45BT150NP-101MC**



SMD Power Inductor CDRH60D45B/T150



Description


- Ferrite drum core construction
- Magnetically shielded
- Qualified AEC-Q200
- Operating Temperature: -55°C to +150°C (including self-heating)




Applications

- LED Head light for Automobile
- ECU, DC/DC converter
- Automotive and other high temperature, high reliability application


Dimension [mm]

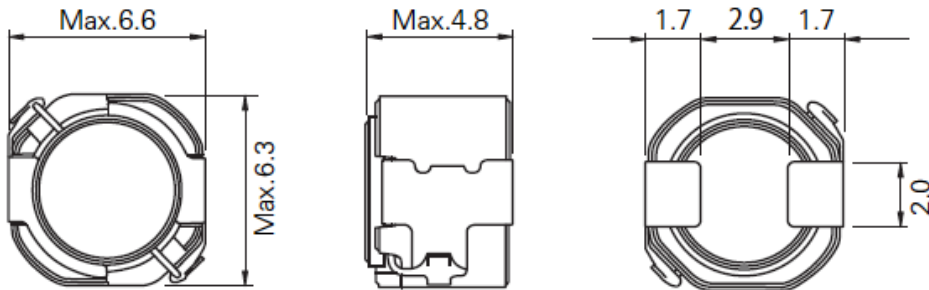


Reference Land pattern [mm]

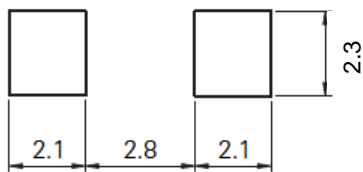

Stamp Example

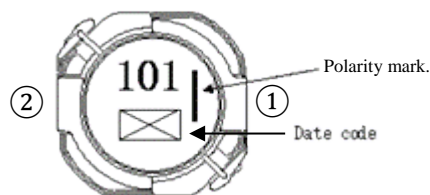

Connection (Bottom View)



Note : This specification is subject to change without notice. Please contact your nearest sales office for updated information when placing an order.

SMD Power Inductor CDRH60D45B/T150



Electrical Characteristics

Part No.	Inductance (μ H) ※1	D.C.R (Ω)	Saturation Current (A) at 20°C TYP. ※2	Temperature Rise Current (A) TYP. ※3
CDRH60D45BT150NP -1R0NC	1.0 \pm 30%	14.3m(11.0m)	8.50	4.80
CDRH60D45BT150NP -1R5NC	1.5 \pm 30%	16.9m(13.0m)	7.20	4.50
CDRH60D45BT150NP -2R2NC	2.2 \pm 30%	19.5m(15.0m)	5.70	4.10
CDRH60D45BT150NP -3R3NC	3.3 \pm 30%	23.4m(18.0m)	5.00	3.70
CDRH60D45BT150NP -4R7NC	4.7 \pm 30%	29.9m(23.0m)	4.10	3.40
CDRH60D45BT150NP -6R8NC	6.8 \pm 30%	35.1m(27.0m)	3.60	3.10
CDRH60D45BT150NP -100MC	10 \pm 20%	45.6m(38.0m)	2.80	2.60
CDRH60D45BT150NP -150MC	15 \pm 20%	76.8m(64.0m)	2.30	2.00
CDRH60D45BT150NP -220MC	22 \pm 20%	98.4m(82.0m)	1.90	1.70
CDRH60D45BT150NP -330MC	33 \pm 20%	126m(105m)	1.56	1.60
CDRH60D45BT150NP -470MC	47 \pm 20%	156m(130m)	1.28	1.40
CDRH60D45BT150NP -680MC	68 \pm 20%	252m(210m)	1.07	1.10
CDRH60D45BT150NP -101MC	100 \pm 20%	408m(340m)	0.90	0.86
CDRH60D45BT150NP -151MC	150 \pm 20%	576m(480m)	0.74	0.72
CDRH60D45BT150NP -221MC	220 \pm 20%	864m(720m)	0.62	0.57
CDRH60D45BT150NP -331MC	330 \pm 20%	1.16(970m)	0.50	0.49

※ Measuring frequency inductance at 100kHz,1V.

※ Saturation current: DC current which becomes inductance value drop by 30% from the nominal value.

※ Temperature rise current: The value of D.C. current when the temperature of coil becomes $\Delta T=40^{\circ}\text{C}$ ($T_a=20^{\circ}\text{C}$).


Please note that when using the product for automotive while applying current with audio-frequency (AF) signals may result in audible noises due to magnetostriction. Also, in order to avoid noise problem, operating with Non-AF signals would be recommended. The noise may amplify depending on the coil mount area on the PCB.

SMD Power Inductor CDRH60D45B/T150




Saturation Current & Temperature Rise Graph — L (25°C) — L (150°C) — ΔT


CDRH60D45BT150NP-1R0NC

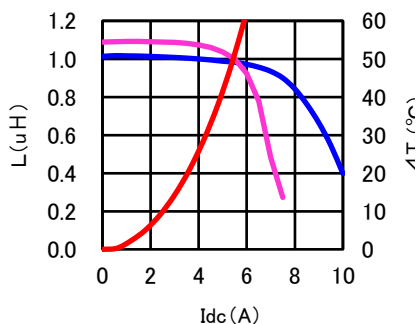


CDRH60D45BT150NP-1R5NC

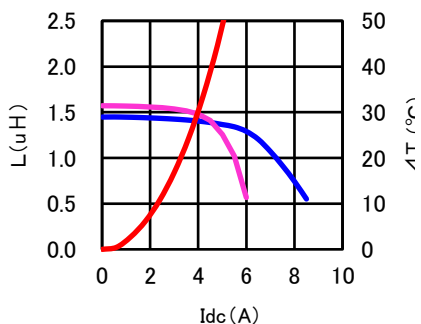


CDRH60D45BT150NP-2R2NC

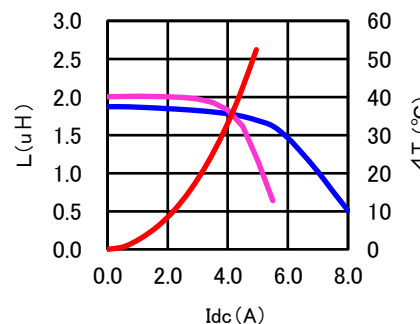


CDRH60D45BT150NP-3R3NC

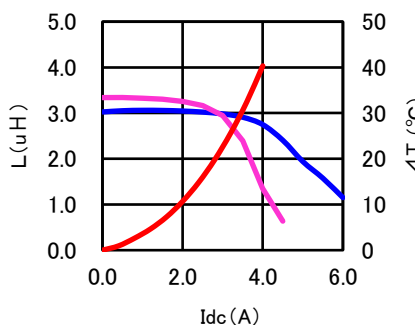


CDRH60D45BT150NP-4R7NC

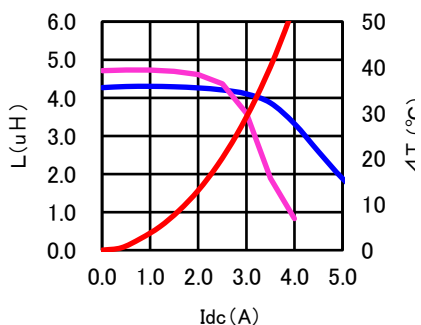


CDRH60D45BT150NP-6R8NC

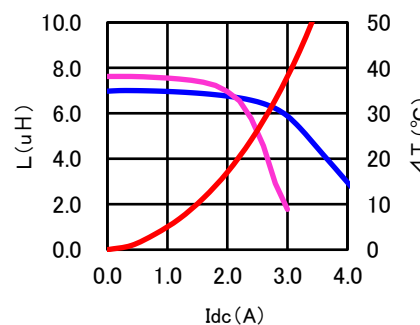


CDRH60D45BT150NP-100MC

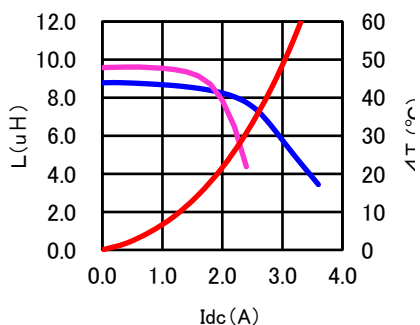

CDRH60D45BT150NP-150MC

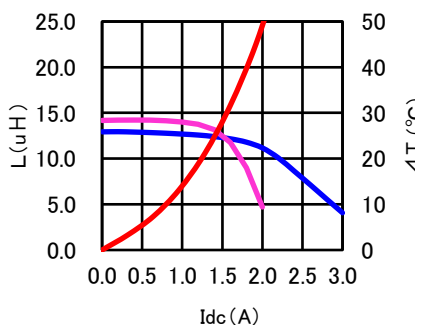

CDRH60D45BT150NP-220MC

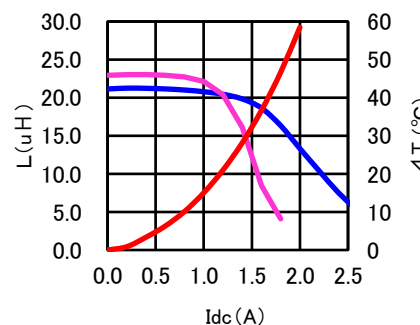

Note : This specification is subject to change without notice. Please contact your nearest sales office for updated information when placing an order.


SMD Power Inductor

CDRH60D45B/T150




Saturation Current & Temperature Rise Graph — L (25°C) — L (150°C) — ΔT


CDRH60D45BT150NP-330MC

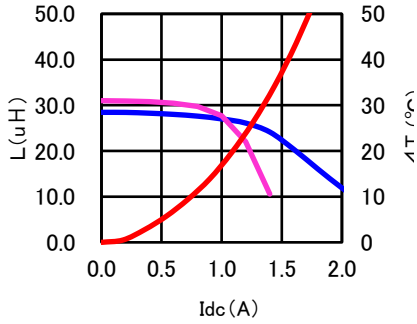


CDRH60D45BT150NP-470MC

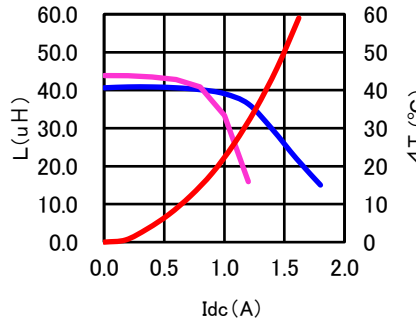


CDRH60D45BT150NP-680MC

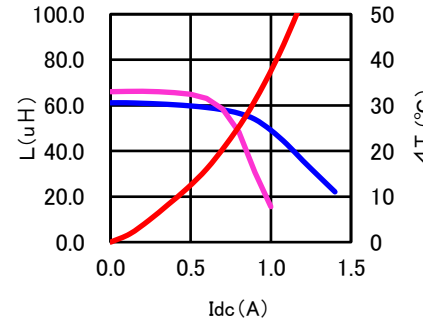


CDRH60D45BT150NP-101MC

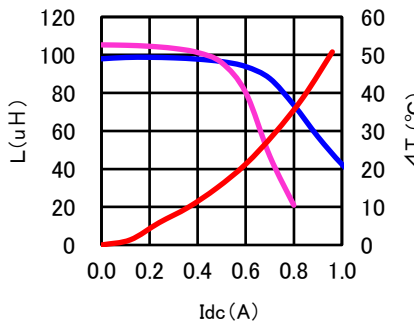


CDRH60D45BT150NP-151MC

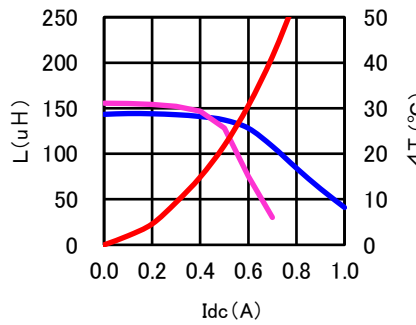

CDRH60D45BT150NP-221MC

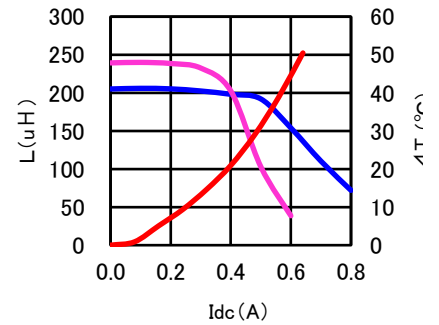

CDRH60D45BT150NP-331MC

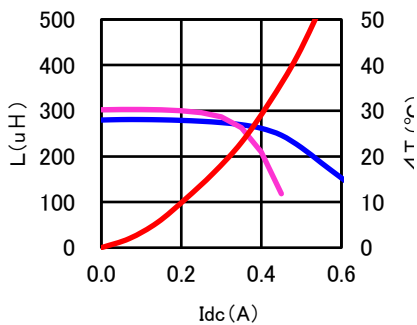


For sales office information, please [click here](#) to visit our website.


Note : This specification is subject to change without notice. Please contact your nearest sales office for updated information when placing an order.

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View CDRH60D45BT150NP-101MC on WIN SOURCE](#)
-  [Sumida America Components Inc. Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management