



**THE DATASHEET OF  
CMR3U-06M TR13 PBFREE**



CMR3U-01M    CMR3U-06M  
 CMR3U-02M    CMR3U-10M  
 CMR3U-04M

**SURFACE MOUNT SILICON  
 ULTRA FAST RECOVERY RECTIFIERS  
 3.0 AMP, 100 THRU 1000 VOLT**



[www.centrasemi.com](http://www.centrasemi.com)

**DESCRIPTION:**

The CENTRAL SEMICONDUCTOR CMR3U-01M series 3.0 Amp surface mount silicon ultra fast recovery rectifier is a highly reliable component designed for use in all types of commercial, industrial, entertainment, computer, and automotive applications.

**MARKING CODE: SEE MARKING CODE TABLE ON FOLLOWING PAGE**



**SMB CASE**

**FEATURES:**

- High reliability
- Glass passivated chip
- Special selections available
- "C" bend construction provides strain relief when mounted on PC board

**MAXIMUM RATINGS:** ( $T_A=25^\circ\text{C}$  unless otherwise noted)

	SYMBOL	CMR3U-01M	CMR3U-02M	CMR3U-04M	CMR3U-06M	CMR3U-10M	UNITS
Peak Repetitive Reverse Voltage	$V_{RRM}$	100	200	400	600	1000	V
DC Blocking Voltage	$V_R$	100	200	400	600	1000	V
RMS Reverse Voltage	$V_{R(RMS)}$	70	140	280	420	700	V
Average Forward Current ( $T_A=75^\circ\text{C}$ )	$I_O$			3.0			A
Peak Forward Surge Current, $t_p=8.3\text{ms}$	$I_{FSM}$			100			A
Operating and Storage Junction Temperature	$T_J, T_{stg}$			-65 to +175			$^\circ\text{C}$
Thermal Resistance	$\theta_{JL}$			30			$^\circ\text{C/W}$

**ELECTRICAL CHARACTERISTICS:** ( $T_A=25^\circ\text{C}$  unless otherwise noted)


SYMBOL	TEST CONDITIONS	MAX	UNITS
$I_R$	$V_R=\text{Rated } V_{RRM}$	5.0	$\mu\text{A}$
$I_R$	$V_R=\text{Rated } V_{RRM}, T_A=100^\circ\text{C}$	500	$\mu\text{A}$
$V_F$	$I_F=3.0\text{A}$ (CMR3U-01M, -02M)	1.00	V
$V_F$	$I_F=3.0\text{A}$ (CMR3U-04M)	1.25	V
$V_F$	$I_F=3.0\text{A}$ (CMR3U-06M)	1.40	V
$V_F$	$I_F=3.0\text{A}$ (CMR3U-10M)	2.00	V
$t_{rr}$	$I_F=0.5\text{A}, I_R=1.0\text{A}, I_{rr}=0.25\text{A}$ (CMR3U-01M, -02M, -04M)	50	ns
$t_{rr}$	$I_F=0.5\text{A}, I_R=1.0\text{A}, I_{rr}=0.25\text{A}$ (CMR3U-06M, -10M)	100	ns

CMR3U-01M    CMR3U-06M  
 CMR3U-02M    CMR3U-10M  
 CMR3U-04M



**SURFACE MOUNT SILICON  
 ULTRA FAST RECOVERY RECTIFIERS  
 3.0 AMP, 100 THRU 1000 VOLT**

**SMB CASE - MECHANICAL OUTLINE**

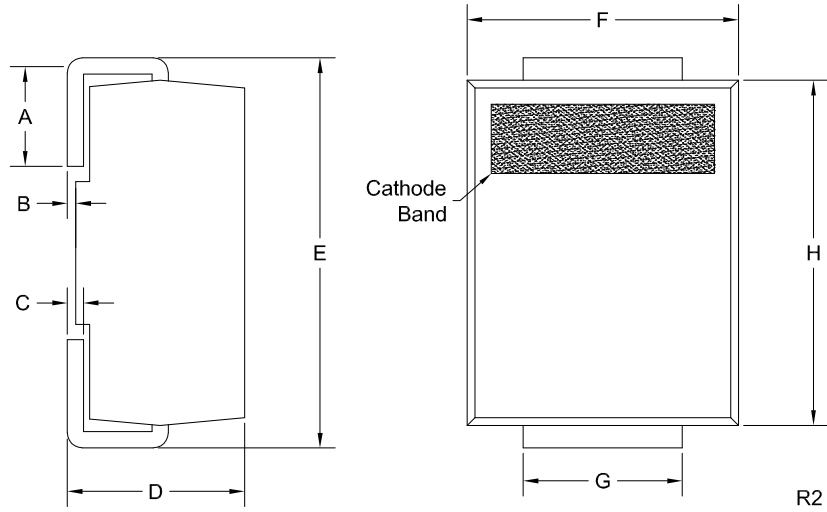

DEVICE	MARKING CODE
CMR3U-01M	CU301M
CMR3U-02M	CU302M
CMR3U-04M	CU304M
CMR3U-06M	CU306M
CMR3U-10M	CU310M

SYMBOL	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.030	0.060	0.76	1.52
B	0.000	0.008	0.00	0.20
C	0.006	0.012	0.15	0.30
D	0.086	0.096	2.18	2.44
E	0.200	0.220	5.08	5.59
F	0.130	0.150	3.30	3.81
G	0.077	0.083	1.96	2.11
H	0.160	0.191	4.06	4.85

SMB (REV: R2)

R4 (4-September 2018)

## OUTSTANDING SUPPORT AND SUPERIOR SERVICES



---

### PRODUCT SUPPORT

Central's operations team provides the highest level of support to insure product is delivered on-time.

- Supply management (Customer portals)
- Inventory bonding
- Consolidated shipping options
- Custom bar coding for shipments
- Custom product packing

---

### DESIGNER SUPPORT/SERVICES

Central's applications engineering team is ready to discuss your design challenges. Just ask.

- Free quick ship samples (2<sup>nd</sup> day air)
- Online technical data and parametric search
- SPICE models
- Custom electrical curves
- Environmental regulation compliance
- Customer specific screening
- Up-screening capabilities
- Special wafer diffusions
- PbSn plating options
- Package details
- Application notes
- Application and design sample kits
- Custom product and package development

---

### REQUESTING PRODUCT PLATING

1. If requesting Tin/Lead plated devices, add the suffix "TIN/LEAD" to the part number when ordering (example: 2N2222A TIN/LEAD).
2. If requesting Lead (Pb) Free plated devices, add the suffix "PBFREE" to the part number when ordering (example: 2N2222A PBFREE).

---

### CONTACT US

#### Corporate Headquarters & Customer Support Team

Central Semiconductor Corp.  
145 Adams Avenue  
Hauppauge, NY 11788 USA  
Main Tel: (631) 435-1110  
Main Fax: (631) 435-1824  
Support Team Fax: (631) 435-3388  
[www.centrasemi.com](http://www.centrasemi.com)

**Worldwide Field Representatives:**  
[www.centrasemi.com/wwreps](http://www.centrasemi.com/wwreps)

**Worldwide Distributors:**  
[www.centrasemi.com/wwdistributors](http://www.centrasemi.com/wwdistributors)

---

For the latest version of Central Semiconductor's **LIMITATIONS AND DAMAGES DISCLAIMER**, which is part of Central's Standard Terms and Conditions of sale, visit: [www.centrasemi.com/terms](http://www.centrasemi.com/terms)

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- [⊖ View \*\*CMR3U-06M TR13 PBFREE\*\* on WIN SOURCE](#)
- [⊖ \*\*Central Semiconductor Corp\*\* Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management