






THE DATASHEET OF BC847A



SPECIFICATION SHEET

| | |
|--------------------------------|---|
| SPECIFICATION SHEET NO. | P0610- SOT23BC847AS1E |
| DATE | June 10, 2022 |
| REVISION | A0 |
| DESCRIPTION | SMD Plastic-Encapsulate Transistors, SOT-23 series, 3 pads BC847A Type, NPN, Collector-Emitter Voltage 45V. Collector Current 100mA Max. Operating Temp. Range -65°C ~+150°C, Package in Tape/Reel, 3000pcs/Reel RoHS/RoHS III compliant |
| CUSTOMER | |
| CUSTOMER PART NUMBER | |
| CROSS REF. PART NUMBER | |
| ORIGINAL PART NUMBER | MDD BC847A |
| PART CODE | SOT23BC847AS1E |

| | | | |
|-------------------------|---|--|---|
| VENDOR APPROVE | | | |
| Issued/Checked/Approved |  |  |  |
| DATE: June 10, 2022 | | | |

| | |
|-------------------------|--|
| CUSTOMER APPROVE | |
| | |
| DATE: | |

6/13/2022

SMD PLASTIC-ENCAPULATE TRANSISTORS SOT23 SERIES

MAIN FEATURE

- Ideally suited for automatic insertion



APPLICATION

- For Switching and AF Amplifier Applications

RFQ

[Request For Quotation](#)

PART CODE GUIDE

| SOT23 | BC847A | S | 1E |
|-------|--------|---|----|
| 1 | 2 | 3 | 4 |

1) **SOT23**: SMD Plastic-Encapsulate Transistors, 3 pads SOT-23 series Code

2) **BC847A**: Type code for BC847A Type

3) **S**: Package code, Package in Tape/Reel, 3000pcs/Reel

4) **1E**: Marking code for "1E" on the case surface, Different Marking for different specification


MORE ITEMS LIST

| | | |
|-----------------------|----------------|----------------|
| SOT23BC846AS1A | SOT23BC846BS1B | |
| SOT23BC847AS1E | SOT23BC847BS1F | SOT23BC847CS1G |
| SOT23BC848AS1J | SOT23BC848BS1K | SOT23BC848CS1L |

SMD PLASTIC-ENCAPULATE TRANSISTORS SOT23 SERIES


DIMENSION (Unit: Inch/mm)

Image for reference

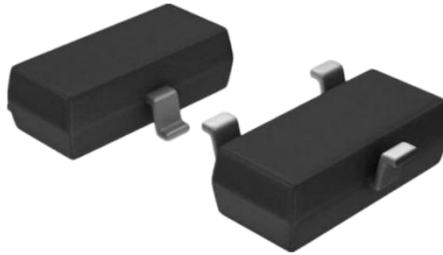



Marking: 1E

SOT-23

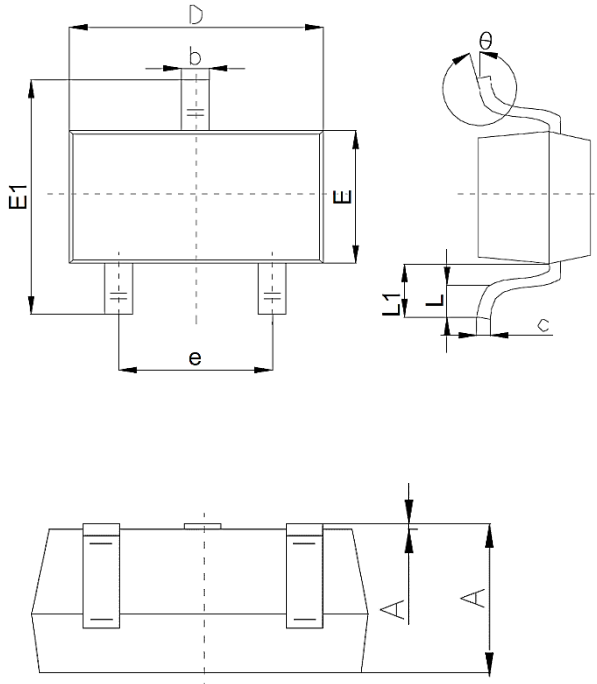

| Symbol | Value (mm) | | |
|--------|--------------|------|------|
| | Min. | Typ. | Max. |
| A | 1.00 | | 1.40 |
| A1 | | | 0.10 |
| b | 0.35 | | 0.50 |
| c | 0.10 | | 0.20 |
| D | 2.70 | 2.90 | 3.10 |
| E | 1.40 | | 1.60 |
| E1 | 2.40 | | 2.80 |
| e | | 1.90 | |
| L | 0.10 | | 0.30 |
| L1 | 0.40 | | |
| θ | 0° | | 10° |

Recommend Pad Layout

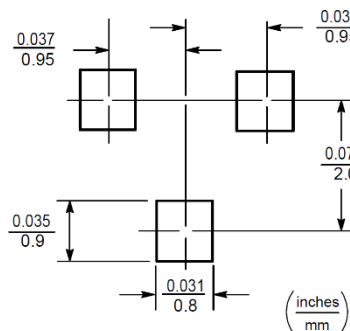

- 1.Base
- 2.Emmitter
- 3.Collector

SMD PLASTIC-ENCAPULATE TRANSISTORS SOT23 SERIES
MECHANICAL DATA

| Case | Terminals | Polarity | Mounting Position | Weight per piece |
|----------------------------------|--|---------------------------------|-------------------|------------------------------|
| JEDEC SOT-23 molded plastic body | Solder plated, Solderable per MIL-STD-750, Method 2026 | Polarity symbol marking on case | Any | 0.00019 Ounce, 0.00591 grams |

MAX. RATINGS AT Ta=25 °C

| Parameter | SYMBOLS | VALUE | UNITS |
|--------------------------------|------------------|------------|-------|
| | | LIMIT | |
| Collector-base Voltage | V _{CBO} | 50 | Volts |
| Collector-emitter Voltage | V _{CEO} | 45 | Volts |
| Emitter-base Voltage | V _{EBO} | 6 | Volts |
| Collector Current - Continuous | I _C | 0.10 | A |
| Collector Power Dissipation | P _C | 200 | mW |
| Junction Temperature | T _J | +150 | °C |
| Storage Temperature Range | T _{STG} | -65 ~ +150 | °C |

SMD PLASTIC-ENCAPULATE TRANSISTORS SOT23 SERIES
ELECTRICAL CHARACTERISTICS AT Ta= 25 °C


| Parameter | SYMBOLS | VALUE | | | UNIT | Condition |
|---|----------------------|-------|------|------|------|--|
| | | Min. | Typ. | Max. | | |
| Collector-base Breakdown Voltage | V _{CBO} | 50 | | | V | I _C = 10 μA, I _E =0 |
| Collector-emitter Breakdown Voltage | V _{CEO} | 45 | | | V | I _C = 10mA, I _B =0 |
| Emitter-base Breakdown Voltage | V _{EBO} | 6 | | | V | I _E = 10 μA, I _C =0 |
| Collector Cut-off Current | I _{CBO} | | | 0.1 | μA | V _{CB} =50V, I _E =0 |
| Collector Cut-off Current | I _{CEO} | | | 0.1 | μA | V _{CB} =45V, I _B =0 |
| Emitter Cut-off Current | I _{EBO} | | | 0.1 | μA | V _{EB} = 5V, I _C =0 |
| DC Current Gain | h _{FE} | 110 | | 220 | | V _{CE} =5V, I _C =2 mA |
| Collector-emitter Saturation Voltage | V _{CE(sat)} | | | 0.5 | V | I _C =100mA, I _B =5 mA |
| Base-emitter Saturation Voltage | V _{BE(sat)} | | | 1.1 | V | I _C =100mA, I _B =5 mA |
| Transition Frequency | f _T | | 100 | | MHz | V _{CE} =5 V, I _C =10mA f= 100 MHz |
| Collector Output Capacitance | C _{ob} | | | 4.5 | pF | V _{CB} =10 V, f=1 MHz |

SMD PLASTIC-ENCCAPULATE TRANSISTORS SOT23 SERIES
RELIABILITY

| Number | Experiment Items | Experiment Method And Conditions | Reference Documents |
|--------|------------------------------------|--|---------------------------------|
| 1 | Solder Resistance Test | Test 260°C± 5°C for 10 ± 2 sec. Immerse body into solder 1/16" ± 1/32" | MIL-STD-750D METHOD-2031.2 |
| 2 | Solderability Test | 230°C ±5°C for 5 sec. | MIL-STD-750D METHOD-2026.1 0 |
| 3 | Pull Test | 1 kg in axial lead direction for 10 sec. | MIL-STD-750D METHOD-2036.4 |
| 4 | Bend Test | 0.5Kg Weight Applied To Each Lead, Bending Arcs 90 °C ± 5 °C For 3 Times | MIL-STD-750D METHOD-2036.4 |
| 5 | High Temperature Reverse Bias Test | TA=100°C for 1000 Hours at VR=80% Rated VR | MIL-STD-750D METHOD-1038.4 |
| 6 | Forward Operation Life Test | TA=25°C Rated Average Rectified Current | MIL-STD-750D METHOD-1027.3 |
| 7 | Intermittent Operation Life Test | On state: 5 min with rated IRMS Power Off state: 5 min with Cool Forced Air. On and off for 1000 cycles. | MIL-STD-750D METHOD-1036.3 |
| 8 | Pressure Cooker Test | 15 PSIG, TA=121°C, 4 hours | MIL-S-19500 APPENOIXC |
| 9 | Temperature Cycling Test | -55°C~+125°C; 30 Minutes For Dwelled Time 5 minutes for transferred time. Total: 10 cycles. | MIL-STD-750D METHOD-1051.7 |
| 10 | Thermal Shock Test | 0°C for 5 minutes., 100°C for 5minutes, Total: 10 cycles | MIL-STD-750D METHOD-1056.7 |
| 11 | Forward Surge Test | 8.3ms Single Sale Sine-wave One Surge. | MIL-STD-750D METHOD-4066.4 |
| 12 | Humidity Test | TA=65°C, RH=98% for 1000 hours. | MIL-STD-750D METHOD-1021.3 |
| 13 | High Temperature Storage life Test | 150°C for 1000 Hours | MIL-STD-750D METHOD-1031.5 |

SMD PLASTIC-ENCAPULATE TRANSISTORS SOT23 SERIES





SUGGESTED REFLOW PROFILE (For Reference Only)

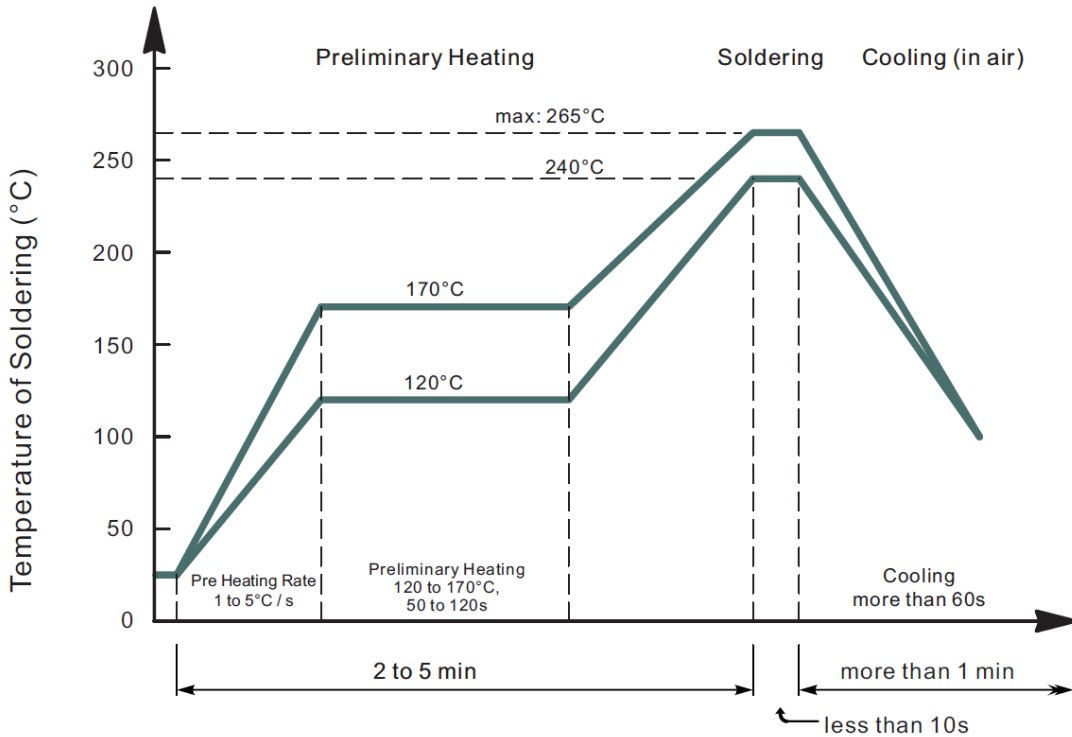

- Recommended peak temperature is over 245°C, If peak temperature is below 245 °C, you may adjust the following parameters; time length of peak temperature (longer), time length of soldering (longer), thickness of solder paste (thicker)
- Welding shall not exceed 2 times
- Remark: lead free solder paste (96.5 sn/3.0 Ag/0.5Cu)





SMD PLASTIC-ENCAPULATE TRANSISTORS SOT23 SERIES

RATINGS AND CHARACTERISTIC CURVES (For Reference Only)

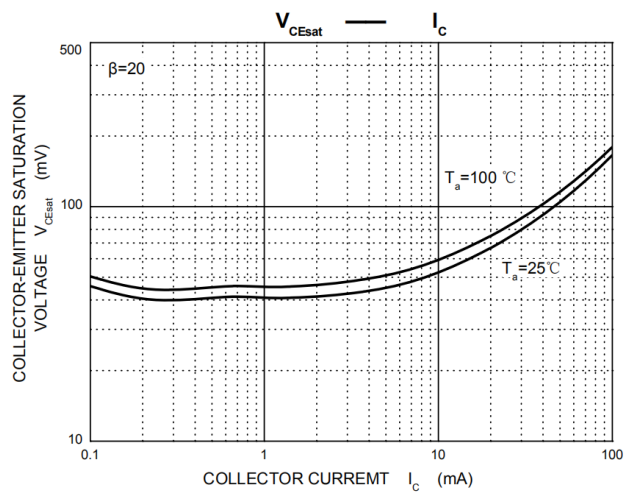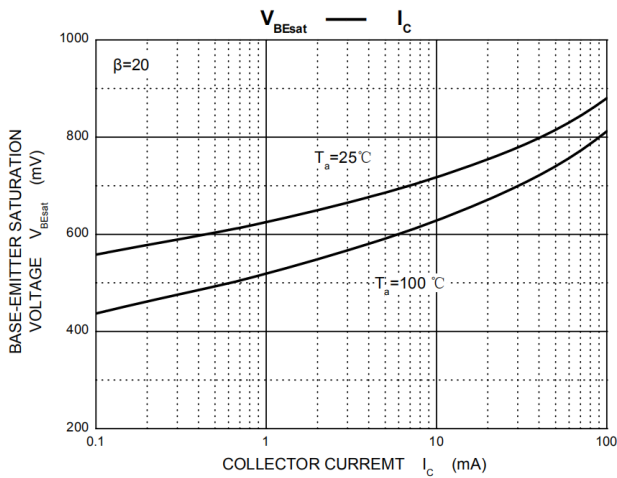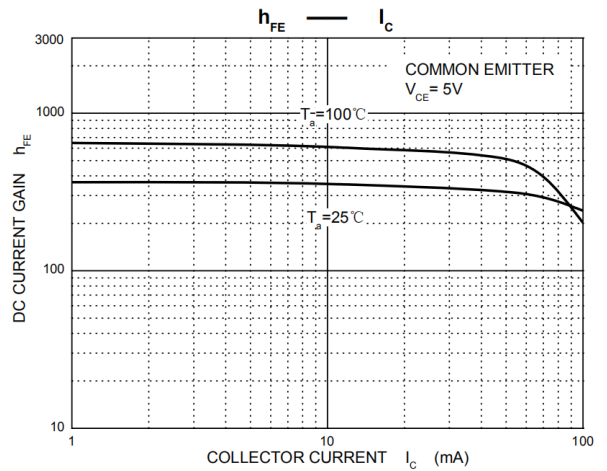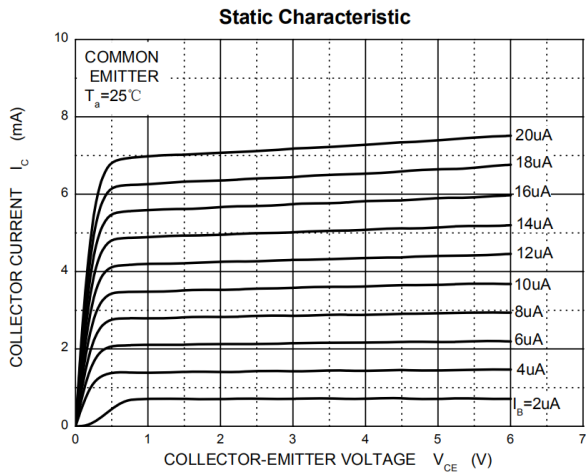

SMD PLASTIC-ENCAPULATE TRANSISTORS SOT23 SERIES


RATINGS AND CHARACTERISTIC CURVES (For Reference Only)

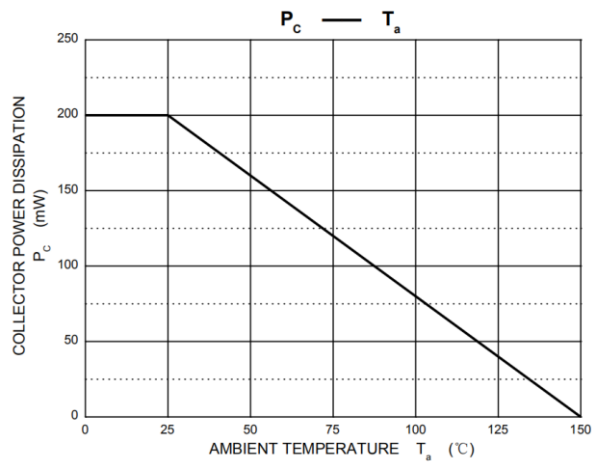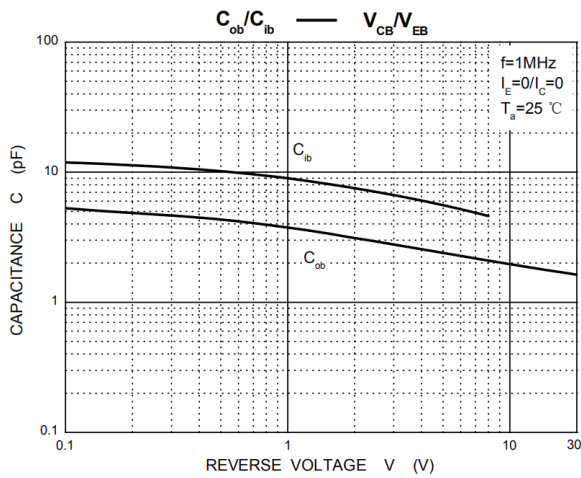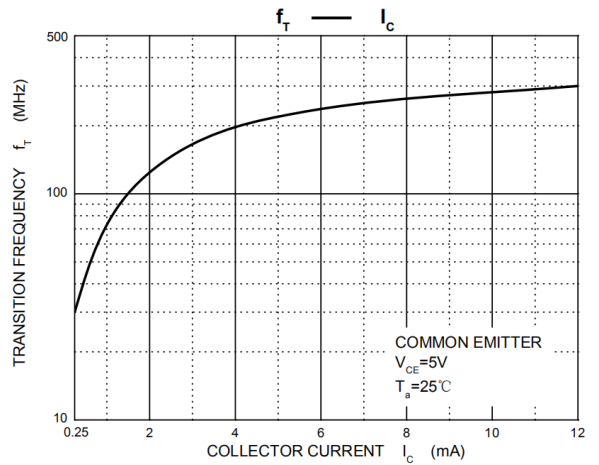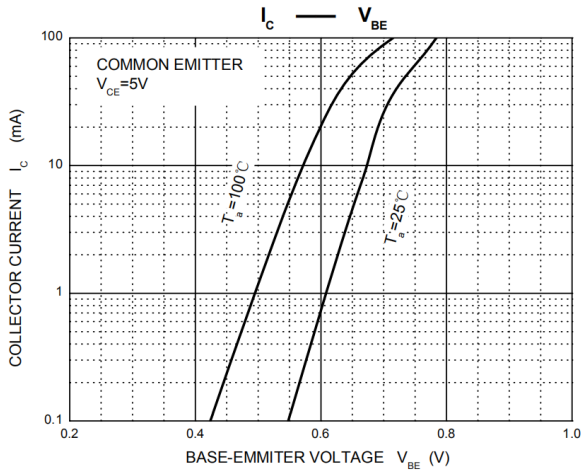

SMD PLASTIC-ENCAPULATE TRANSISTORS SOT23 SERIES

TAPE/REEL (Unit: mm)

All Devices are packed in accordance with EIA standard RS-481-A and specifications.

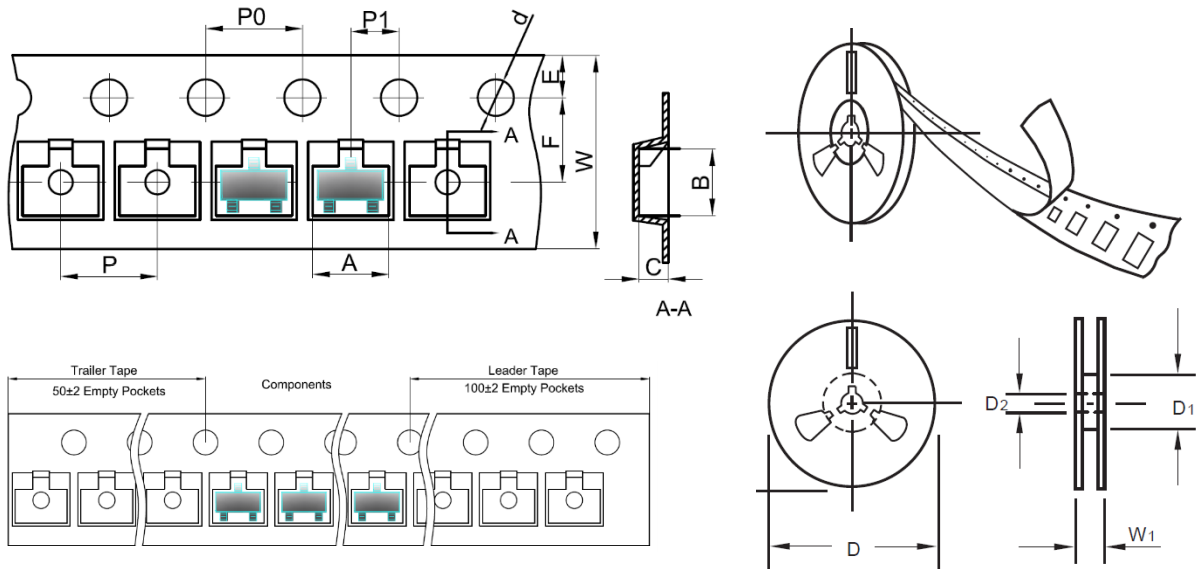

| Item | Symbol | Tolerance | SOT-23 |
|-------------------------|--------|-----------|--------|
| Carrier width | A | 0.1 | 3.15 |
| Carrier Length | B | 0.1 | 2.77 |
| Carrier Depth | C | 0.1 | 1.22 |
| Sprocket hole | d | 0.05 | 1.55 |
| 7"Reel outside diameter | D | 2.0 | 178.00 |
| 7"Reel inner diameter | D1 | Min. | 54.4 |
| Feed hole diameter | D2 | 0.5 | 13.00 |
| Sprocket hole position | E | 0.1 | 1.75 |
| Punch hole position | F | 0.1 | 3.50 |
| Punch hole pitch | P | 0.1 | 4.00 |
| Sprocket hole pitch | P0 | 0.1 | 4.00 |
| Embossment center | P1 | 0.1 | 2.00 |
| Overall tape thickness | T | 0.1 | 0.25 |
| Tape width | W | 0.3 | 8.00 |
| Reel width | W1 | 1.0 | 19.50 |

SMD PLASTIC-ENCAPULATE TRANSISTORS SOT23 SERIES

PACKAGE

| | |
|------------------|----------|
| Case Code | SOT-23 |
| Reel Size | 7" |
| Reel Size | 178 mm |
| MPQ/Reel | 3000 pcs |
| Qty. /Box | 6000 pcs |
| G.W/Box | 1 LBS |

DISCLAIMER

NextGen Component, Inc. reserves the right to make changes to the product(s) and or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information







Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View BC847A on WIN SOURCE](#)

 [MDD Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management