



**THE DATASHEET OF
ISL9104IRUNZ-T**



ISL9104, ISL9104A

500mA 4.3MHz Low I_Q High Efficiency Synchronous Buck Converter

FN6829
Rev 5.00

The ISL9104, ISL9104A is a 500mA, 4.3MHz step-down regulator, which is ideal for powering low-voltage microprocessors in compact devices such as PDAs and cellular phones. It is optimized for generating low output voltages down to 0.8V. The supply voltage range is from 2.7V to 6V allowing the use of a single Li+ cell, three NiMH cells or a regulated 5V input. It has guaranteed minimum output current of 500mA. A high switching frequency of 4.3MHz pulse-width modulation (PWM) allows using small external components. Under light load condition, the device operates at low I_Q skip mode with typical 20μA quiescent current for highest light load efficiency to maximize battery life, and it automatically switches to fixed frequency PWM mode under heavy load condition.

The ISL9104, ISL9104A includes a pair of low ON-resistance P-Channel and N-Channel internal MOSFETs to maximize system efficiency and minimize the external component count. 100% duty-cycle operation allows less than 300mV dropout voltage at 500mA.

The ISL9104, ISL9104A offers internal digital soft-start, enable for power sequence, overcurrent protection and thermal shutdown functions. In addition, the ISL9104, ISL9104A offers a quick bleeding function that discharges the output capacitor when the IC is disabled.

The ISL9104, ISL9104A is offered in a 1.6x1.6mm μTDFN package. The complete converter occupies less than 0.5CM².

Applications

- Single Li-ion Battery-Powered Equipment
- Mobile Phones and MP3 Players
- PDAs and Palmtops
- WCDMA Handsets
- Portable Instruments

Features

- High Efficiency Integrated Synchronous Buck Regulator with up to 93% Efficiency
- 2.7V to 6.0V Supply Voltage
- 4.3MHz PWM Switching Frequency
- 500mA Guaranteed Output Current
- 3% Output Accuracy Over-Temperature and Line for Fixed Output Options
- 20μA Quiescent Supply Current in Skip Mode
- Less than 1μA Logic Controlled Shutdown Current
- 100% Maximum Duty Cycle for Lowest Dropout
- Ultrasonic Switching Frequency at Skip Mode to Prevent Audible Frequency Noise (For ISL9104A Only)
- Discharge Output Capacitor when Disabled
- Internal Digital Soft-Start
- Peak Current Limiting, Short Circuit Protection
- Over-Temperature Protection
- Chip Enable
- Small 6 Pin 1.6mmx1.6mm μTDFN Package
- Pb-Free (RoHS Compliant)

Related Literature

- See [AN1522](#), "ISL9104xxxxEVAL1Z, ISL9104AxxxxEVAL1Z Evaluation Board Application Manual"

Pin Configuration

ISL9104, ISL9104A
(6 LD 1.6x1.6 μTDFN)
TOP VIEW

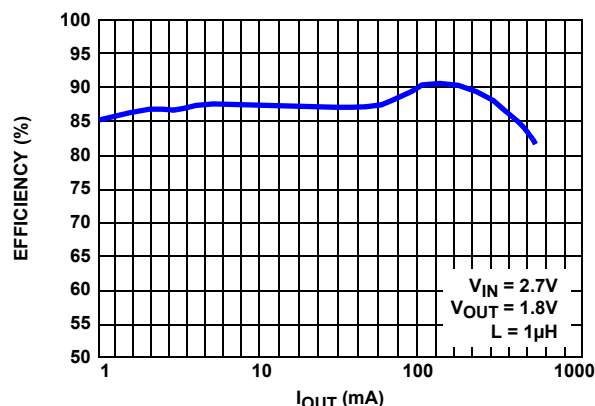



FIGURE 1. EFFICIENCY vs OUTPUT CURRENT

Pin Descriptions

| PIN NUMBER | PIN NAME | DESCRIPTION |
|------------|----------|---|
| 1 | VIN | Input supply voltage. Typically connect a 10 μ F ceramic capacitor to ground. |
| 2 | EN | Regulator enable pin. Enable the device when driven to high. Shut down the chip and discharge output capacitor when driven to low. Do not leave this pin floating. |
| 3 | NC | No connect; leave floating. |
| 4 | FB | Buck converter output feedback pin. For adjustable output version, its typical value is 0.8V and connect it to the output through a resistor divider for desired output voltage; for fixed output version, directly connect this pin to the converter output. |
| 5 | GND | Ground connection. |
| 6 | SW | Switching node connection. Connect to one terminal of inductor. |

Typical Applications

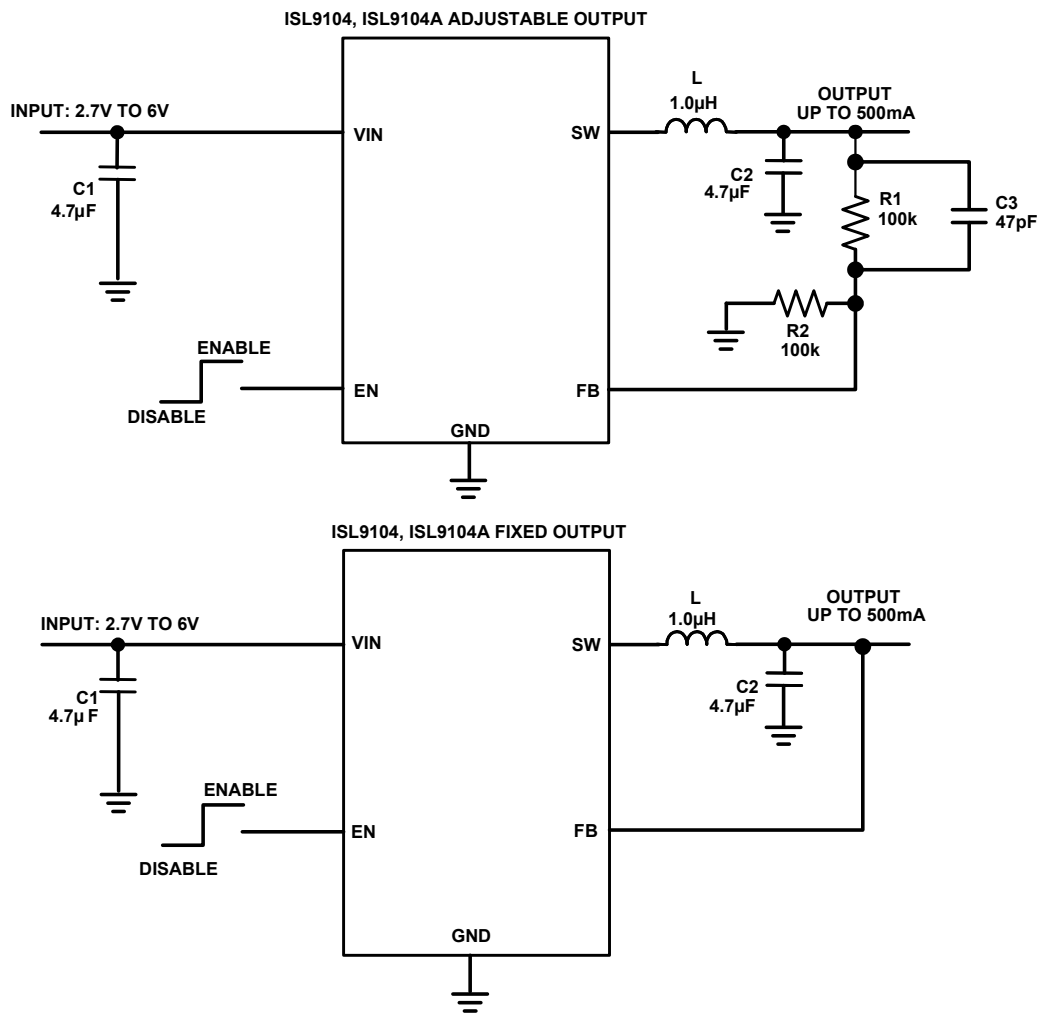


FIGURE 2. TYPICAL APPLICATIONS DIAGRAM

Note: For adjustable output version, the internal feedback resistor divider is disabled and the FB pin is directly connected to the error amplifier.

| PARTS | DESCRIPTION | MANUFACTURERS | PART NUMBER | SPECIFICATIONS | SIZE |
|--------|----------------------------|---------------|--------------------|-----------------|-------------------|
| L | Inductor | KEMET | LB3218-T1R0MK | 1.0μH/1.0A/60mΩ | 3.2mmx1.8mmx1.8mm |
| C1, C2 | Input and output capacitor | Murata | GRM188R60J475KE19D | 4.7μF/6.3V, X5R | 0603 |
| C3 | Capacitor | KEMET | C0402C470J5GACTU | 47pF/50V | 0402 |
| R1, R2 | Resistor | Various | - | 100kΩ, SMD, 1% | 0402 |

Ordering Information

| PART NUMBER (Notes 1, 3, 4) | PART MARKING | OUTPUT VOLTAGE (V) (Note 2) | ULTRASONIC FUNCTION | TEMP RANGE (°C) | PACKAGE Tape and Reel (Pb-Free) | PKG DWG. # |
|--------------------------------|------------------|--------------------------------|------------------------|--------------------|---------------------------------------|---------------|
| ISL9104IRUNZ-T | K6 | 3.3 | NO | -40 to +85 | 6 Ld μTDFN | L6.1.6x1.6 |
| ISL9104IRUJZ-T | K7 | 2.8 | NO | -40 to +85 | 6 Ld μTDFN | L6.1.6x1.6 |
| ISL9104IRUFZ-T | K8 | 2.5 | NO | -40 to +85 | 6 Ld μTDFN | L6.1.6x1.6 |
| ISL9104IRUDZ-T | K9 | 2.0 | NO | -40 to +85 | 6 Ld μTDFN | L6.1.6x1.6 |
| ISL9104IRUCZ-T | L0 | 1.8 | NO | -40 to +85 | 6 Ld μTDFN | L6.1.6x1.6 |
| ISL9104IRUBZ-T | L1 | 1.5 | NO | -40 to +85 | 6 Ld μTDFN | L6.1.6x1.6 |
| ISL9104IRUWZ-T | L2 | 1.2 | NO | -40 to +85 | 6 Ld μTDFN | L6.1.6x1.6 |
| ISL9104IRUAZ-T | L3 | ADJ | NO | -40 to +85 | 6 Ld μTDFN | L6.1.6x1.6 |
| ISL9104AIRUNZ-T | L4 | 3.3 | YES | -40 to +85 | 6 Ld μTDFN | L6.1.6x1.6 |
| ISL9104AIRUJZ-T | L5 | 2.8 | YES | -40 to +85 | 6 Ld μTDFN | L6.1.6x1.6 |
| ISL9104AIRUFZ-T | L6 | 2.5 | YES | -40 to +85 | 6 Ld μTDFN | L6.1.6x1.6 |
| ISL9104AIRUDZ-T | L7 | 2.0 | YES | -40 to +85 | 6 Ld μTDFN | L6.1.6x1.6 |
| ISL9104AIRUCZ-T | L8 | 1.8 | YES | -40 to +85 | 6 Ld μTDFN | L6.1.6x1.6 |
| ISL9104AIRUBZ-T | L9 | 1.5 | YES | -40 to +85 | 6 Ld μTDFN | L6.1.6x1.6 |
| ISL9104AIRUWZ-T | M0 | 1.2 | YES | -40 to +85 | 6 Ld μTDFN | L6.1.6x1.6 |
| ISL9104AIRUAZ-T | M1 | ADJ | YES | -40 to +85 | 6 Ld μTDFN | L6.1.6x1.6 |
| ISL9104AIRUAEVAL1Z | Evaluation Board | | | | | |
| ISL9104AIRUBEVAL1Z | Evaluation Board | | | | | |
| ISL9104AIRUCEVAL1Z | Evaluation Board | | | | | |
| ISL9104AIRUDEVAL1Z | Evaluation Board | | | | | |
| ISL9104AIRUFEVAL1Z | Evaluation Board | | | | | |
| ISL9104AIRUJEVAL1Z | Evaluation Board | | | | | |
| ISL9104AIRUNEVAL1Z | Evaluation Board | | | | | |
| ISL9104AIRUWEVAL1Z | Evaluation Board | | | | | |
| ISL9104IRUAEVAL1Z | Evaluation Board | | | | | |
| ISL9104IRUBEVAL1Z | Evaluation Board | | | | | |
| ISL9104IRUCEVAL1Z | Evaluation Board | | | | | |
| ISL9104IRUDEVAL1Z | Evaluation Board | | | | | |
| ISL9104IRUFEVAL1Z | Evaluation Board | | | | | |
| ISL9104IRUJEVAL1Z | Evaluation Board | | | | | |
| ISL9104IRUNEVAL1Z | Evaluation Board | | | | | |
| ISL9104IRUWEVAL1Z | Evaluation Board | | | | | |

NOTES:

1. Please refer to [TB347](#) for details on reel specifications.
2. Other output voltage options may be available upon request, please contact Intersil for more details.
3. These Intersil Pb-free plastic packaged products employ special Pb-free material sets; molding compounds/die attach materials and NiPdAu plate - e4 termination finish, which is RoHS compliant and compatible with both SnPb and Pb-free soldering operations. Intersil Pb-free products are MSL classified at Pb-free peak reflow temperatures that meet or exceed the Pb-free requirements of IPC/JEDEC J STD-020.
4. For Moisture Sensitivity Level (MSL), please see device information page for [ISL9104, ISL9104A](#). For more information on MSL please see techbrief [TB363](#).

Absolute Maximum Ratings

| | |
|--------------------------------------|---------------|
| VIN, EN to GND | -0.3V to 6.5V |
| SW to GND | -1.5V to 6.5V |
| FB to GND (for adjustable version) | -0.3V to 2.7V |
| FB to GND (for fixed output version) | -0.3V to 3.6V |

Recommended Operating Conditions

| | |
|---------------------------|----------------|
| VIN Supply Voltage Range | 2.7V to 6.0V |
| Load Current | up to 500mA |
| Ambient Temperature Range | -40°C to +85°C |

Thermal Information

| | |
|--------------------------------------|---|
| Thermal Resistance (Typical, Note 5) | θ_{JA} (°C/W) |
| 1.6x1.6 μ TDFN Package | 160 |
| Junction Temperature Range | -40°C to +125°C |
| Storage Temperature Range | -65°C to +150°C |
| Pb-free Reflow Profile | see link below |
| | http://www.intersil.com/pbfree/Pb-FreeReflow.asp |

CAUTION: Do not operate at or near the maximum ratings listed for extended periods of time. Exposure to such conditions may adversely impact product reliability and result in failures not covered by warranty.

NOTE:

- θ_{JA} is measured with the component mounted on a high effective thermal conductivity test board in free air. See Tech Brief TB379 for details.

Electrical Specifications

Unless otherwise noted, all parameter limits are guaranteed over the recommended operating conditions and the typical specifications are measured at the following conditions: $T_A = +25^\circ\text{C}$, $V_{IN} = V_{EN} = 3.6\text{V}$, $L = 1.0\mu\text{H}$, $C_1 = 4.7\mu\text{F}$, $C_2 = 4.7\mu\text{F}$, $I_{OUT} = 0\text{A}$ (see "Typical Applications" on page 2). **Boldface limits apply over the operating temperature range, -40°C to +85°C.**

| PARAMETER | SYMBOL | TEST CONDITIONS | MIN (Note 6) | TYP | MAX (Note 6) | UNITS |
|---|------------|--|--------------|--------|--------------|---------------|
| SUPPLY | | | | | | |
| Undervoltage Lockout Threshold (UVLO) | V_{UVLO} | $T_A = +25^\circ\text{C}$, Rising | - | 2.5 | 2.7 | V |
| UVLO Hysteresis | | | 50 | 150 | - | mV |
| Quiescent Supply Current (for ISL9104 adjustable output voltage only) | I_{VIN1} | In skip mode, no load at the output, no switch, $V_{IN} = 6.0\text{V}$ | - | 20 | 34 | μA |
| Quiescent Supply Current (for ISL9104A adjustable output only) | I_{VIN2} | In skip mode, no load at the output, no switch, $V_{IN} = 6.0\text{V}$ | - | 32 | 45 | μA |
| Quiescent Supply Current (for ISL9104A 1.5V fixed output) | | In skip mode, no load at the output, $V_{IN} = 6.0\text{V}$ | - | 84 | - | μA |
| Shut Down Supply Current | I_{SD} | $V_{IN} = 6.0\text{V}$, EN = LOW | - | 0.05 | 1 | μA |
| OUTPUT REGULATION | | | | | | |
| FB Voltage Accuracy (for adjustable output only) | | $T_A = 0^\circ\text{C}$ to $+85^\circ\text{C}$ | -2 | - | +2 | % |
| | | | -2.5 | - | +2.5 | % |
| FB Voltage | V_{FB} | | | 0.8 | | V |
| FB Bias Current (for adjustable output only) | I_{FB} | $V_{FB} = 0.75\text{V}$ | - | 5 | 100 | nA |
| Output Voltage Accuracy (for fixed output voltage only) | | PWM Mode | -3 | - | 3 | % |
| Line Regulation | | $V_{IN} = V_O + 0.5\text{V}$ to 6V (minimal 2.7V) | - | 0.2 | - | %/V |
| Load Regulation | | $V_{IN} = 3.6\text{V}$, $I_O = 150\text{mA}$ to 500mA | - | 0.0009 | - | %/mA |
| SW | | | | | | |
| P-Channel MOSFET ON-Resistance | | $V_{IN} = 3.6\text{V}$, $I_O = 200\text{mA}$ | - | 0.45 | 0.6 | Ω |
| | | $V_{IN} = 2.7\text{V}$, $I_O = 200\text{mA}$ | - | 0.55 | 0.72 | Ω |
| N-Channel MOSFET ON-Resistance | | $V_{IN} = 3.6\text{V}$, $I_O = 200\text{mA}$ | - | 0.4 | 0.52 | Ω |
| | | $V_{IN} = 2.7\text{V}$, $I_O = 200\text{mA}$ | - | 0.5 | 0.65 | Ω |
| N-Channel Bleeding MOSFET ON-Resistance | | | - | 100 | - | Ω |
| P-Channel MOSFET Peak Current Limit | I_{PK} | $V_{IN} = 4.2\text{V}$ | 0.75 | 1.00 | 1.35 | A |
| Maximum Duty Cycle | | | - | 100 | - | % |

Electrical Specifications Unless otherwise noted, all parameter limits are guaranteed over the recommended operating conditions and the typical specifications are measured at the following conditions: $T_A = +25^\circ\text{C}$, $V_{IN} = V_{EN} = 3.6\text{V}$, $L = 1.0\mu\text{H}$, $C_1 = 4.7\mu\text{F}$, $C_2 = 4.7\mu\text{F}$, $I_{OUT} = 0\text{A}$ (see “Typical Applications” on page 2). **Boldface limits apply over the operating temperature range, -40°C to $+85^\circ\text{C}$.** (Continued)

| PARAMETER | SYMBOL | TEST CONDITIONS | MIN (Note 6) | TYP | MAX (Note 6) | UNITS |
|-----------------------------|--------|---|--------------|------|--------------|------------------|
| SW Leakage Current | | SW at Hi-Z state | - | 0.01 | 2 | μA |
| PWM Switching Frequency | f_S | $V_{IN} = 3.6\text{V}$, $T_A = -20^\circ\text{C}$ to $+85^\circ\text{C}$ | 3.6 | 4.3 | 4.9 | MHz |
| SW Minimum On-Time | | | - | 65 | - | ns |
| Soft-Start-Up Time | | | - | 1.0 | - | ms |
| EN | | | | | | |
| Logic Input Low | | | - | - | 0.4 | V |
| Logic Input High | | | 1.4 | - | - | V |
| Logic Input Leakage Current | | | - | 0.1 | 1 | μA |
| Thermal Shutdown | | | - | 130 | - | $^\circ\text{C}$ |
| Thermal Shutdown Hysteresis | | | - | 30 | - | $^\circ\text{C}$ |

NOTE:

6. Parameters with MIN and/or MAX limits are 100% tested at $+25^\circ\text{C}$, unless otherwise specified. Temperature limits established by characterization and are not production tested.

Typical Operating Performance

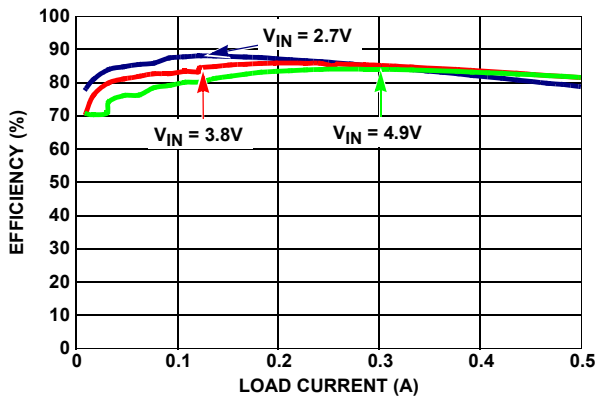


FIGURE 3. EFFICIENCY vs LOAD CURRENT ($V_{OUT} = 1.5\text{V}$)

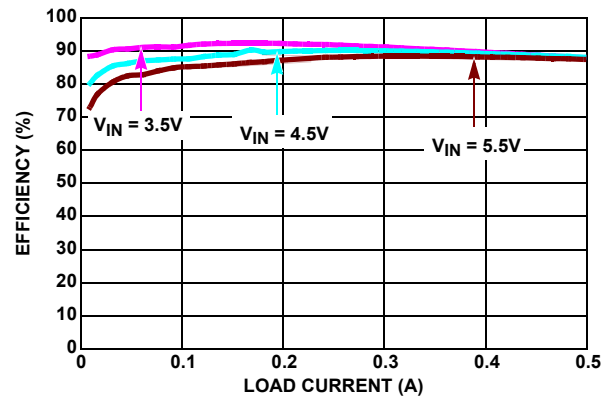


FIGURE 4. EFFICIENCY vs LOAD CURRENT ($V_{OUT} = 2.5\text{V}$)

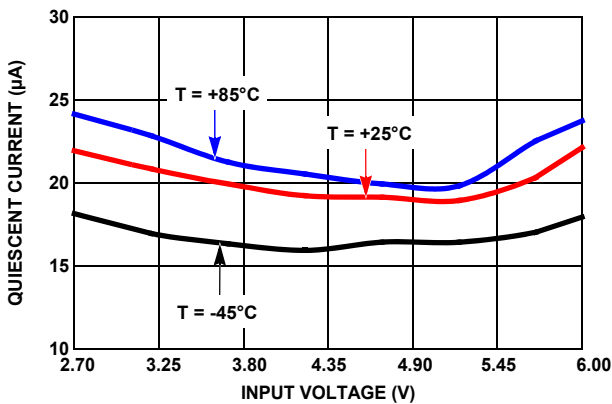


FIGURE 5. INPUT QUIESCENT CURRENT vs V_{IN} ($V_{OUT} = 2.5\text{V}$)

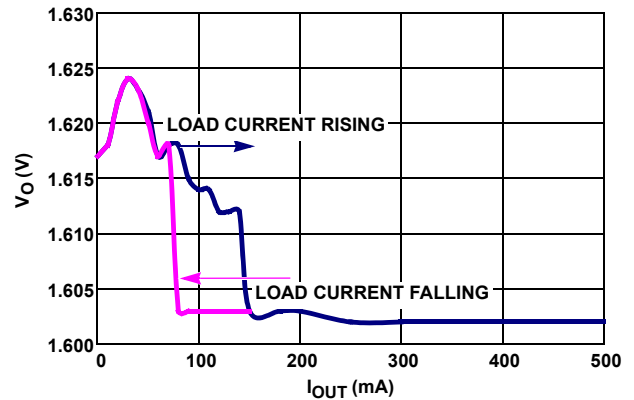


FIGURE 6. OUTPUT VOLTAGE vs LOAD CURRENT ($V_{IN} = 3.6\text{V}$, $V_{OUT} = 1.6\text{V}$)

Typical Operating Performance (Continued)

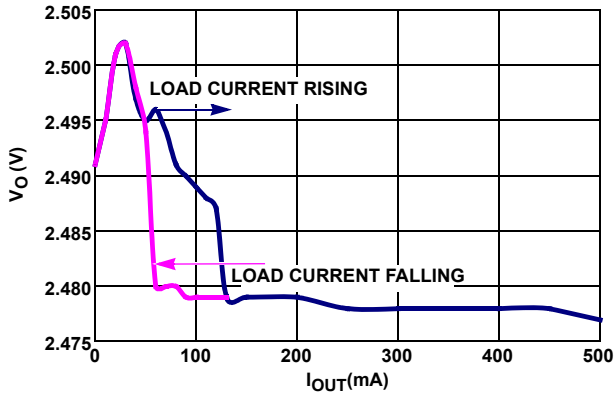


FIGURE 7. OUTPUT VOLTAGE vs LOAD CURRENT ($V_{IN} = 4.0V$, $V_{OUT} = 2.5V$)

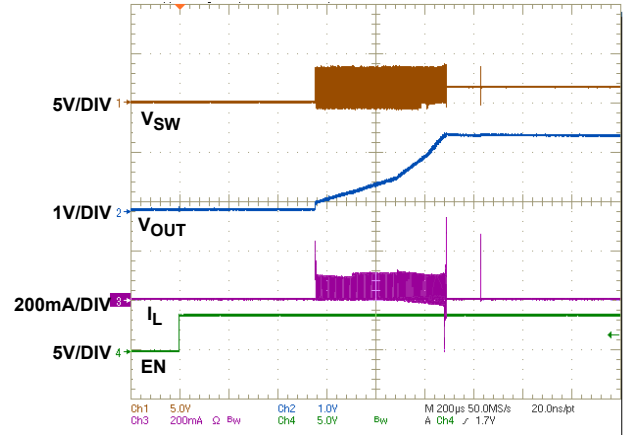


FIGURE 8. SOFT-START TO PFM MODE ($V_{IN} = 3.6V$, $V_{OUT} = 1.5V$, $I_{OUT} = 0.001mA$)

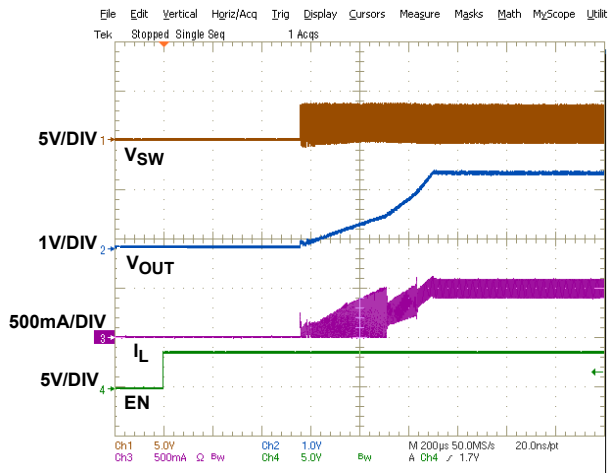


FIGURE 9. SOFT-START TO PWM MODE ($V_{IN} = 3.6V$, $V_{OUT} = 1.5V$, $I_{OUT} = 500mA$)

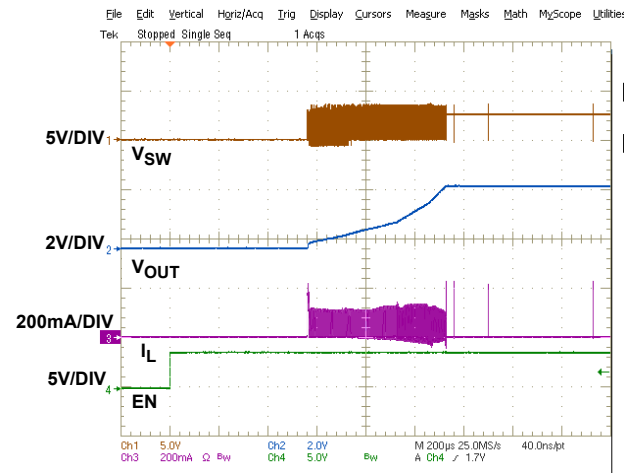


FIGURE 10. SOFT-START TO PFM MODE ($V_{IN} = 3.6V$, $V_{OUT} = 2.5V$, $I_{OUT} = 0.001mA$)

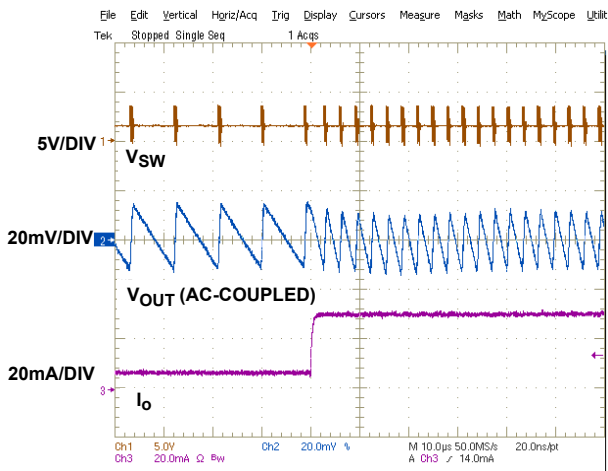


FIGURE 11. LOAD TRANSIENT IN PFM MODE ($V_{IN} = 3.6V$, $V_{OUT} = 1.5V$, 5mA TO 30mA)

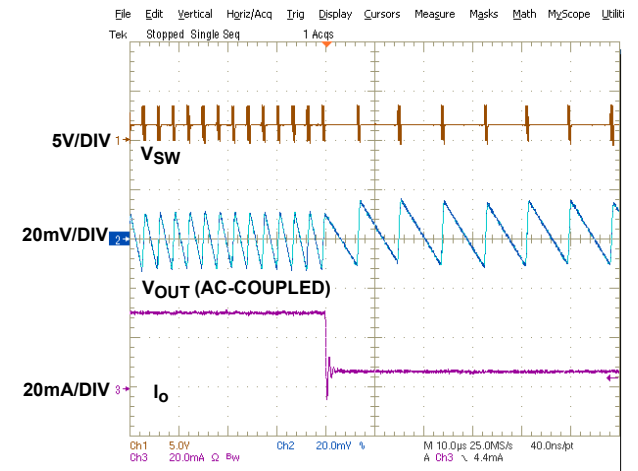


FIGURE 12. LOAD TRANSIENT IN PFM MODE ($V_{IN} = 3.6V$, $V_{OUT} = 1.5V$, 30mA TO 5mA)

Typical Operating Performance (Continued)

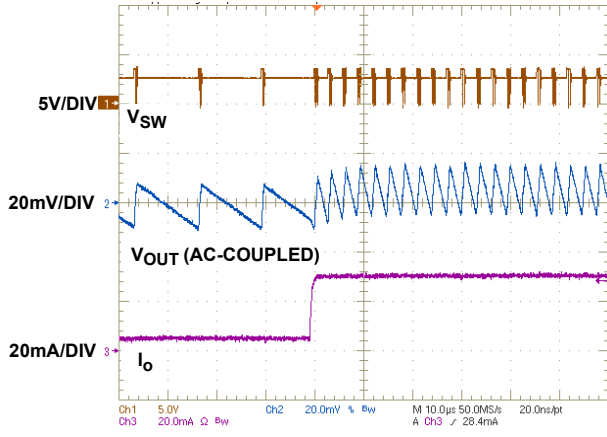


FIGURE 13. LOAD TRANSIENT IN PFM MODE ($V_{IN} = 3.6V$, $V_{OUT} = 2.5V$, 5mA TO 30mA)

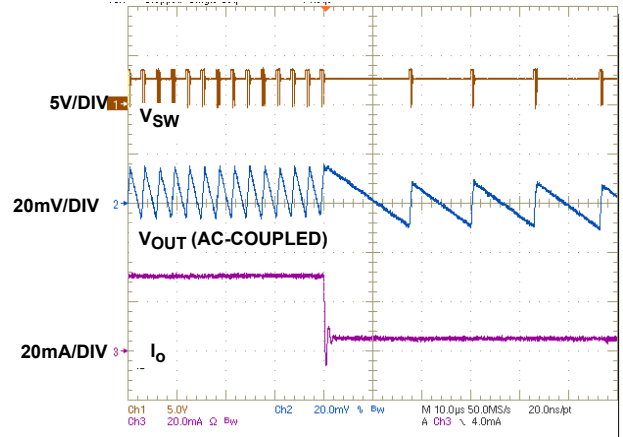


FIGURE 14. LOAD TRANSIENT IN PFM MODE ($V_{IN} = 3.6V$, $V_{OUT} = 2.5V$, 30mA TO 5mA)

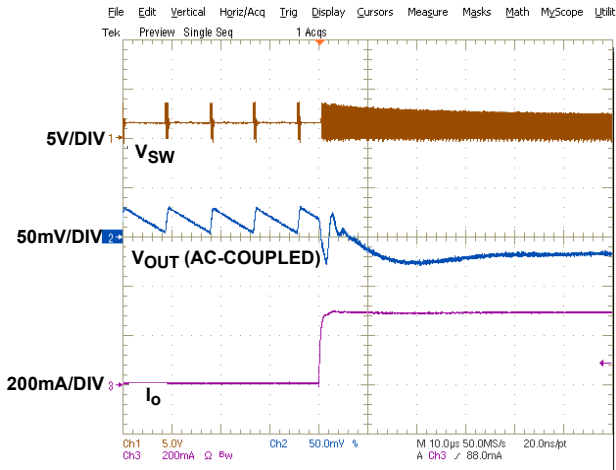


FIGURE 15. LOAD TRANSIENT FROM PFM TO PWM MODE ($V_{IN} = 3.6V$, $V_{OUT} = 1.5V$, 5mA TO 300mA)

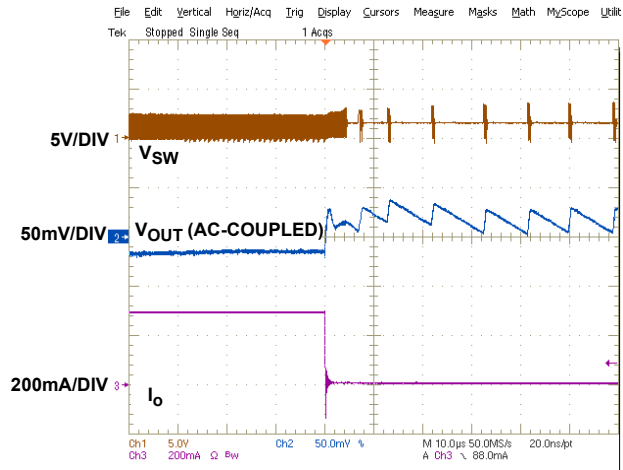


FIGURE 16. LOAD TRANSIENT FROM PWM TO PFM MODE ($V_{IN} = 3.6V$, $V_{OUT} = 1.5V$, 300mA TO 5mA)



FIGURE 17. LOAD TRANSIENT FROM PFM TO PWM MODE ($V_{IN} = 3.6V$, $V_{OUT} = 2.5V$, 5mA TO 300mA)

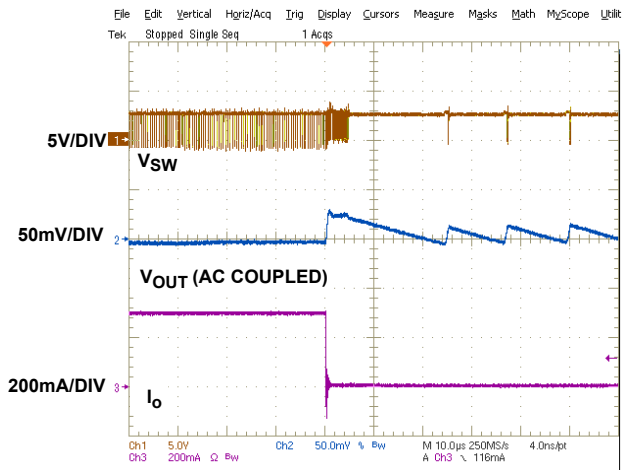


FIGURE 18. LOAD TRANSIENT FROM PWM TO PFM MODE ($V_{IN} = 3.6V$, $V_{OUT} = 2.5V$, 300mA TO 5mA)

Typical Operating Performance (Continued)

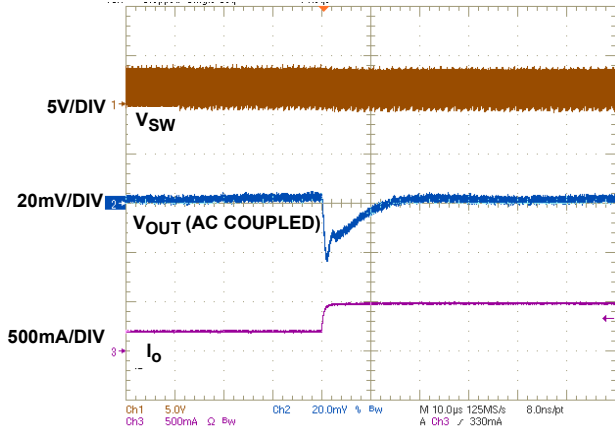


FIGURE 19. LOAD TRANSIENT IN PWM MODE ($V_{IN} = 3.6V$, $V_O = 1.5V$, 200mA TO 500mA)

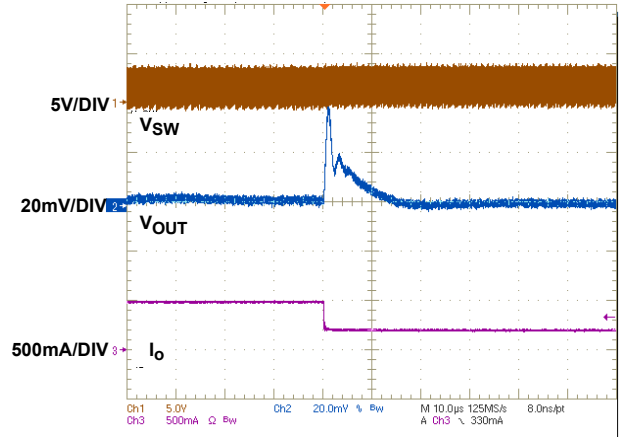


FIGURE 20. LOAD TRANSIENT IN PWM MODE ($V_{IN} = 3.6V$, $V_O = 1.5V$, 500mA TO 200mA)

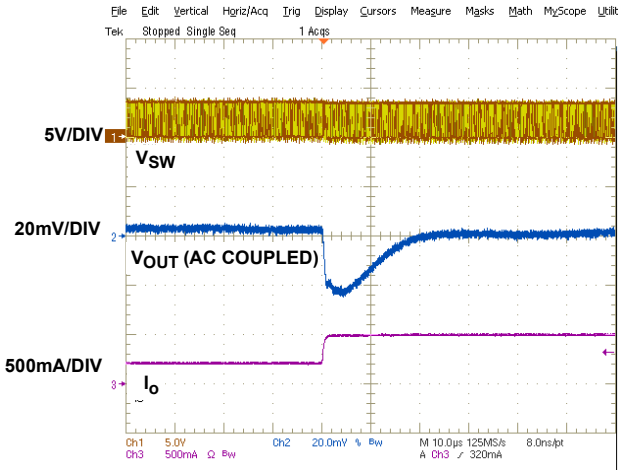


FIGURE 21. LOAD TRANSIENT IN PWM MODE ($V_{IN} = 3.6V$, $V_O = 2.5V$, 200mA TO 500mA)

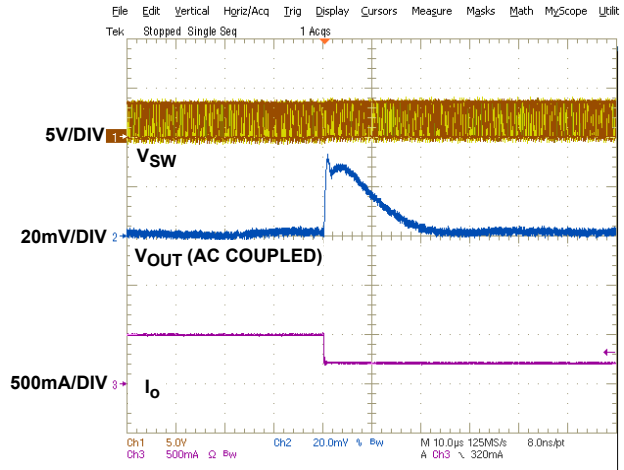


FIGURE 22. LOAD TRANSIENT IN PWM MODE ($V_{IN} = 3.6V$, $V_O = 2.5V$, 500mA TO 200mA)

The PWM operation is initialized by the clock from the oscillator. The P-Channel MOSFET is turned on at the beginning of a PWM cycle and the current in the P-Channel MOSFET starts ramping up. When the sum of the CSA output and the compensation slope reaches the control reference of the current loop, the PWM comparator COMP sends a signal to the PWM logic to turn off the P-Channel MOSFET and to turn on the N-Channel MOSFET. The N-MOSFET remains on till the end of the PWM cycle. Figure 24 shows the typical operating waveforms during the normal PWM operation. The dotted lines illustrate the sum of the slope compensation ramp and the CSA output.

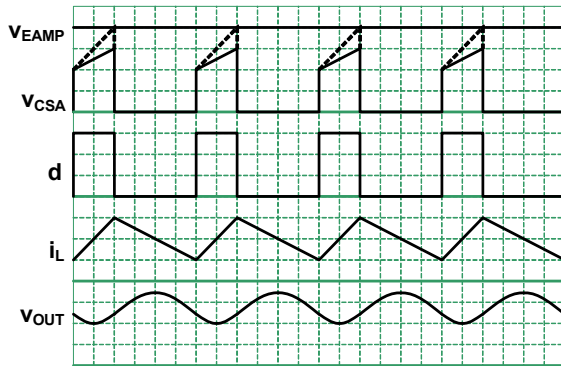


FIGURE 24. PWM OPERATION WAVEFORMS

The output voltage is regulated by controlling the reference voltage to the current loop. The bandgap circuit outputs a 0.8V reference voltage to the voltage control loop. The feedback signal comes from the FB pin. The soft-start block only affects the operation during the start-up and will be discussed separately in “Soft-Start” on page 11. The EAMP is a transconductance amplifier, which converts the voltage error signal to a current output. The voltage loop is internally compensated by a RC network. The maximum EAMP voltage output is precisely clamped to the bandgap voltage.

Skip Mode (PFM Mode)

Under light load condition, ISL9104, ISL9104A automatically enters a pulse-skipping mode to minimize the switching loss by reducing the switching frequency. Figure 25 illustrates the skip mode operation. A zero-cross sensing circuit (as shown in Figure 23) monitors the current flowing through SW node for zero crossing. When it is detected to cross zero for 16-consecutive cycles, the regulator enters the skip mode. During the 16-consecutive cycles, the inductor current could be negative. The counter is reset to zero when the sensed current flowing through SW node does not cross zero during any cycle within the 16-consecutive cycles. Once ISL9104, ISL9104A enters the skip mode, the pulse modulation starts being controlled by the SKIP comparator shown in Figure 23. Each pulse cycle is still synchronized by the PWM clock. The P-Channel MOSFET is turned on at the rising edge of clock and turned off when its current reaches ~20% of the peak current limit. As the average inductor current in each cycle is higher than the average current of the load, the output voltage rises cycle over cycle. When the output voltage is sensed to reach 1.5% above its nominal voltage, the P-Channel MOSFET is turned off immediately and the inductor current is fully discharged to zero and stays at zero. The output voltage reduces gradually due to the load current discharging the output capacitor. When the output voltage drops to the nominal voltage, the P-Channel MOSFET will be turned on again, repeating the previous operations.

The regulator resumes normal PWM mode operation when the output voltage is sensed to drop below 1.5% of its nominal voltage value.

Enable

The enable (EN) pin allows user to enable or disable the converter for purposes such as power-up sequencing. With EN pin pulled to high, the converter is enabled and the internal reference circuit wakes up first and then the soft start-up begins. When EN pin is pulled to logic low, the converter is disabled, both P-Channel MOSFET and N-Channel MOSFETS are turned off, and the output capacitor is discharged through internal discharge path.

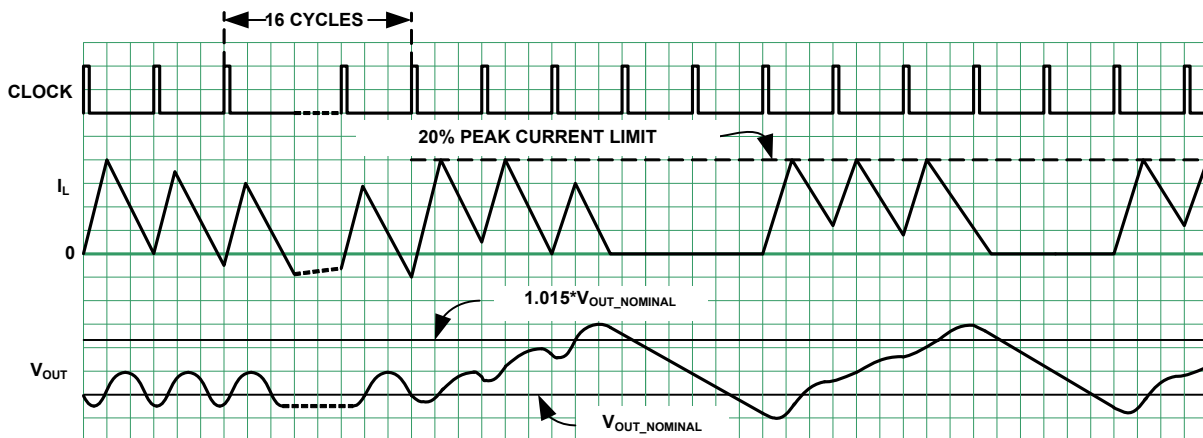


FIGURE 25. SKIP MODE OPERATION WAVEFORMS

Overcurrent Protection

The overcurrent protection is provided on ISL9104, ISL9104A when overload condition happens. It is realized by monitoring the CSA output with the OCP comparator, as shown in Figure 23 on page 9. When the current at P-Channel MOSFET is sensed to reach the current limit, the OCP comparator is triggered to turn off the P-Channel MOSFET immediately.

Short-Circuit Protection

ISL9104, ISL9104A has a Short-Circuit Protection (SCP) comparator, which monitors the FB pin voltage for output short-circuit protection. When the output voltage is sensed to be lower than a certain threshold, the SCP comparator reduces the PWM oscillator frequency to a much lower frequency to protect the IC from being damaged.

Undervoltage Lockout (UVLO)

When the input voltage is below the Undervoltage Lock Out (UVLO) threshold, ISL9104, ISL9104A is disabled.

Soft-Start

The soft-start feature eliminates the in-rush current during the circuit start-up. The soft-start block outputs a ramp reference to both the voltage loop and the current loop. The two ramps limit the inductor current rising speed as well as the output voltage speed so that the output voltage rises in a controlled fashion.

Low Dropout Operation

The ISL9104, ISL9104A features low dropout operation to maximize the battery life. When the input voltage drops to a level that ISL9104, ISL9104A can no longer operate under switching regulation to maintain the output voltage, the P-Channel MOSFET is completely turned on (100% duty cycle). The dropout voltage under such condition is the product of the load current and the ON-resistance of the P-Channel MOSFET. Minimum required input voltage V_{IN} under this condition is the sum of output voltage plus the voltage drop across the inductor and the P-Channel MOSFET switch.

Thermal Shut Down

The ISL9104, ISL9104A provides built-in thermal protection function. The thermal shutdown threshold temperature is +130°C (typ) with a 30°C (typ) hysteresis. When the internal temperature is sensed to reach +130°C, the regulator is completely shut down and as the temperature drops to +100°C (typ), the ISL9104, ISL9104A resumes operation starting from the soft-start.

Applications Information

Inductor and Output Capacitor Selection

To achieve better steady state and transient response, ISL9104, ISL9104A typically uses a 1.0μH inductor. The peak-to-peak inductor current ripple can be expressed in Equation 1:

$$\Delta I = \frac{V_O \cdot \left(1 - \frac{V_O}{V_{IN}}\right)}{L \cdot f_S} \quad (\text{EQ. 1})$$

In Equation 1, usually the typical values can be used but to have a more conservative estimation, the inductance should consider the value with worst case tolerance; and for switching frequency f_S , the minimum f_S from the “Electrical Specifications” table on page 4 can be used.

To select the inductor, its saturation current rating should be at least higher than the sum of the maximum output current and half of the delta calculated from Equation 1. Another more conservative approach is to select the inductor with the current rating higher than the P-Channel MOSFET peak current limit.

Another consideration is the inductor DC resistance since it directly affects the efficiency of the converter. Ideally, the inductor with the lower DC resistance should be considered to achieve higher efficiency.

Inductor specifications could be different from different manufacturers so please check with each manufacturer if additional information is needed.

For the output capacitor, a ceramic capacitor can be used because of the low ESR values, which helps to minimize the output voltage ripple. A typical value of 4.7μF/6.3V ceramic capacitor should be enough for most of the applications and the capacitor should be X5R or X7R.

Input Capacitor Selection

The main function for the input capacitor is to provide decoupling of the parasitic inductance and to provide filtering function to prevent the switching current from flowing back to the battery rail. A 4.7μF/6.3V ceramic capacitor (X5R or X7R) is a good starting point for the input capacitor selection.

Output Voltage Setting Resistor Selection

For ISL9104, ISL9104A adjustable output option, the voltage resistors, R_1 and R_2 , as shown in Figure 2, set the desired output voltage values. The output voltage can be calculated using Equation 2:

$$V_O = V_{FB} \cdot \left(1 + \frac{R_1}{R_2}\right) \quad (\text{EQ. 2})$$

where V_{FB} is the feedback voltage (typically it is 0.8V). The current flowing through the voltage divider resistors can be calculated as $V_O/(R_1 + R_2)$, so larger resistance is desirable to minimize this current. On the other hand, the FB pin has leakage current that will cause error in the output voltage setting. The leakage current has a typical value of 0.1μA. To minimize the accuracy impact on the output voltage, select the R_2 no larger than 200kΩ.

For adjustable output versions, C3 (shown in Figure 2 on page 2) is highly recommended for improving stability and achieving better transient response.

Table 1 provides the recommended component values for some output voltage options.

TABLE 1. RECOMMENDED ISL9104, ISL9104A ADJUSTABLE OUTPUT VERSION CIRCUIT CONFIGURATION vs V_{OUT}

| V _{OUT} (V) | L (μH) | C ₂ (μF) | R ₁ (kΩ) | C ₃ (pF) | R ₂ (kΩ) |
|----------------------|--------|---------------------|---------------------|---------------------|---------------------|
| 0.8 | 1.0 | 4.7 | 0 | N/A | N/A |
| 1.0 | 1.0 | 4.7 | 44.2 | 100 | 178 |
| 1.2 | 1.0 | 4.7 | 80.6 | 47 | 162 |
| 1.5 | 1.0 | 4.7 | 84.5 | 47 | 97.6 |
| 1.8 | 1.0 | 4.7 | 100 | 47 | 80.6 |
| 2.5 | 1.0 | 4.7 | 100 | 47 | 47.5 |
| 2.8 | 1.0 | 4.7 | 100 | 47 | 40.2 |
| 3.3 | 1.0 | 4.7 | 102 | 47 | 32.4 |

Layout Recommendation

The PCB layout is a very important converter design step to make sure the designed converter works well, especially under the high current high switching frequency condition.

For ISL9104, ISL9104A, the power loop is composed of the output inductor L, the output capacitor C_{OUT}, the SW pin and the PGND pin. It is necessary to make the power loop as small as possible and the connecting traces among them should be direct, short and wide; the same type of traces should be used to connect the VIN pin, the input capacitor C_{IN} and its ground.

The switching node of the converter, the SW pin, and the traces connected to this node are very noisy, so keep the voltage feedback trace and other noise sensitive traces away from these noisy traces.

The input capacitor should be placed as close as possible to the VIN pin. The ground of the input and output capacitors should be connected as close as possible as well. In addition, a solid ground plane is helpful for EMI performance.

Revision History

The revision history provided is for informational purposes only and is believed to be accurate, but not warranted. Please go to web to make sure you have the latest revision.

| DATE | REVISION | CHANGE |
|------------|----------|---|
| 04/08/2011 | FN6829.5 | Converted to new Intersil Template Added Efficiency Curve to page 1. Added Related Literature to page 1. Updated Ordering Information with Eval Boards. Added Rev History and Products information. |
| 11/24/2009 | FN6829.4 | Updated ordering information by removing coming soon from parts with Voltage Output of 2.8V, 2.0V and 1.8V and added MSL note. Updated Electrical Spec conditions by adding Boldface limit text and bolding MIN and MAX columns. Removed over-temp note from conditions in Electrical spec and placed at end of table as note. Placed pinout descriptions in a table and placed after pinout. |
| 07/09/2009 | FN6829.3 | Changed P-Channel MOSFET Peak Current Limit Max Value from "1.25A" to "1.35A". |
| 06/24/2009 | FN6829.2 | Removed coming soon in ordering information from parts ISL9104IRUWZ-T and ISL9104AIRUWZ-T. Updated Voltage option Note in ordering information to match verbiage that is in ISL9103, ISL9103A. Test condition for P-Channel MOSFET Peak Current Limit updated from "VIN = 3.6" to "VIN = 4.2V" |
| 05/29/2009 | FN6829.1 | Added to conditions of SW Leakage Current - "SW at Hi-Z state". |
| 12/23/2008 | FN6829.0 | Initial Release |

Products

Intersil Corporation is a leader in the design and manufacture of high-performance analog semiconductors. The Company's products address some of the industry's fastest growing markets, such as, flat panel displays, cell phones, handheld products, and notebooks. Intersil's product families address power management and analog signal processing functions. Go to www.intersil.com/products for a complete list of Intersil product families.

For a complete listing of Applications, Related Documentation and Related Parts, please see the respective device information page on intersil.com: [ISL9104](http://www.intersil.com/products), [ISL9104A](http://www.intersil.com/products)

To report errors or suggestions for this datasheet, please go to: www.intersil.com/askourstaff

FITs are available from our website at: <http://rel.intersil.com/reports/search.php>

© Copyright Intersil Americas LLC 2008-2011. All Rights Reserved.
All trademarks and registered trademarks are the property of their respective owners.

For additional products, see www.intersil.com/en/products.html

Intersil products are manufactured, assembled and tested utilizing ISO9001 quality systems as noted in the quality certifications found at www.intersil.com/en/support/qualandreliability.html

Intersil products are sold by description only. Intersil may modify the circuit design and/or specifications of products at any time without notice, provided that such modification does not, in Intersil's sole judgment, affect the form, fit or function of the product. Accordingly, the reader is cautioned to verify that datasheets are current before placing orders. Information furnished by Intersil is believed to be accurate and reliable. However, no responsibility is assumed by Intersil or its subsidiaries for its use; nor for any infringements of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Intersil or its subsidiaries.





For information regarding Intersil Corporation and its products, see www.intersil.com

Package Outline Drawing

L6.1.6x1.6

6 LEAD ULTRA THIN DUAL FLAT NO-LEAD COL PLASTIC PACKAGE (UTDFN COL)

Rev 1, 11/07

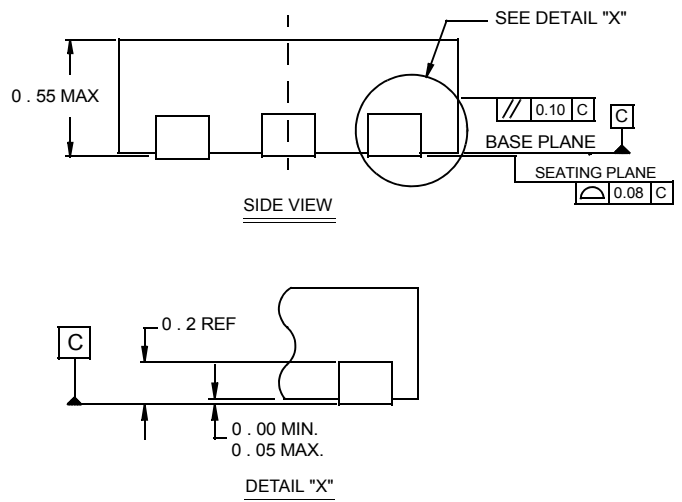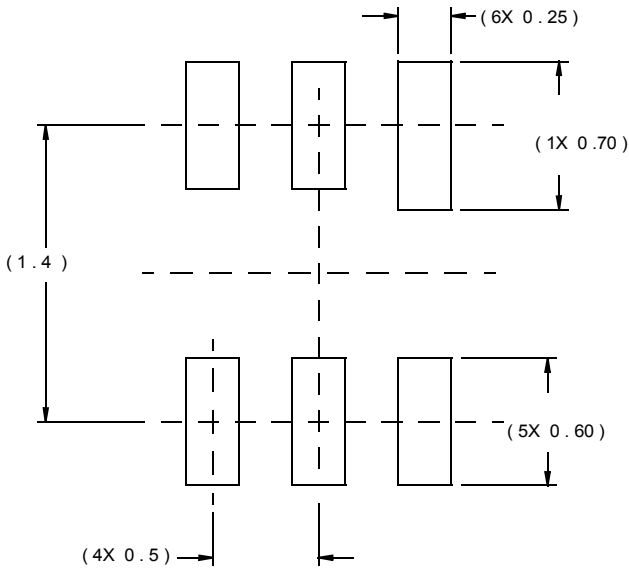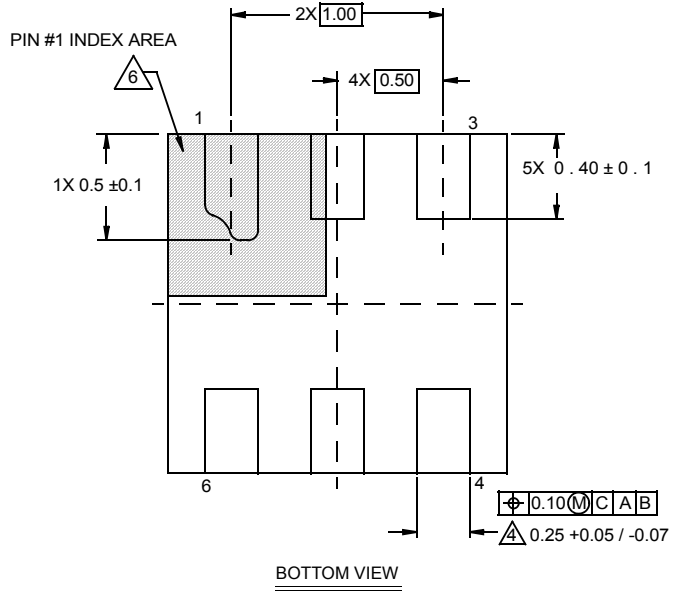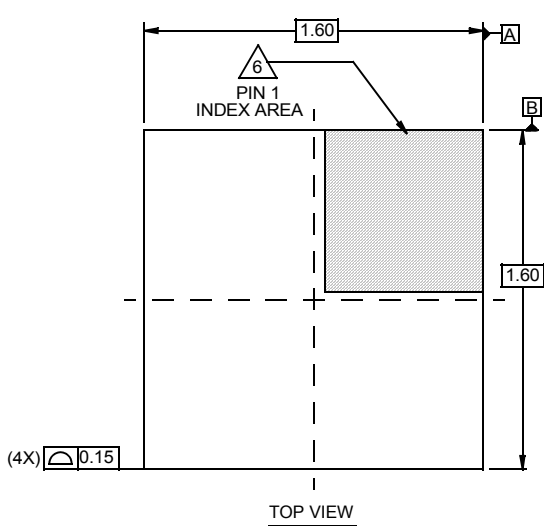

NOTES:

1. Dimensions are in millimeters.
Dimensions in () for Reference Only.
2. Dimensioning and tolerancing conform to AMSE Y14.5m-1994.
3. Unless otherwise specified, tolerance : Decimal ± 0.05
4. Dimension b applies to the metallized terminal and is measured between 0.15mm and 0.30mm from the terminal tip.
5. Tiebar shown (if present) is a non-functional feature.
6. The configuration of the pin #1 identifier is optional, but must be located within the zone indicated. The pin #1 identifier may be either a mold or mark feature.

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View ISL9104IRUNZ-T on WIN SOURCE](#)
-  [Renesas Electronics America](#) Information

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management