



THE DATASHEET OF
2180BL08-U



Chip Inductors for RF Applications / Medical Applications (Wire wound-open)

FASTRON's wire wound chip inductors are designed for radio frequency (RF) applications that require optimal Q on high frequency circuits. Its gold flash pad metallization provides better solderability for a higher yield in production. Additionally, their encapsulation not only protects the winding but also allows for surface mount assembly. It comes in compact sizes (from 0402 to 1812) and is available in reel packaging. Unlisted inductance values are usually available upon request. Ferrite core versions are also available for selected case sizes for applications which require higher inductances in a smaller case size.

Applications Used in LC resonant circuits such as oscillator and signal generators, impedance matching, RF filters etc.
 Mobile Telecommunication: GSM, CDMA, TCDMA, cordless phones, 2 way radio
 Automotive Subsystems: TPMS, Keyless Entry, Anti-Theft, GPS
 Wireless Communication: W-LAN, WIFI, WIMAX, RFID, Bluetooth
 Non-magnetic versions for medical imaging applications: ASM series

Technical Data

| | |
|---|---|
| L – Value (Rated Inductance) | ≥ 1 MHz measured with HP 4286A RF LCR meter or equivalent at frequency f_L , 25°C ambient < 1 MHz measured with HP 4285A or equivalent at frequency f_L , 25°C ambient |
| Q – Factor (min) | ≥ 1 MHz measured with E4991B Impedance Analyzer or equivalent at frequency f_Q , 25°C ambient < 1 MHz measured with HP 4285A or equivalent at frequency f_Q , 25°C ambient |
| SRF (min) | Measured with HP8753ES Network Analyzer or equivalent at 25°C ambient |
| DCR (max) | Measured at 25°C ambient |
| Rated DC Current: Irms | Max permissible current that causes a 15°C component temperature rise from 25°C ambient for AS, AQ, ASM & F Max permissible current that causes a 40°C component temperature rise from 25°C ambient for AQC & FLP |
| Saturation Current: Isat | Max permissible DC bias at 25°C ambient that causes inductivity drop 30% (typ.) related to the unloaded inductivity for FLP. |
| Operating Temperature | -40°C to +100°C (Including component self-heating): F -40°C to +125°C (Including component self-heating): FLP -40°C to +140°C (Including component self-heating): AS, AQ, ASM & AQC |
| Surface Finishing | Epoxy molded flat top for perfect pick and place assembly |
| Pad Metallization | Gold flash as top layer for AS, AQ, F & AF Silver-Palladium-Platinum for ASM & AQC Tin as top layer for FLP |
| Wire Termination | Spot welding |
| Recommended Soldering Method | Reflow |
| Moisture Sensitivity Levels (MSL) | MSL Level 1, indicating unlimited floor life at ≤ 30°C / 85% relative humidity |
| Solderability | Using lead free solder (Sn 99.9) at 260°C ± 5°C for 5 ± 0.5 seconds, min 90% solder coverage of metallization Standard: IEC 68-2-20 (Ta) |
| Resistance to Soldering Heat | Resistant to 260°C ± 5°C for 10 ± 1 seconds Standard: IEC 68-2-20 (Tb) |
| Resistance to Solvent | Resistant to isopropyl alcohol for 5 ± 0.5 minutes at 23°C ± 5°C Standard: IEC 68-2-45 |
| Climatic Test | Defined by the following standards IEC 68-2-1 for Cold test: -55°C for 96 hours IEC 68-2-2 for Dry heat test: +85°C for ferrite core and 125°C for ceramic core for 96 hours IEC 60068-2-78 for Humidity test: 40°C at RH 95% for 4 days |
| Thermal Shock Test | Temperature cycle (ceramic): -40°C to +125°C to -40°C Temperature cycle (ferrite): -40°C to +85°C to -40°C Max/Min temperature duration: 15 minutes Temperature transition duration: 5 minutes Cycles: 25 Standard: MIL-STD-202G |
| Adhesion of Soldered Component (Shear Test) | Components withstand a pushing force of 10N for 10 ± 1 seconds Standard: IEC 60068-2-21, method Ue3 |
| Mechanical Shock | Mil-Std 202 Method 213, Condition C 3 axis, 6 times, total 18 shocks 100 G, 6 ms, half-sine |
| Vibration | Mil-Std 202 Method 204 20 mins at 5G 10 Hz to 2000 Hz 12 cycles each of 3 orientations |

Chip Inductors for RF Applications / Medical Applications (Wire wound-open)

Ordering Code Example : 0402AS-1N0X-YY → **0402AS-1N0K-01**

0402 AS - 1N0 X - YY
(Case Size) (Core Type) (Inductance Value) (Tolerance) (Packaging Code)




Case Sizes - 0402, 0603, 0805, 1008, 1206, 1210, 1812

Core Type - AS, AQ, AQC, ASM (Ceramic), F (Ferrite), AF (Ceramic & Ferrite), FLP (Ferrite Low Profile)

Tolerances - F (1%), G (2%), A (3%), J (5%), K (10%), L (15%), M (20%)

Packaging Code - 01, 04, 08 (Taped / Reel)

Packaging Specification Schematic

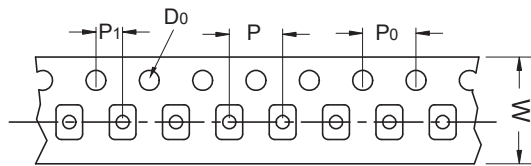

| Type | Packaging Code | D | D0 | d | d1 | B | b | W | P | P0 | P1 | K0 | T | Fig |
|------|----------------|-----|------|-----|----|------|------|----|---|----|----|------|------|-----|
| 0402 | 01,08 | 180 | 1.55 | 60 | 13 | 11.9 | 9.5 | 8 | 2 | 4 | 2 | 0.60 | - | 2 |
| 0603 | 01,08 | 180 | 1.55 | 60 | 13 | 11.4 | 9.0 | 8 | 4 | 4 | 2 | 0.98 | - | 2 |
| 0603 | 04 | 330 | 1.55 | 100 | 13 | 14.4 | 8.4 | 8 | 4 | 4 | 2 | 0.98 | - | 2 |
| 0805 | 01,08 | 180 | 1.55 | 60 | 13 | 11.4 | 9.0 | 8 | 4 | 4 | 2 | 1.63 | 0.25 | 1 |
| 0805 | 04 | 330 | 1.55 | 100 | 13 | 14.4 | 8.4 | 8 | 4 | 4 | 2 | 1.63 | 0.25 | 1 |
| 1008 | 01,08 | 180 | 1.50 | 60 | 13 | 11.4 | 9.5 | 8 | 4 | 4 | 2 | 2.23 | 0.30 | 1 |
| 1008 | 04 | 330 | 1.55 | 100 | 13 | 14.4 | 8.4 | 8 | 4 | 4 | 2 | 1.63 | 0.25 | 1 |
| 1206 | 01,08 | 180 | 1.50 | 60 | 13 | 18.4 | 13.7 | 12 | 4 | 4 | 2 | 1.80 | 0.30 | 1 |
| 1206 | 04 | 330 | 1.50 | 100 | 13 | 18.4 | 12.4 | 12 | 4 | 4 | 2 | 1.80 | 0.30 | 1 |
| 1210 | 01 | 180 | 1.55 | 60 | 13 | 18.4 | 13.7 | 12 | 8 | 4 | 2 | 2.55 | 0.30 | 1 |
| 1210 | 04 | 330 | 1.55 | 100 | 13 | 18.4 | 12.4 | 12 | 8 | 4 | 2 | 2.55 | 0.30 | 1 |
| 1812 | 01 | 180 | 1.50 | 60 | 13 | 18.4 | 13.7 | 12 | 8 | 4 | 2 | 3.70 | 0.35 | 1 |
| 1812 | 04 | 330 | 1.50 | 100 | 13 | 18.4 | 12.4 | 12 | 8 | 4 | 2 | 3.70 | 0.35 | 1 |

FASTRON's Component Key Characteristics



Approved according to AEC-Q200



Approved according to AEC-Q200 with High Temperature



Suitable for High Temperature



Part is RoHS conform and Halogen free



Mechanical Shock and Vibration Proof




Designed for High Q-values



Exceptionally High Q-values





Optimized for High Currents



Optimized for High Voltages



1210 AS

Engineer's Kit: EK-1210AS-X

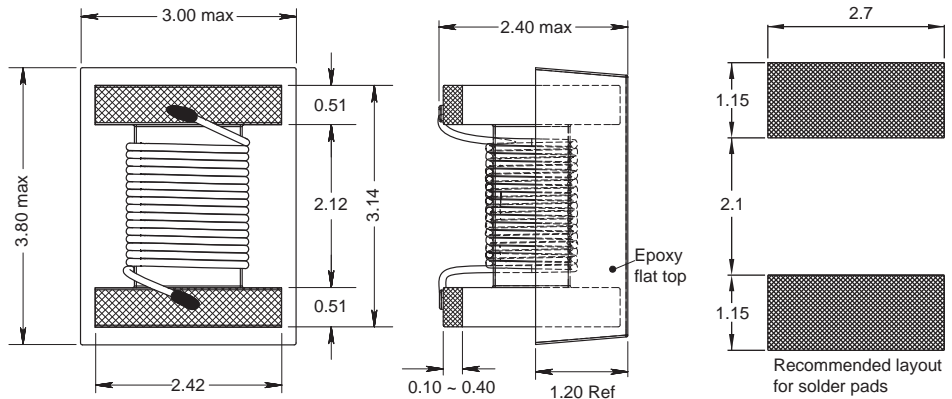

(Wire wound - open)

Chip Inductors for RF Applications

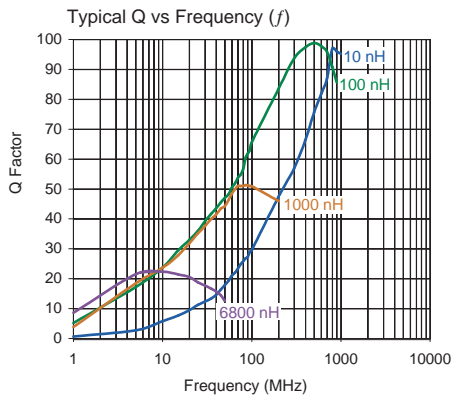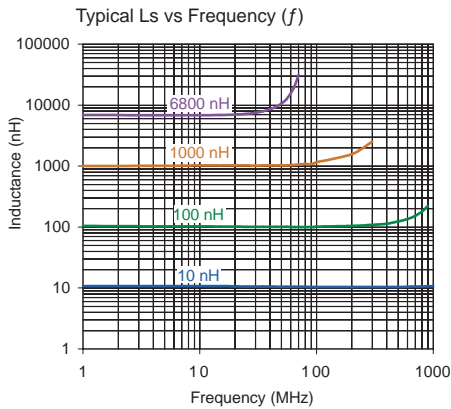

Single layer (typ)

| Part No | Inductance | f _L | Tol | Q | f _a | SRF | DCR | Rated DC |
|----------------|------------|----------------|-------|-----|----------------|----------|---------|------------------|
| | L (nH) | (MHz) | ± (%) | min | (MHz) | (MHz) | max (Ω) | Current max (mA) |
| 1210AS-010K-YY | 10 | 50 | 10 | 50 | 500 | 4100 min | 0.08 | 1000 |
| 1210AS-012K-YY | 12 | 50 | 10 | 50 | 500 | 2400 min | 0.09 | 1000 |
| 1210AS-015K-YY | 15 | 50 | 10 | 50 | 500 | 2400 min | 0.10 | 1000 |
| 1210AS-018K-YY | 18 | 50 | 10 | 50 | 350 | 2400 min | 0.11 | 1000 |
| 1210AS-022K-YY | 22 | 50 | 10 | 55 | 350 | 2400 min | 0.12 | 1000 |
| 1210AS-027J-YY | 27 | 50 | 5 | 55 | 350 | 1800 min | 0.13 | 1000 |
| 1210AS-033J-YY | 33 | 50 | 5 | 60 | 350 | 1600 min | 0.14 | 1000 |
| 1210AS-039J-YY | 39 | 50 | 5 | 60 | 350 | 1500 min | 0.15 | 1000 |
| 1210AS-047J-YY | 47 | 50 | 5 | 65 | 350 | 1200 min | 0.16 | 1000 |
| 1210AS-056J-YY | 56 | 50 | 5 | 65 | 350 | 1200 min | 0.16 | 1000 |
| 1210AS-068J-YY | 68 | 50 | 5 | 65 | 350 | 1000 min | 0.20 | 1000 |
| 1210AS-082J-YY | 82 | 50 | 5 | 60 | 350 | 1000 min | 0.22 | 1000 |
| 1210AS-R10J-YY | 100 | 25 | 5 | 60 | 350 | 1000 min | 0.24 | 980 |
| 1210AS-R12J-YY | 120 | 25 | 5 | 60 | 350 | 850 min | 0.26 | 920 |
| 1210AS-R15J-YY | 150 | 25 | 5 | 50 | 100 | 750 min | 0.29 | 870 |
| 1210AS-R18J-YY | 180 | 25 | 5 | 50 | 100 | 700 min | 0.31 | 830 |
| 1210AS-R22J-YY | 220 | 25 | 5 | 50 | 100 | 650 min | 0.35 | 790 |
| 1210AS-R27J-YY | 270 | 25 | 5 | 45 | 100 | 600 min | 0.42 | 730 |
| 1210AS-R33J-YY | 330 | 25 | 5 | 45 | 100 | 500 min | 0.49 | 680 |
| 1210AS-R37J-YY | 370 | 25 | 5 | 45 | 100 | 500 min | 0.52 | 610 |
| 1210AS-R39J-YY | 390 | 25 | 5 | 45 | 100 | 500 min | 0.54 | 640 |
| 1210AS-R47J-YY | 470 | 25 | 5 | 45 | 100 | 450 min | 0.60 | 610 |
| 1210AS-R56J-YY | 560 | 25 | 5 | 45 | 100 | 415 min | 1.00 | 460 |
| 1210AS-R68J-YY | 680 | 25 | 5 | 45 | 100 | 350 min | 1.15 | 420 |
| 1210AS-R82J-YY | 820 | 25 | 5 | 45 | 100 | 350 min | 1.93 | 350 |
| 1210AS-1R0K-YY | 1000 | 25 | 10 | 35 | 50 | 290 typ | 2.16 | 330 |
| 1210AS-1R2K-YY | 1200 | 7.9 | 10 | 35 | 50 | 250 typ | 2.38 | 310 |
| 1210AS-1R5K-YY | 1500 | 7.9 | 10 | 25 | 50 | 200 typ | 2.64 | 300 |
| 1210AS-1R8K-YY | 1800 | 7.9 | 10 | 25 | 50 | 160 typ | 2.76 | 290 |
| 1210AS-2R2K-YY | 2200 | 7.9 | 10 | 25 | 50 | 160 typ | 2.98 | 280 |
| 1210AS-2R7K-YY | 2700 | 7.9 | 10 | 25 | 25 | 140 typ | 3.30 | 260 |
| 1210AS-3R3K-YY | 3300 | 7.9 | 10 | 25 | 25 | 120 typ | 3.66 | 250 |
| 1210AS-3R9K-YY | 3900 | 7.9 | 10 | 20 | 25 | 100 typ | 4.00 | 240 |
| 1210AS-4R7K-YY | 4700 | 7.9 | 10 | 20 | 25 | 90 typ | 4.30 | 230 |
| 1210AS-5R6K-YY | 5600 | 7.9 | 10 | 15 | 25 | 60 typ | 4.30 | 230 |
| 1210AS-6R8K-YY | 6800 | 7.9 | 10 | 15 | 25 | 60 typ | 5.20 | 210 |
| 1210AS-8R2K-YY | 8200 | 7.9 | 10 | 17 | 7.9 | 45 typ | 5.90 | 168 |
| 1210AS-100K-YY | 10000 | 7.9 | 10 | 17 | 7.9 | 38 typ | 6.00 | 160 |
| 1210AS-150K-YY | 15000 | 7.9 | 10 | 15 | 7.9 | 20 typ | 7.00 | 120 |

Core Material: Ceramic

Revision date: 11 Jan 2022

SPQ: Taped / Reel 800 [-01]
3000 [-04]

Remarks: - Unlisted inductance values available upon request.
- 2% and 5% tolerance available upon request.

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View 2180BL08-U on WIN SOURCE](#)

 [THAT Corporation](#) Information

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management