



# THE DATASHEET OF ALC4020





**CONFIDENTIAL & PROPRIETARY INFORMATION**  
 This document contains Confidential and Proprietary Information of Alliance LLC, and all design, manufacturing, reproduction, use, and sale rights of such information are expressly reserved

ALL DIM

M

2.00 ± .12

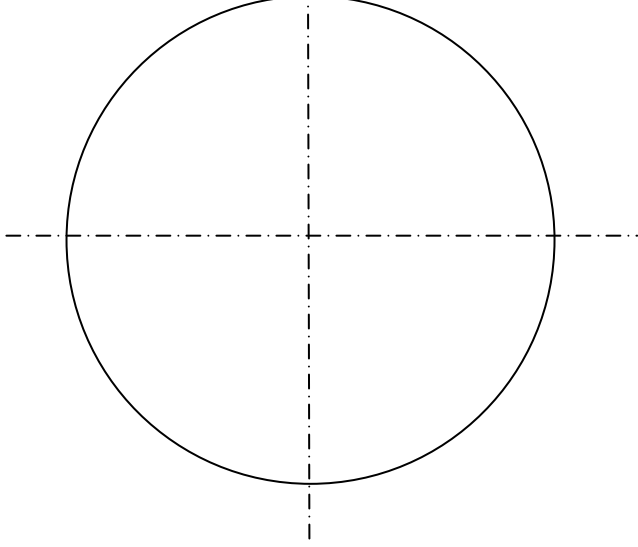

**NOTES:**

- MAGNET PROPERTIES PER N-40SH:

Br: 12,600-12,900 G  
 Hc: 11,500-12,200 Oe  
 Hci: ≥20,000 Oe  
 Tmax: 150 C

- SUPPLIED MAGNETIZED THROUGH THE THICKNESS

- PARTS ARE NICKEL PLATED FOR 15hrs SALT SPRAY MIN.





TOLERANCES (UNLESS OTHERWISE NOTED)	
DECIMAL	METRIC
X.XX = ± .01	X.X = ± .25
X.XXX = ± .005	X.XX = ± .13
ANGLES ± .5°	
DO NOT SCALE DRAWING	

REV	DESCRIPTION	DATE	BY
B	Changed CAD, incl cert, 3D	1/30/14	BT

<b>Alli:</b> 1450 CLARK DRIVE, \	DESCRIPTION: 4.0 r
<b>SENSOR MAGN:</b>	GRADE: N-40SH
	COATING: Nickel

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View ALC4020 on WIN SOURCE](#)
-  [Alliance Memory, Inc. Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management