





ELECTRONICS, INC.  
 44 FARRAND STREET  
 BLOOMFIELD, NJ 07003  
 (973) 748-5089  
<http://www.nteinc.com>

## NTE116 General Purpose Silicon Rectifier DO-41 Type Package

### **Description:**


The NTE116 is a general purpose silicon rectifier in a DO-41 case designed for low power and switching applications.

### **Absolute Maximum Ratings:**

Peak Repetitive Reverse Voltage, $V_{RRM}$ .....	600V
Working Peak Reverse Voltage, $V_{RWM}$ .....	600V
DC Blocking Voltage, $V_R$ .....	600V
Non-Repertive Peak Reverse Voltage (Halfwave, Single Phase, 60Hz), $V_{RSM}$ .....	720V
RMS Reverse Voltage, $V_{R(RMS)}$ .....	420V
Average Rectified Forward Current, $I_O$ (Single Phase, Resistive Load, 60Hz, $T_A = +75^\circ\text{C}$ ) .....	1A
Non-Repertive Peak Surge Current, $I_{FSM}$ (Surge applied at rated load conditions for 1 cycle) .....	30A
Operating Junction Temperature Range, $T_J$ .....	-65° to +175°C
Storage Temperature Range, $T_{stg}$ .....	-65° to +175°C
Maximum Lead Temperature, $T_L$ (During Soldering, 3/8" from case for 10sec at 5lbs tension) .....	+350°C

### **Electrical Characteristics:**


Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Maximum Instantaneous Forward Voltage Drop	$v_F$	$i_F = 1A, T_J = +25^\circ\text{C}$	-	0.93	1.1	V
Maximum Full-Cycle Average Forward Voltage Drop	$V_{F(AV)}$	$I_O = 1A, T_L +75^\circ\text{C}, 1''$ leads	-	-	0.8	V
Maximum Reverse Current	$I_R$	$V_{RRM} = 600V, T_J = +25^\circ\text{C}$	-	0.05	10	$\mu\text{A}$
		$V_{RRM} = 600V, T_J = +100^\circ\text{C}$	-	1.0	50	
Maximum Full-Cycle Average Reverse Current	$I_{R(AV)}$	$I_O = 1A, T_L +75^\circ\text{C}, 1''$ leads	-	-	30	$\mu\text{A}$

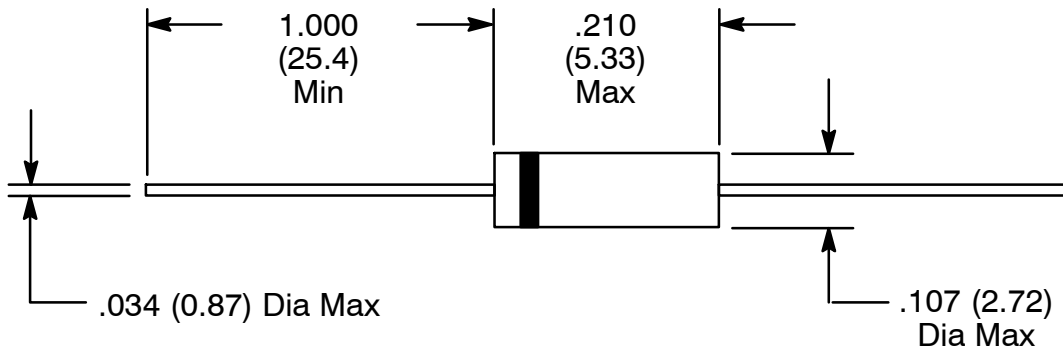

Color Band Denotes Cathode

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View NTE116 on WIN SOURCE](#)

 [NTE Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management