




# THE DATASHEET OF R9000-SKID



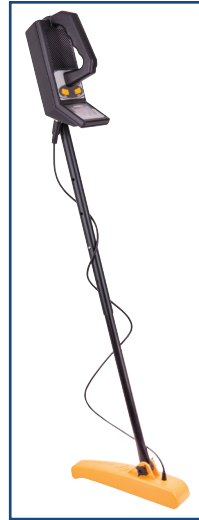

R9000-RCV

### Features

- Complete video inspection system built in a hard carrying case
- Camera and video functions save high resolution images and records video/audio
- Twelve high visibility LED lights provide illumination in dimly lit environments
- Scratch-resistant sapphire lens and durable stainless steel camera housing
- 65.6ft (20m) cable mounted on cable reel
- High resolution 16:9 7" TFT LCD display
- Video and audio output
- Rechargeable lithium-ion battery and car charger
- Sun visor is included to act as a sun shield for outdoor inspections
- 90° mirror rotation and low battery indicator
- Includes camera head, 20m cable reel and push cable, remote control, hard carrying case with built-in DVR, battery pack and cable, car charger, fuse, 2 ball guides, plastic skid, 2 screws, 2 nuts, waterproof ring and adapters and screwdriver



R9000-RCH



R9000-20M



R9000-40M



R9000-CAMT

### TECHNICAL DATA

#### Specifications

##### Camera

|                        |                            |
|------------------------|----------------------------|
| Camera Resolution:     | 800 x 480                  |
| Camera Diameter:       | 0.91" (23mm)               |
| Camera Length:         | 4.7" (120mm)               |
| Lens/Housing Material: | Sapphire / Stainless Steel |
| Viewing Distance:      | 7.9 to 39.4" (20 to 100cm) |
| Depth of Field:        | 100cm to infinity          |
| Viewing Angle:         | 0 to 140°                  |

##### General Specifications

|                          |                         |
|--------------------------|-------------------------|
| Display:                 | 7" Color TFT LCD (16x9) |
| Display Resolution:      | 800 x 480               |
| Frames per Second (FPS): | 30                      |
| Standard Gooseneck/      |                         |



|                            |  |
|----------------------------|--|
| Cable Length:              | 65.6' (20m)  |
| Cable Diameter:            | 0.2" (5.2mm)   |
| Rotate Display:            | Yes (90°)  |
| Playback:                  | Photo, Video and Audio                               |
| Memory:                    | Internal / SD Card                                   |
| TV Out:                    | PAL / NTSC   |
| Data Output:               | USB / SD Card  |
| LED Brightness Adjustment: | Yes (12 white LEDs)                                  |
| Low Battery Indicator:     | Yes  |
| Power Supply:              | Rechargeable Li-ion Battery, AC Adapter, Car Charger |

|                         |   |
|-------------------------|---|
| Supported Languages:    | English, German, French, Spanish, Italian, Chinese, Japanese, Russian, Portuguese |
| Product Certifications: | CE, IP67 (Camera Head)  |
| Operating Temperature:  | 14 to 122°F (-10 to 50°C)   |
| Storage Temperature:    | 4 to 140°F (-20 to 60°C)  |
| Operating Humidity:     | 30 to 90%   |
| Dimensions:             | 22.7 x 10.4 x 20.4" (575 x 265 x 520 mm)  |
| Weight:                 | 22lbs (10kg)  |

| Model      | Description                         |
|------------|-------------------------------------|
| R9000      | Video Inspection Camera System      |
| R9000-RCH  | Replacement Camera Head             |
| R9000-20M  | Cable, 65.6' (20m)                  |
| R9000-40M  | Cable, 131.2' (40m)                 |
| R9000-CAMT | Camera head with 512hz Transmitter  |
| R9000-RCV  | Receiver, 512hz                     |
| R9000-BALL | Replacement Ball Guide              |
| R9000-SKID | Replacement Skid Guide              |
| SD-4GB     | 4GB SD Memory Card                  |
| RSD-16GB   | 16GB Micro SD Memory Card w/Adapter |

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View R9000-SKID on WIN SOURCE](#)
-  [REED Instruments Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management